



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

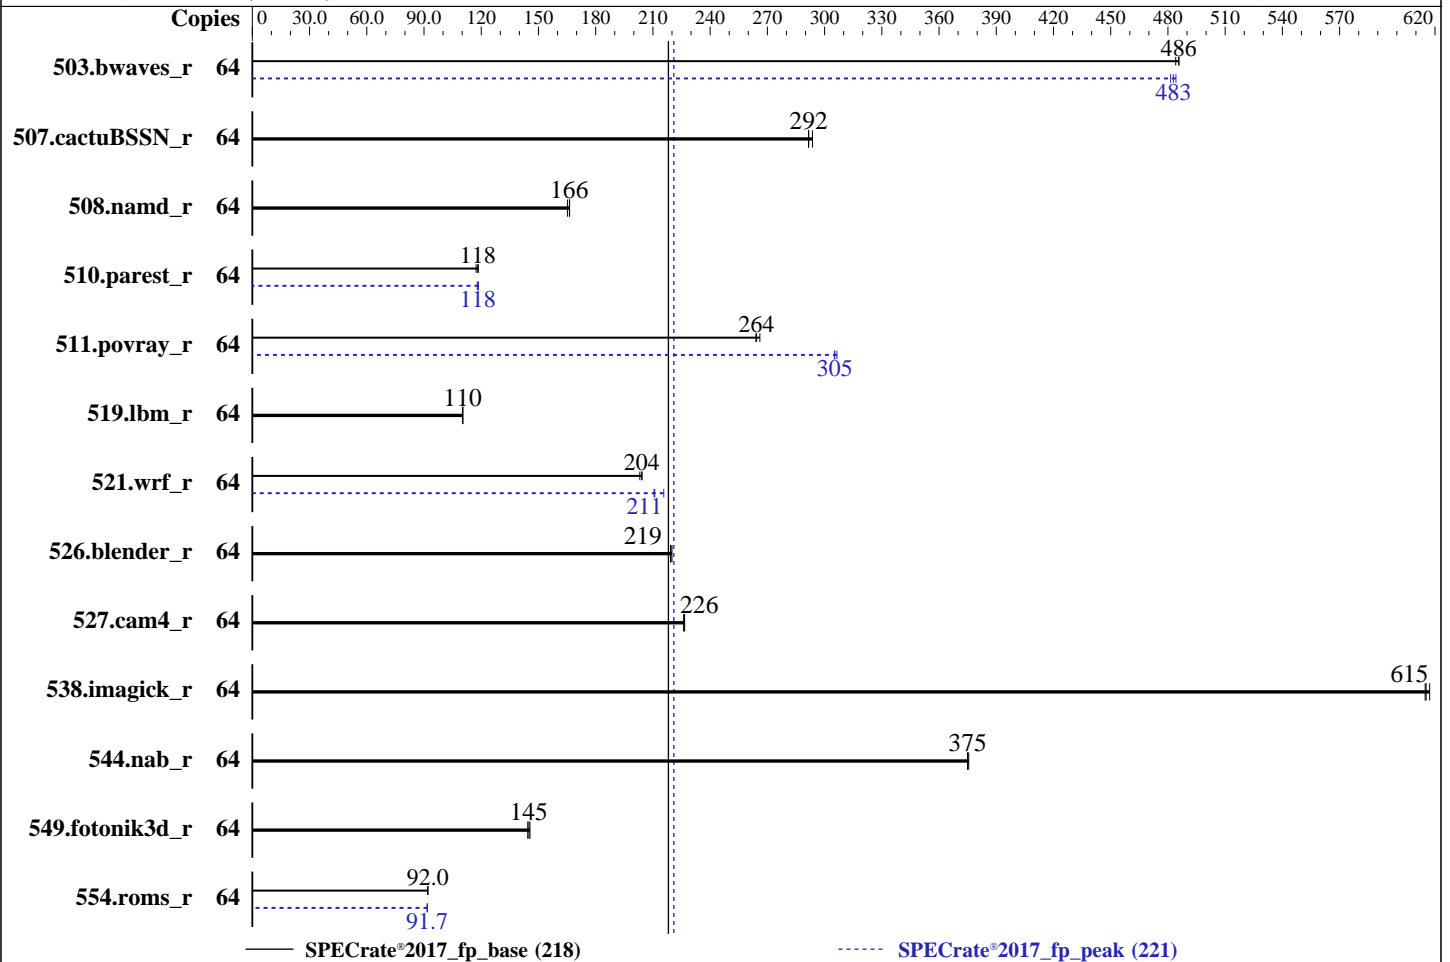

Hardware

CPU Name: Intel Xeon Gold 6226R
 Max MHz: 3900
 Nominal: 2900
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 (chip)s
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: CentOS Linux release 8.2.2004 (Core)
 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++
 Compiler Build 20200306 for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran
 Compiler Build 20200306 for Linux
 Parallel: No
 Firmware: Version 3.3 released Feb-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1326	484	<u>1321</u>	<u>486</u>	1321	486	64	<u>1329</u>	<u>483</u>	1333	481	1325	484
507.cactuBSSN_r	64	278	292	276	294	<u>278</u>	<u>292</u>	64	278	292	276	294	<u>278</u>	<u>292</u>
508.namd_r	64	<u>366</u>	<u>166</u>	366	166	368	165	64	<u>366</u>	<u>166</u>	366	166	368	165
510.parest_r	64	<u>1417</u>	<u>118</u>	1427	117	1413	118	64	1412	119	<u>1416</u>	<u>118</u>	1420	118
511.povray_r	64	562	266	<u>565</u>	<u>264</u>	566	264	64	<u>489</u>	<u>305</u>	488	306	490	305
519.lbm_r	64	612	110	611	110	<u>611</u>	<u>110</u>	64	612	110	611	110	<u>611</u>	<u>110</u>
521.wrf_r	64	706	203	702	204	<u>702</u>	<u>204</u>	64	665	216	<u>680</u>	<u>211</u>	681	211
526.blender_r	64	<u>444</u>	<u>219</u>	443	220	445	219	64	<u>444</u>	<u>219</u>	443	220	445	219
527.cam4_r	64	494	227	<u>495</u>	<u>226</u>	495	226	64	494	227	<u>495</u>	<u>226</u>	495	226
538.imagick_r	64	258	617	259	615	<u>259</u>	<u>615</u>	64	258	617	259	615	<u>259</u>	<u>615</u>
544.nab_r	64	287	375	<u>287</u>	<u>375</u>	287	376	64	287	375	<u>287</u>	<u>375</u>	287	376
549.fotonik3d_r	64	<u>1720</u>	<u>145</u>	1713	146	1727	144	64	<u>1720</u>	<u>145</u>	1713	146	1727	144
554.roms_r	64	1105	92.1	<u>1106</u>	<u>92.0</u>	1107	91.8	64	<u>1107</u>	<u>91.9</u>	1110	91.6	<u>1109</u>	<u>91.7</u>

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218
SPECrate®2017_fp_peak = 221

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Feb-2021
Hardware Availability: Aug-2020
Software Availability: Jun-2020

General Notes

Binaries compiled on a system with 2x Intel Cascade Lake CPU 4214R + 384 GB RAM memory using Centos 8.2 x86_64
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the Centos 8.2 x86_64, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
SNC = Enable
Stale AtoS = Disable
IMC Interleaving = 1-way Interleave
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Tue Feb 9 00:33:00 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
Stepping:               7
CPU MHz:                3470.185
CPU max MHz:            3900.0000
CPU min MHz:            1200.0000
BogoMIPS:               5800.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               22528K
NUMA node0 CPU(s):     0-3,8-11,32-35,40-43
NUMA node1 CPU(s):     4-7,12-15,36-39,44-47
NUMA node2 CPU(s):     16-19,24-27,48-51,56-59
NUMA node3 CPU(s):     20-23,28-31,52-55,60-63

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218
SPECrate®2017_fp_peak = 221

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Feb-2021
Hardware Availability: Aug-2020
Software Availability: Jun-2020

Platform Notes (Continued)

```

physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43
node 0 size: 95326 MB
node 0 free: 86143 MB
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47
node 1 size: 96764 MB
node 1 free: 89098 MB
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59
node 2 size: 96764 MB
node 2 free: 88762 MB
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63
node 3 size: 96763 MB
node 3 free: 89007 MB
node distances:
node  0  1  2  3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

```

```

From /proc/meminfo
MemTotal:      394874028 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 8.2.2004 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.2 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="8 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8 (Core)"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.2.2004 (Core)
system-release: CentOS Linux release 8.2.2004 (Core)
system-release-cpe: cpe:/o:centos:centos:8

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

Platform Notes (Continued)

uname -a:

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri May 8 10:59:10 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Feb 8 17:32

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl-home	xfs	392G	146G	247G	38%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Tyrone Systems
Product:	Tyrone Camarero DS400TOG-424RT2
Product Family:	SMC X11
Serial:	A309085X0907231

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x NO DIMM NO DIMM
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	3.3
BIOS Date:	02/21/2020

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Feb-2021
Hardware Availability: Aug-2020
Software Availability: Jun-2020

Platform Notes (Continued)

BIOS Revision: 5.14

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C   | 511.povray_r(base) 526.blender_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C   | 511.povray_r(peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218
SPECrate®2017_fp_peak = 221

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Feb-2021
Hardware Availability: Aug-2020
Software Availability: Jun-2020

Compiler Version Notes (Continued)

C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218
SPECrate®2017_fp_peak = 221

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Feb-2021
Hardware Availability: Aug-2020
Software Availability: Jun-2020

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib

-ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 221

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-08 14:02:59-0500.

Report generated on 2021-03-16 15:26:33 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.