



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro


A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

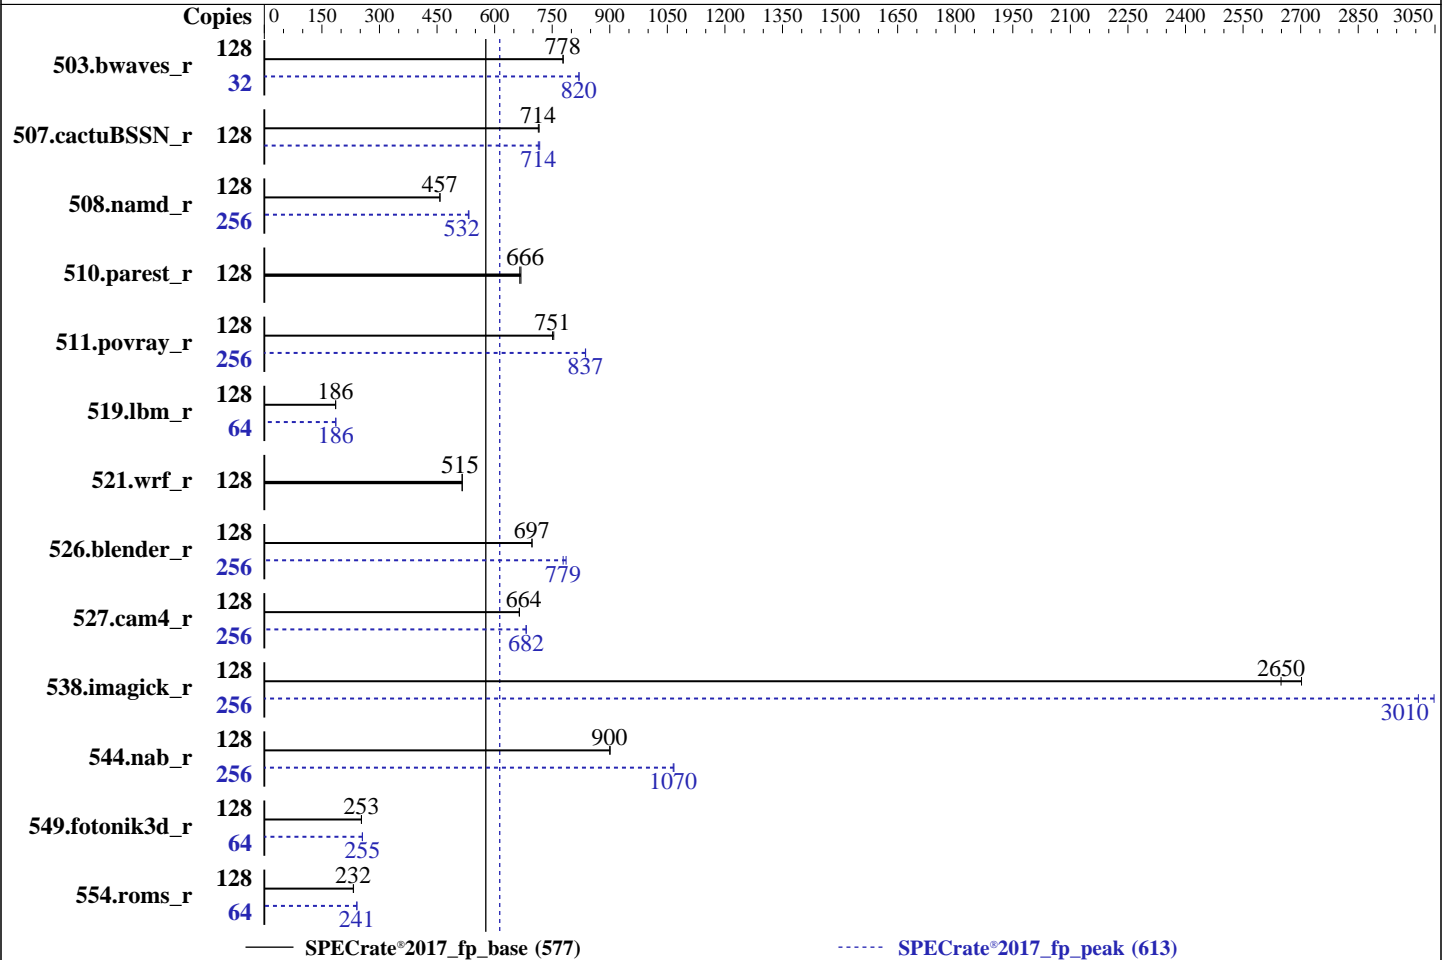

Hardware

CPU Name: AMD EPYC 7713
Max MHz: 3675
Nominal: 2000
Enabled: 128 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: Ubuntu 20.04.1 LTS
Kernel 5.4.0-66-generic
Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
Parallel: No
Firmware: Version 2.0 released Mar-2021
File System: ext4
System State: Run level 5 (multi-user with GUI)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc: jemalloc memory allocator library v5.2.0
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<u>1650</u>	<u>778</u>	1648	779			32	391	820	<u>392</u>	<u>820</u>		
507.cactuBSSN_r	128	<u>227</u>	<u>714</u>	226	716			128	226	717	<u>227</u>	<u>714</u>		
508.namd_r	128	<u>266</u>	<u>457</u>	266	458			256	456	533	<u>457</u>	<u>532</u>		
510.parest_r	128	501	669	<u>503</u>	<u>666</u>			128	501	669	<u>503</u>	<u>666</u>		
511.povray_r	128	396	754	<u>398</u>	<u>751</u>			256	714	837	<u>715</u>	<u>837</u>		
519.lbm_r	128	<u>726</u>	<u>186</u>	726	186			64	<u>362</u>	<u>186</u>	362	186		
521.wrf_r	128	<u>557</u>	<u>515</u>	556	516			128	<u>557</u>	<u>515</u>	556	516		
526.blender_r	128	<u>280</u>	<u>697</u>	279	698			256	<u>501</u>	<u>779</u>	496	786		
527.cam4_r	128	337	665	<u>337</u>	<u>664</u>			256	656	683	<u>657</u>	<u>682</u>		
538.imagick_r	128	118	2700	<u>120</u>	<u>2650</u>			256	209	3050	<u>212</u>	<u>3010</u>		
544.nab_r	128	239	901	<u>239</u>	<u>900</u>			256	<u>404</u>	<u>1070</u>	404	1070		
549.fotonik3d_r	128	1971	253	<u>1972</u>	<u>253</u>			64	<u>977</u>	<u>255</u>	976	256		
554.roms_r	128	<u>877</u>	<u>232</u>	875	232			64	<u>422</u>	<u>241</u>	421	241		

SPECrate®2017_fp_base = **577**

SPECrate®2017_fp_peak = **613**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6, AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/root/spec/amd_rate_aocc300_milan_A_lib/64;/root/spec/amd_rate_aocc300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 240
Package Power Limit Control = Manual
Package Power Limit = 240

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

APBDIS = 1
NUMA Nodes Per Socket = NPS4

sysinfo program /root/spec/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on smc Sun Mar 14 07:55:23 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7713 64-Core Processor
2 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 256
On-line CPU(s) list: 0-255
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7713 64-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 1673.950
CPU max MHz: 2000.0000
CPU min MHz: 1500.0000
BogoMIPS: 3992.60

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```

Virtualization:          AMD-V
L1d cache:              4 MiB
L1i cache:              4 MiB
L2 cache:               64 MiB
L3 cache:               512 MiB
NUMA node0 CPU(s):     0-7,128-135
NUMA node1 CPU(s):     8-15,136-143
NUMA node2 CPU(s):     16-23,144-151
NUMA node3 CPU(s):     24-31,152-159
NUMA node4 CPU(s):     32-39,160-167
NUMA node5 CPU(s):     40-47,168-175
NUMA node6 CPU(s):     48-55,176-183
NUMA node7 CPU(s):     56-63,184-191
NUMA node8 CPU(s):     64-71,192-199
NUMA node9 CPU(s):     72-79,200-207
NUMA node10 CPU(s):    80-87,208-215
NUMA node11 CPU(s):    88-95,216-223
NUMA node12 CPU(s):    96-103,224-231
NUMA node13 CPU(s):    104-111,232-239
NUMA node14 CPU(s):    112-119,240-247
NUMA node15 CPU(s):    120-127,248-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7 128 129 130 131 132 133 134 135
node 0 size: 64380 MB
node 0 free: 63529 MB
node 1 cpus: 8 9 10 11 12 13 14 15 136 137 138 139 140 141 142 143
node 1 size: 64507 MB
node 1 free: 63707 MB
node 2 cpus: 16 17 18 19 20 21 22 23 144 145 146 147 148 149 150 151
node 2 size: 64508 MB
node 2 free: 63780 MB
node 3 cpus: 24 25 26 27 28 29 30 31 152 153 154 155 156 157 158 159
node 3 size: 64507 MB
node 3 free: 63798 MB
node 4 cpus: 32 33 34 35 36 37 38 39 160 161 162 163 164 165 166 167
node 4 size: 64508 MB
node 4 free: 62897 MB
node 5 cpus: 40 41 42 43 44 45 46 47 168 169 170 171 172 173 174 175
node 5 size: 64507 MB
node 5 free: 63808 MB
node 6 cpus: 48 49 50 51 52 53 54 55 176 177 178 179 180 181 182 183
node 6 size: 64508 MB
node 6 free: 63823 MB
node 7 cpus: 56 57 58 59 60 61 62 63 184 185 186 187 188 189 190 191
node 7 size: 64495 MB
node 7 free: 63928 MB
node 8 cpus: 64 65 66 67 68 69 70 71 192 193 194 195 196 197 198 199
node 8 size: 64508 MB
node 8 free: 63306 MB
node 9 cpus: 72 73 74 75 76 77 78 79 200 201 202 203 204 205 206 207
node 9 size: 64507 MB
node 9 free: 63649 MB
node 10 cpus: 80 81 82 83 84 85 86 87 208 209 210 211 212 213 214 215
node 10 size: 64508 MB
node 10 free: 63908 MB
node 11 cpus: 88 89 90 91 92 93 94 95 216 217 218 219 220 221 222 223
node 11 size: 64507 MB
node 11 free: 63758 MB
node 12 cpus: 96 97 98 99 100 101 102 103 224 225 226 227 228 229 230 231
node 12 size: 64508 MB
node 12 free: 63473 MB
node 13 cpus: 104 105 106 107 108 109 110 111 232 233 234 235 236 237 238 239
node 13 size: 64483 MB
node 13 free: 63882 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```

node 14 cpus: 112 113 114 115 116 117 118 119 240 241 242 243 244 245 246 247
node 14 size: 64508 MB
node 14 free: 63916 MB
node 15 cpus: 120 121 122 123 124 125 126 127 248 249 250 251 252 253 254 255
node 15 size: 64505 MB
node 15 free: 63948 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
 3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
 4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
 5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
 6:  12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
 7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
 8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
 9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10:  32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11:  32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12:  32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13:  32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14:  32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11
15:  32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10

```

```

From /proc/meminfo
MemTotal:      1056726068 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
NAME="Ubuntu"
VERSION="20.04.1 LTS (Focal Fossa)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.1 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"

```

```

uname -a:
Linux smc 5.4.0-66-generic #74-Ubuntu SMP Wed Jan 27 22:54:38 UTC 2021 x86_64 x86_64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6, AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Platform Notes (Continued)

x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
srbds:	Not affected
tsx_async_abort:	Not affected

run-level 5 Mar 14 01:25

SPEC is set to: /root/spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	16G	170G	9%	/

From /sys/devices/virtual/dmi/id

```

BIOS: American Megatrends International, LLC. 2.0 03/09/2021
Vendor: Supermicro
Product: H12DSGQ
Product Family: SMC H12
Serial: 123456789

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

16x Micron Technology 36ASF8G72PZ-3G2E1 64 GB 2 rank 3200
16x NO DIMM Unknown

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6, AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6, AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6, AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6, AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6, AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Peak Optimization Flags (Continued)

519.lbm_r (continued):

```
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

510.parest_r: basepeak = yes

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-lamdlibm -ljemalloc -lflang -lflangrti
```

549.fotonik3d_r: Same as 503.bwaves_r

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6, AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Peak Optimization Flags (Continued)

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
521.wrf_r: basepeak = yes
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revB.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124GQ-NART
(H12DDG-Q-CPU6 , AMD EPYC 7713)

SPECrate®2017_fp_base = 577

SPECrate®2017_fp_peak = 613

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2021-03-14 03:55:22-0400.

Report generated on 2021-03-30 15:33:45 by CPU2017 PDF formatter v6442.

Originally published on 2021-03-30.