



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2021  
Hardware Availability: Mar-2021  
Software Availability: Mar-2021

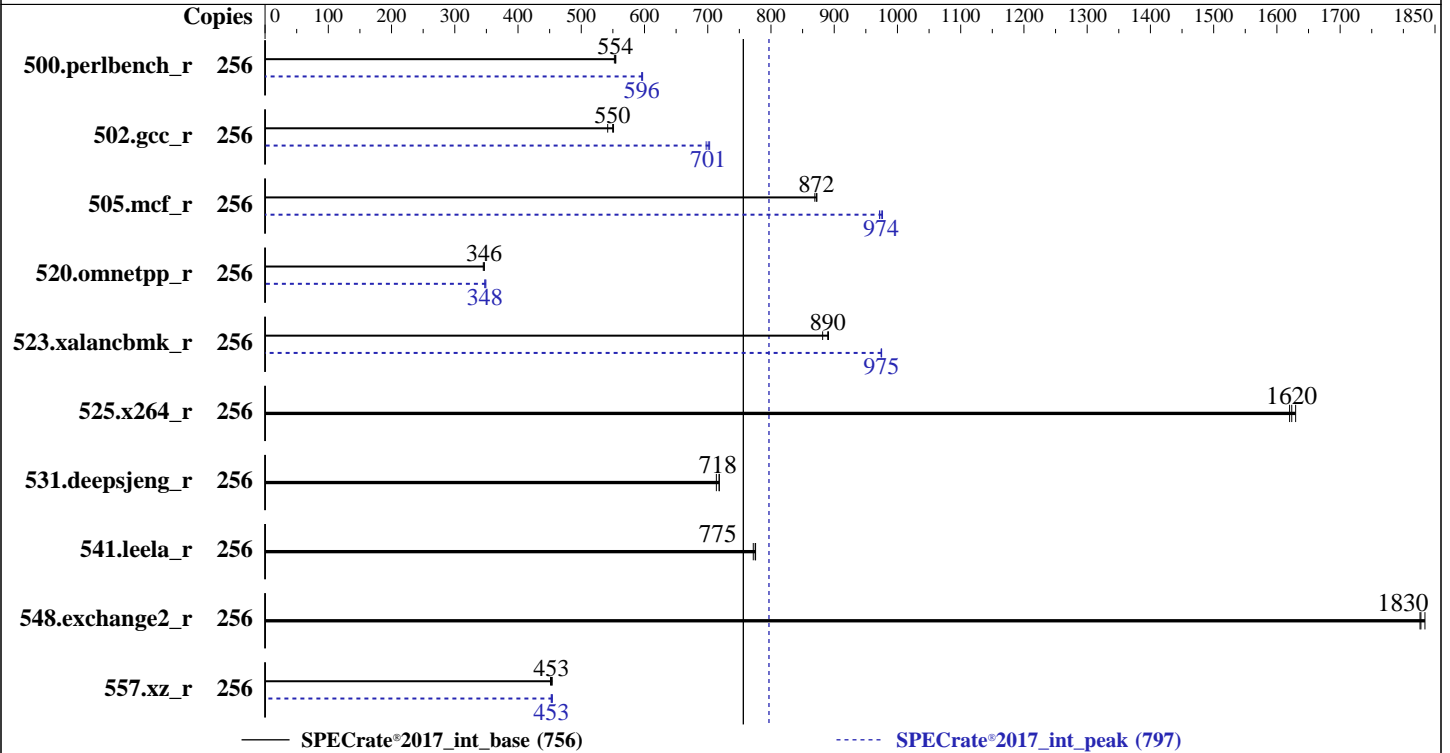

### Hardware

CPU Name: AMD EPYC 7713  
 Max MHz: 3675  
 Nominal: 2000  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 Kernel 4.18.0-240.el8.x86\_64  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version D8E115E 2.01 released Mar-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** Mar-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	<b>735</b>	<b>554</b>	735	555	738	552	256	<b>684</b>	<b>596</b>	683	597	684	596
502.gcc_r	256	<b>660</b>	<b>550</b>	658	551	669	542	256	516	703	520	697	<b>517</b>	<b>701</b>
505.mcf_r	256	474	873	476	869	<b>475</b>	<b>872</b>	256	424	976	426	972	<b>425</b>	<b>974</b>
520.omnetpp_r	256	973	345	<b>970</b>	<b>346</b>	969	347	256	962	349	966	348	<b>966</b>	<b>348</b>
523.xalancbmk_r	256	303	891	<b>304</b>	<b>890</b>	307	882	256	278	974	<b>277</b>	<b>975</b>	277	975
525.x264_r	256	<b>276</b>	<b>1620</b>	277	1620	275	1630	256	<b>276</b>	<b>1620</b>	277	1620	275	1630
531.deepsjeng_r	256	411	714	408	718	<b>409</b>	<b>718</b>	256	411	714	408	718	<b>409</b>	<b>718</b>
541.leela_r	256	<b>547</b>	<b>775</b>	547	776	549	772	256	<b>547</b>	<b>775</b>	547	776	549	772
548.exchange2_r	256	<b>367</b>	<b>1830</b>	367	1830	366	1830	256	<b>367</b>	<b>1830</b>	367	1830	366	1830
557.xz_r	256	613	451	<b>610</b>	<b>453</b>	609	454	256	611	452	<b>610</b>	<b>453</b>	609	454

SPECrate®2017\_int\_base = **756**

SPECrate®2017\_int\_peak = **797**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.  
'echo 0 > /proc/sys/kernel/numa_balancing' run as root to eliminate NUMA location probing; the workloads are all bound to specific NUMA nodes.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:  
LD_LIBRARY_PATH =  
    "/home/cpu2017-1.1.5-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/6  
    4;/home/cpu2017-1.1.5-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/  
    32:"  
MALLOC_CONF = "retain:true"
```

```
Environment variables set by runcpu during the 523.xalancbmk_r peak run:  
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode

4-Link xGMI Max Speed set to 16Gbps

SOC P-States set to P0

NUMA nodes per socket set to NPS4

ACPI SRAT L3 Cache as NUMA Domain set to Enable

L2 Stream HW Prefetcher set to Disable

Memory interleaving set to Disabled

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** Mar-2021

### Platform Notes (Continued)

sysinfo program /home/cpu2017-1.1.5-amd-aocc300-milan-A1/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on localhost.localdomain Fri Jun 22 19:30:35 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7713 64-Core Processor
 2 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 256
On-line CPU(s) list: 0-255
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7713 64-Core Processor
Stepping: 1
CPU MHz: 2333.907
CPU max MHz: 2000.0000
CPU min MHz: 1500.0000
BogoMIPS: 3992.19
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

```

L3 cache:                32768K
NUMA node0 CPU(s):      0-7,128-135
NUMA node1 CPU(s):      8-15,136-143
NUMA node2 CPU(s):      16-23,144-151
NUMA node3 CPU(s):      24-31,152-159
NUMA node4 CPU(s):      32-39,160-167
NUMA node5 CPU(s):      40-47,168-175
NUMA node6 CPU(s):      48-55,176-183
NUMA node7 CPU(s):      56-63,184-191
NUMA node8 CPU(s):      64-71,192-199
NUMA node9 CPU(s):      72-79,200-207
NUMA node10 CPU(s):     80-87,208-215
NUMA node11 CPU(s):     88-95,216-223
NUMA node12 CPU(s):     96-103,224-231
NUMA node13 CPU(s):    104-111,232-239
NUMA node14 CPU(s):    112-119,240-247
NUMA node15 CPU(s):    120-127,248-255

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_omsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7 128 129 130 131 132 133 134 135
node 0 size: 32054 MB
node 0 free: 31890 MB
node 1 cpus: 8 9 10 11 12 13 14 15 136 137 138 139 140 141 142 143
node 1 size: 32236 MB
node 1 free: 32072 MB
node 2 cpus: 16 17 18 19 20 21 22 23 144 145 146 147 148 149 150 151
node 2 size: 32240 MB
node 2 free: 32070 MB
node 3 cpus: 24 25 26 27 28 29 30 31 152 153 154 155 156 157 158 159
node 3 size: 32242 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

```

node 3 free: 32060 MB
node 4 cpus: 32 33 34 35 36 37 38 39 160 161 162 163 164 165 166 167
node 4 size: 32236 MB
node 4 free: 32043 MB
node 5 cpus: 40 41 42 43 44 45 46 47 168 169 170 171 172 173 174 175
node 5 size: 32230 MB
node 5 free: 32048 MB
node 6 cpus: 48 49 50 51 52 53 54 55 176 177 178 179 180 181 182 183
node 6 size: 32246 MB
node 6 free: 32082 MB
node 7 cpus: 56 57 58 59 60 61 62 63 184 185 186 187 188 189 190 191
node 7 size: 32228 MB
node 7 free: 32080 MB
node 8 cpus: 64 65 66 67 68 69 70 71 192 193 194 195 196 197 198 199
node 8 size: 32240 MB
node 8 free: 32076 MB
node 9 cpus: 72 73 74 75 76 77 78 79 200 201 202 203 204 205 206 207
node 9 size: 32210 MB
node 9 free: 32065 MB
node 10 cpus: 80 81 82 83 84 85 86 87 208 209 210 211 212 213 214 215
node 10 size: 32244 MB
node 10 free: 32114 MB
node 11 cpus: 88 89 90 91 92 93 94 95 216 217 218 219 220 221 222 223
node 11 size: 32246 MB
node 11 free: 32109 MB
node 12 cpus: 96 97 98 99 100 101 102 103 224 225 226 227 228 229 230 231
node 12 size: 32248 MB
node 12 free: 32103 MB
node 13 cpus: 104 105 106 107 108 109 110 111 232 233 234 235 236 237 238 239
node 13 size: 32242 MB
node 13 free: 32114 MB
node 14 cpus: 112 113 114 115 116 117 118 119 240 241 242 243 244 245 246 247
node 14 size: 32242 MB
node 14 free: 32074 MB
node 15 cpus: 120 121 122 123 124 125 126 127 248 249 250 251 252 253 254 255
node 15 size: 32246 MB
node 15 free: 32027 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  1: 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  2: 12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
  3: 12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
  4: 12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
  5: 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
  6: 12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
  7: 12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** Mar-2021

### Platform Notes (Continued)

8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

From /proc/meminfo

MemTotal: 528159944 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"  
VERSION="8.3 (Ootpa)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="8.3"  
PLATFORM\_ID="platform:el8"  
PRETTY\_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"  
ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)  
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.el8.x86\_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** Mar-2021

### Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jun 22 19:12

```
SPEC is set to: /home/cpu2017-1.1.5-amd-aocc300-milan-A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   819G   98G  721G  12% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR665 MB
Product Family: ThinkSystem
Serial:          1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
 16x Unknown Unknown
```

```
BIOS:
 BIOS Vendor:      Lenovo
 BIOS Version:    D8E115E-2.01
 BIOS Date:       03/04/2021
 BIOS Revision:   2.1
 Firmware Revision: 3.1
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** Mar-2021

### Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C | 502.gcc\_r(peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 523.xalancbmk\_r(peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

### Compiler Version Notes (Continued)

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C++ | 523.xalancbmk\_r(peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

### Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -m64 -std=c++98

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -ljemalloc
```

523.xalancbmk\_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto

```
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-ljemalloc
```

531.deepsjeng\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665  
2.00 GHz, AMD EPYC 7713

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 797

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v115aocc3/amd\_rate\_aocc300\_milan\_A\_lib/32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v115aocc3/amd\_rate\_aocc300\_milan\_A\_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan-C.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan-C.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2018-06-22 07:30:34-0400.

Report generated on 2021-04-14 14:12:51 by CPU2017 PDF formatter v6442.

Originally published on 2021-04-13.