



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

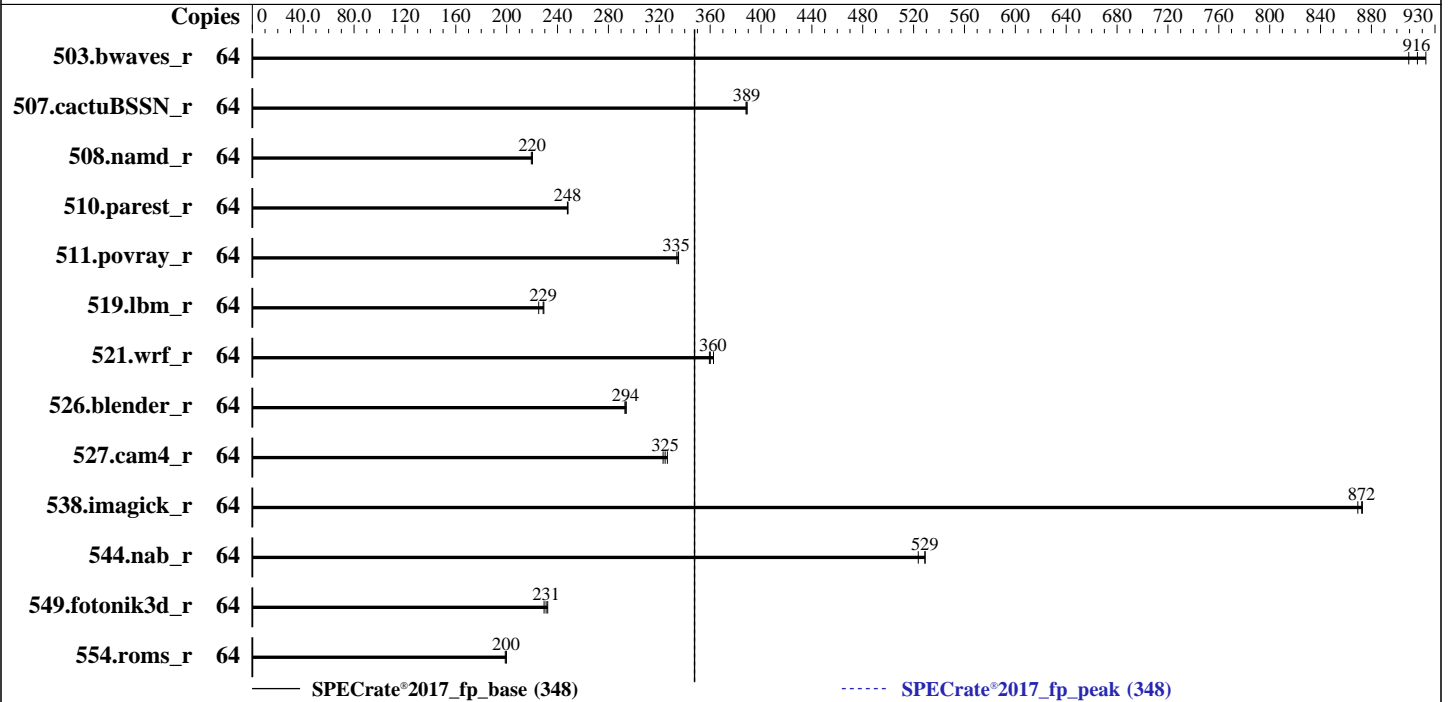

Hardware

CPU Name: Intel Xeon Platinum 8356H
 Max MHz: 4400
 Nominal: 3900
 Enabled: 32 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200V-R, running at 2933)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version 4.10.03 released Jan-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	706	909	695	923	<u>701</u>	<u>916</u>	64	706	909	695	923	<u>701</u>	<u>916</u>
507.cactuBSSN_r	64	208	389	209	388	<u>208</u>	<u>389</u>	64	208	389	209	388	<u>208</u>	<u>389</u>
508.namd_r	64	276	220	277	219	<u>276</u>	<u>220</u>	64	276	220	277	219	<u>276</u>	<u>220</u>
510.parest_r	64	676	248	675	248	<u>675</u>	<u>248</u>	64	676	248	675	248	<u>675</u>	<u>248</u>
511.povray_r	64	446	335	448	334	<u>446</u>	<u>335</u>	64	446	335	448	334	<u>446</u>	<u>335</u>
519.lbm_r	64	300	225	294	229	<u>295</u>	<u>229</u>	64	300	225	294	229	<u>295</u>	<u>229</u>
521.wrf_r	64	395	363	399	359	<u>398</u>	<u>360</u>	64	395	363	399	359	<u>398</u>	<u>360</u>
526.blender_r	64	333	293	<u>332</u>	<u>294</u>	332	294	64	333	293	<u>332</u>	<u>294</u>	332	294
527.cam4_r	64	347	323	343	326	<u>345</u>	<u>325</u>	64	347	323	343	326	<u>345</u>	<u>325</u>
538.imagick_r	64	<u>182</u>	<u>872</u>	182	873	183	869	64	<u>182</u>	<u>872</u>	182	873	183	869
544.nab_r	64	204	529	206	524	<u>204</u>	<u>529</u>	64	204	529	206	524	<u>204</u>	<u>529</u>
549.fotonik3d_r	64	1087	229	<u>1080</u>	<u>231</u>	1074	232	64	1087	229	<u>1080</u>	<u>231</u>	1074	232
554.roms_r	64	509	200	<u>510</u>	<u>200</u>	511	199	64	509	200	<u>510</u>	<u>200</u>	511	199

SPECrate®2017_fp_base = **348**

SPECrate®2017_fp_peak = **348**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to Performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

General Notes (Continued)

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
CLE Support set to Disable
Sub NUMA Cluster (SNC) set to Enable
Intel Hyper Threading Technology set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Thu Apr 8 17:10:02 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8356H CPU @ 3.90GHz
4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 2 3 5 6 10 17 19 28
physical 1: cores 2 3 6 13 18 24 28 29

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Apr-2021
Hardware Availability: Sep-2020
Software Availability: Jan-2021

Platform Notes (Continued)

physical 2: cores 2 10 13 17 18 19 28 29
physical 3: cores 2 6 10 17 18 19 28 29

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8356H CPU @ 3.90GHz
Stepping:               11
CPU MHz:                4300.147
CPU max MHz:            4400.0000
CPU min MHz:            1200.0000
BogoMIPS:               7800.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               36608K
NUMA node0 CPU(s):     0,1,4,5,32,33,36,37
NUMA node1 CPU(s):     2,3,6,7,34,35,38,39
NUMA node2 CPU(s):     8,9,12,13,40,41,44,45
NUMA node3 CPU(s):     10,11,14,15,42,43,46,47
NUMA node4 CPU(s):     16,17,19,20,48,49,51,52
NUMA node5 CPU(s):     18,21-23,50,53-55
NUMA node6 CPU(s):     24,26-28,56,58-60
NUMA node7 CPU(s):     25,29-31,57,61-63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 4 5 32 33 36 37
node 0 size: 192070 MB
node 0 free: 186019 MB
node 1 cpus: 2 3 6 7 34 35 38 39
node 1 size: 193533 MB
node 1 free: 189833 MB
node 2 cpus: 8 9 12 13 40 41 44 45
node 2 size: 193533 MB
node 2 free: 189800 MB
node 3 cpus: 10 11 14 15 42 43 46 47
node 3 size: 193533 MB
node 3 free: 189757 MB
node 4 cpus: 16 17 19 20 48 49 51 52
node 4 size: 193533 MB
node 4 free: 189847 MB
node 5 cpus: 18 21 22 23 50 53 54 55
node 5 size: 193533 MB
node 5 free: 189841 MB
node 6 cpus: 24 26 27 28 56 58 59 60
node 6 size: 193506 MB
node 6 free: 189817 MB
node 7 cpus: 25 29 30 31 57 61 62 63
node 7 size: 193533 MB
node 7 free: 189840 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
0:  10 11 20 20 20 20 20 20
1:  11 10 20 20 20 20 20 20
2:  20 20 10 11 20 20 20 20
3:  20 20 11 10 20 20 20 20
4:  20 20 20 20 10 11 20 20
5:  20 20 20 20 11 10 20 20
6:  20 20 20 20 20 20 10 11
7:  20 20 20 20 20 20 11 10
```

```
From /proc/meminfo
MemTotal: 1583901856 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Platform Notes (Continued)

/sbin/tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.

Preset profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.2"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Apr 8 11:19

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	392G	115G	277G	30%	/home

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

Vendor: Inspur
Product: NF8480M6
Product Family: Family
Serial: 379953176

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor: American Megatrends Inc.
BIOS Version: 04.10.03
BIOS Date: 01/20/2021
BIOS Revision: 5.19

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
 C++, C | 511.povray_r(base) 526.blender_r(base, peak)
 =====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
 Version 2021.1 Build 20201113
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
 Version 2021.1 Build 20201113
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
 C++, C | 511.povray_r(peak)
 =====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
 C++, C | 511.povray_r(base) 526.blender_r(base, peak)
 =====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
 Version 2021.1 Build 20201113
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
 Version 2021.1 Build 20201113
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
 C++, C, Fortran | 507.cactuBSSN_r(base, peak)
 =====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
 Version 2021.1 Build 20201113
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
 Version 2021.1 Build 20201113

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
 Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
 | 554.roms_r(base, peak)
 =====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
 Fortran, C | 521.wrf_r(peak)
 =====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
 Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)
 =====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
 Version 2021.1 Build 20201113
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
 Fortran, C | 521.wrf_r(peak)
 =====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Compiler Version Notes (Continued)

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
521.wrf_r: ifort icc
```

```
527.cam4_r: ifort icx
```

Benchmarks using both C and C++:

```
511.povray_r: icpc icc
```

```
526.blender_r: icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Peak Optimization Flags (Continued)

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 348

Inspur NF8480M6 (Intel Xeon Platinum 8356H)

SPECrate®2017_fp_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-04-08 17:10:01-0400.

Report generated on 2021-04-27 16:26:23 by CPU2017 PDF formatter v6442.

Originally published on 2021-04-27.