



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

## Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6177


Test Date: Apr-2021

Test Sponsor: China Academy of Information and Communications Technology

Hardware Availability: Nov-2020

Tested by: China Academy of Information and Communications Technology

Software Availability: Mar-2021

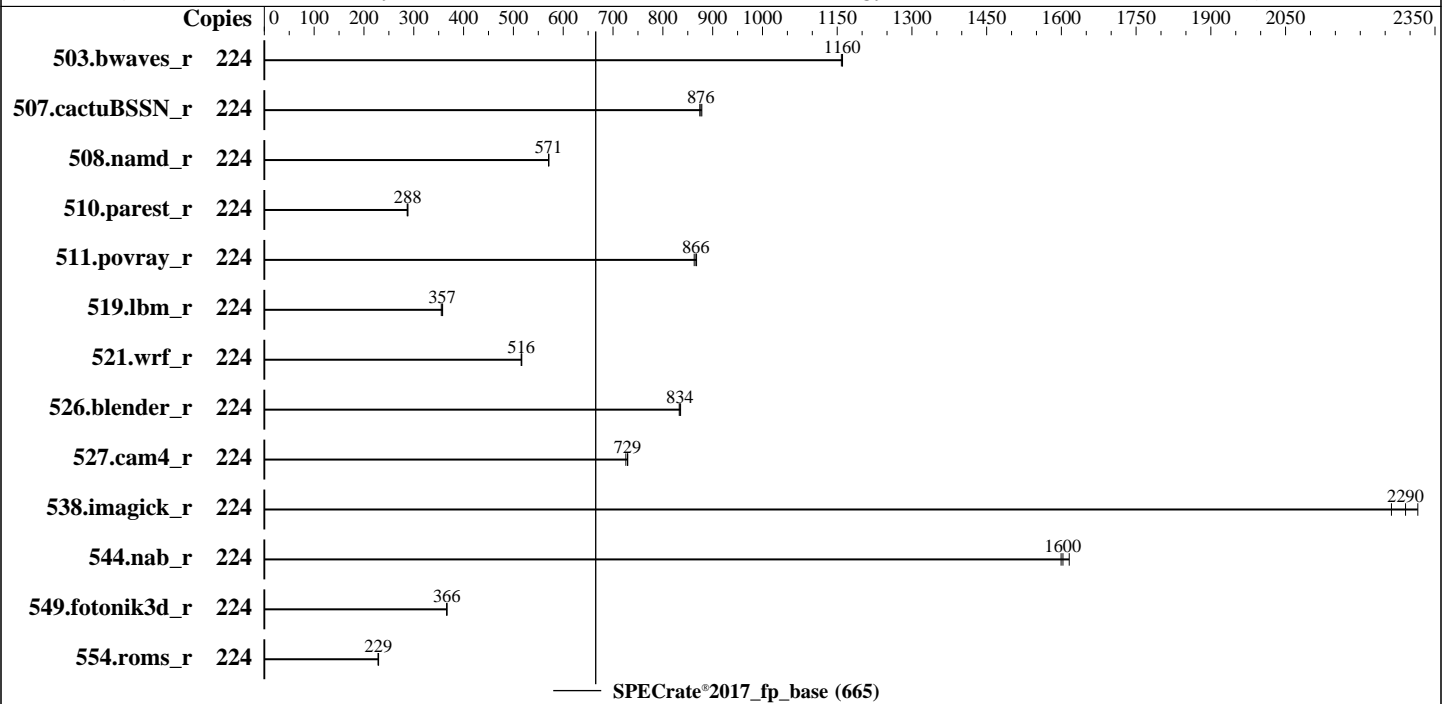

### Hardware

CPU Name: Intel Xeon Platinum 8376HL  
 Max MHz: 4300  
 Nominal: 2600  
 Enabled: 112 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 1 x 3.84 TB SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2(x86\_64)  
 Kernel 5.3.18-22-default  
 Compiler: C/C++: Version 2021.2.0 of Intel oneAPI  
 DPC++/C++ Compiler  
 Build 20210317 for Linux;  
 Fortran: Version 2021.2.0 of Intel Fortran  
 Compiler Classic Build 20210228 for Linux;  
 C/C++: Version 2021.2.0 of Intel C/C++ Compiler  
 Classic Build 20210228 for Linux;  
 Parallel: No  
 Firmware: Version 0.55 released Dec-2020  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

## Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Apr-2021

Hardware Availability: Nov-2020

Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	1935	1160	<b><u>1936</u></b>	<b><u>1160</u></b>	1939	1160							
507.cactuBSSN_r	224	324	874	<b><u>324</u></b>	<b><u>876</u></b>	323	878							
508.namd_r	224	372	571	373	571	<b><u>373</u></b>	<b><u>571</u></b>							
510.parest_r	224	2035	288	<b><u>2035</u></b>	<b><u>288</u></b>	2043	287							
511.povray_r	224	603	868	<b><u>604</u></b>	<b><u>866</u></b>	606	863							
519.lbm_r	224	660	358	<b><u>661</u></b>	<b><u>357</u></b>	665	355							
521.wrf_r	224	973	516	<b><u>973</u></b>	<b><u>516</u></b>	971	517							
526.blender_r	224	<b><u>409</u></b>	<b><u>834</u></b>	410	833	408	836							
527.cam4_r	224	537	730	<b><u>537</u></b>	<b><u>729</u></b>	540	726							
538.imagick_r	224	241	2320	<b><u>243</u></b>	<b><u>2290</u></b>	246	2260							
544.nab_r	224	233	1620	236	1600	<b><u>235</u></b>	<b><u>1600</u></b>							
549.fotonik3d_r	224	2385	366	<b><u>2382</u></b>	<b><u>366</u></b>	2382	367							
554.roms_r	224	1552	229	1559	228	<b><u>1554</u></b>	<b><u>229</u></b>							

SPECrate®2017\_fp\_base = 665

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
SCALING\_GOVERNOR set to powersave

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/opt/intel/oneapi/compiler/2021.2.0/linux/compiler/lib/intel64:/usr/local/jemalloc64-5.0.1"  
MALLOC\_CONF = "retain:true"

## General Notes

Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Huawei**  
(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

**Huawei 2488H V6 (Intel Xeon Platinum 8376HL)**

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6177

**Test Date:** Apr-2021

**Test Sponsor:** China Academy of Information and Communications Technology

**Hardware Availability:** Nov-2020

**Tested by:** China Academy of Information and Communications Technology

**Software Availability:** Mar-2021

## General Notes (Continued)

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

XPT Prefetch Set to Enabled

Sysinfo program /home/spec2017115/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost Fri Apr 23 15:59:26 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8376HL CPU @ 2.60GHz

4 "physical id"s (chips)

224 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

**Huawei 2488H V6 (Intel Xeon Platinum 8376HL)**

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Apr-2021

**Hardware Availability:** Nov-2020

**Software Availability:** Mar-2021

## Platform Notes (Continued)

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         46 bits physical, 48 bits virtual
CPU(s):                224
On-line CPU(s) list:  0-223
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8376HL CPU @ 2.60GHz
Stepping:               11
CPU MHz:                2599.994
CPU max MHz:           4300.0000
CPU min MHz:           1000.0000
BogoMIPS:               5200.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld
arch_capabilities

```

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

## Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Apr-2021

**Hardware Availability:** Nov-2020

**Software Availability:** Mar-2021

### Platform Notes (Continued)

cache size : 39424 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128 129 133 134 135

node 0 size: 192068 MB

node 0 free: 190462 MB

node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131 132 136 137 138 139

node 1 size: 193529 MB

node 1 free: 192656 MB

node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154 155 156 157 161 162 163

node 2 size: 193495 MB

node 2 free: 192670 MB

node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158 159 160 164 165 166 167

node 3 size: 193529 MB

node 3 free: 192692 MB

node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182 183 184 185 189 190 191

node 4 size: 193529 MB

node 4 free: 192691 MB

node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186 187 188 192 193 194 195

node 5 size: 193529 MB

node 5 free: 192716 MB

node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205 210 211 212 213 217 218 219

node 6 size: 193529 MB

node 6 free: 192735 MB

node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208 209 214 215 216 220 221 222 223

node 7 size: 193240 MB

node 7 free: 192099 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	11	20	20	20	20	20	20
1:	11	10	20	20	20	20	20	20
2:	20	20	10	11	20	20	20	20
3:	20	20	11	10	20	20	20	20
4:	20	20	20	20	10	11	20	20
5:	20	20	20	20	11	10	20	20
6:	20	20	20	20	20	20	10	11
7:	20	20	20	20	20	20	11	10

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Huawei**  
(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

**Huawei 2488H V6 (Intel Xeon Platinum 8376HL)**

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6177

**Test Date:** Apr-2021

**Test Sponsor:** China Academy of Information and Communications Technology

**Hardware Availability:** Nov-2020

**Tested by:** China Academy of Information and Communications Technology

**Software Availability:** Mar-2021

## Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      1583565656 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has powersave

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):                Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

run-level 5 Apr 23 11:37

SPEC is set to: /home/spec2017115

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3        xfs       2.2T      76G  2.1T   4% /home
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Huawei**  
(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

**Huawei 2488H V6 (Intel Xeon Platinum 8376HL)**

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6177

**Test Date:** Apr-2021

**Test Sponsor:** China Academy of Information and Communications Technology

**Hardware Availability:** Nov-2020

**Tested by:** China Academy of Information and Communications Technology

**Software Availability:** Mar-2021

## Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

Vendor: Huawei  
Product: 2488H V6  
Product Family: Cedar Island  
Serial: Huawei

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200

BIOS:

BIOS Vendor: ByoSoft  
BIOS Version: 0.55  
BIOS Date: 12/16/2020

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.2.0 Build 20210317  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.2.0 Build 20210317  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.2.0 Build 20210317  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.2.0 Build 20210317

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Huawei**  
(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

**Huawei 2488H V6 (Intel Xeon Platinum 8376HL)**

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6177

**Test Date:** Apr-2021

**Test Sponsor:** China Academy of Information and Communications Technology

**Hardware Availability:** Nov-2020

**Tested by:** China Academy of Information and Communications Technology

**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.2.0 Build 20210317

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.2.0 Build 20210317

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.2.0 Build 20210228\_000000

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.2.0 Build 20210228\_000000

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.2.0 Build 20210228\_000000

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.2.0 Build 20210317

Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifort

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Huawei**  
(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

**Huawei 2488H V6 (Intel Xeon Platinum 8376HL)**

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Apr-2021

**Hardware Availability:** Nov-2020

**Software Availability:** Mar-2021

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifort
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017\_fp\_base = 665

**Huawei 2488H V6 (Intel Xeon Platinum 8376HL)**

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Apr-2021

**Hardware Availability:** Nov-2020

**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revC.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revC.html)

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.3.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revC.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revC.xml)

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-04-23 03:59:25-0400.

Report generated on 2021-05-12 13:43:51 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-11.