



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECrate®2017\_fp\_base = 352

### PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

### SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

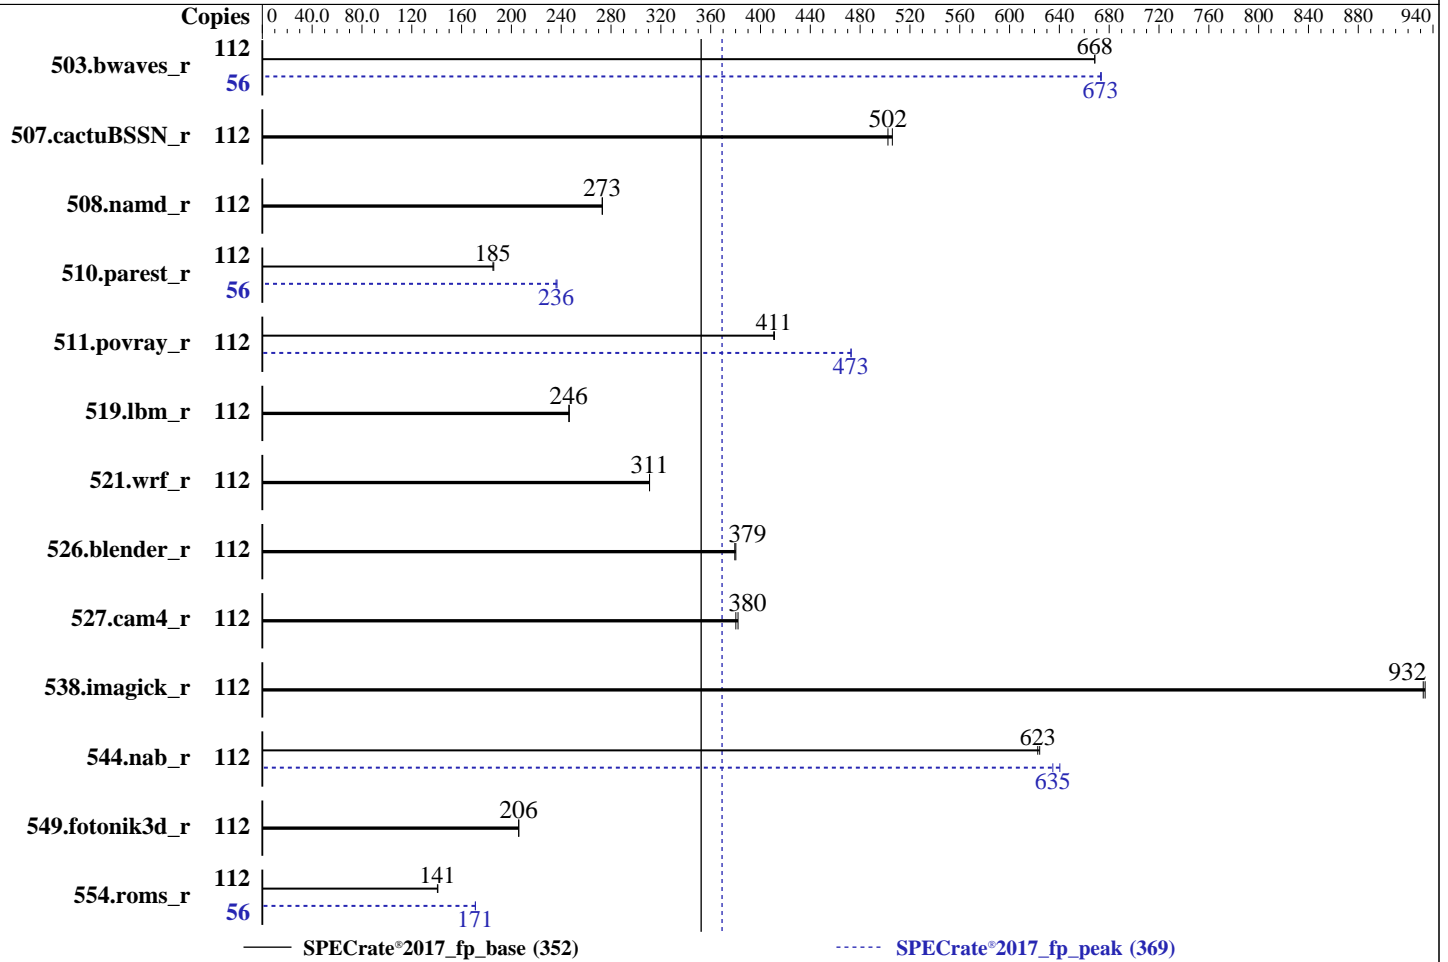

### Hardware

CPU Name: Intel Xeon Gold 6330  
 Max MHz: 3100  
 Nominal: 2000  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 42 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)  
 Storage: 225 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 4.18.0-240.15.1.el8\_3.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 1.1.2 released Apr-2021  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 jemalloc memory allocator V5.0.1  
 (Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Software (Continued)

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	<b>1680</b>	<b>668</b>	1680	668			56	834	674	<b>834</b>	<b>673</b>		
507.cactuBSSN_r	112	<b>282</b>	<b>502</b>	280	506			112	<b>282</b>	<b>502</b>	280	506		
508.namd_r	112	<b>390</b>	<b>273</b>	390	273			112	<b>390</b>	<b>273</b>	390	273		
510.parest_r	112	<b>1582</b>	<b>185</b>	1576	186			56	619	237	<b>621</b>	<b>236</b>		
511.povray_r	112	636	411	<b>637</b>	<b>411</b>			112	553	473	<b>553</b>	<b>473</b>		
519.lbm_r	112	<b>480</b>	<b>246</b>	479	247			112	<b>480</b>	<b>246</b>	479	247		
521.wrf_r	112	<b>807</b>	<b>311</b>	807	311			112	<b>807</b>	<b>311</b>	807	311		
526.blender_r	112	<b>450</b>	<b>379</b>	449	380			112	<b>450</b>	<b>379</b>	449	380		
527.cam4_r	112	513	382	<b>515</b>	<b>380</b>			112	513	382	<b>515</b>	<b>380</b>		
538.imagick_r	112	<b>299</b>	<b>932</b>	298	934			112	<b>299</b>	<b>932</b>	298	934		
544.nab_r	112	302	624	<b>303</b>	<b>623</b>			112	294	640	<b>297</b>	<b>635</b>		
549.fotonik3d_r	112	<b>2121</b>	<b>206</b>	2119	206			112	<b>2121</b>	<b>206</b>	2119	206		
554.roms_r	112	1263	141	<b>1266</b>	<b>141</b>			56	520	171	<b>520</b>	<b>171</b>		

SPECrate®2017\_fp\_base = 352

SPECrate®2017\_fp\_peak = 369

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.5-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.5-ic2021.1/je5.0.1-64"

MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
 memory using Red Hat Enterprise Linux 8.1  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:  
 Sub NUMA Cluster : 2-Way Clustering  
 Virtualization Technology : Disabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 C1E : Disabled  
 C States : Autonomous  
 Memory Patrol Scrub : Disabled  
 Energy Efficiency Policy : Performance  
 CPU Interconnect Bus Link  
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.5-ic2021.1/bin/sysinfo  
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
 running on localhost.localdomain Tue May 11 16:45:39 2021

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
  2 "physical id"s (chips)
  112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings  : 56
  physical 0: cores 0 1 2 3 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
  physical 1: cores 0 1 2 3 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
Stepping:               6
CPU MHz:                2167.094
BogoMIPS:               4000.00
Virtualization:        VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:               1280K
L3 cache:               43008K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108
NUMA node1 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110
NUMA node2 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109
NUMA node3 CPU(s):     3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma  
clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1  
xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect wbnoinvd  
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid md\_clear pconfig flush\_l1d  
arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 43008 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96
100 104 108
node 0 size: 125452 MB
node 0 free: 113349 MB
node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98
102 106 110
node 1 size: 126769 MB
node 1 free: 128240 MB
node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97
101 105 109
node 2 size: 125919 MB
node 2 free: 127613 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99
103 107 111
node 3 size: 126117 MB
node 3 free: 128077 MB
node distances:
node 0 1 2 3
0: 10 11 20 20
1: 11 10 20 20
2: 20 20 10 11
3: 20 20 11 10
```

```
From /proc/meminfo
MemTotal: 527797592 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

```

VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"

```

```

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-240.15.1.el8_3.x86_64 #1 SMP Wed Feb 3 03:12:15 EST
2021 x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swappgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 May 11 11:04

```

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.5-ic2021.1
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs            tmpfs     225G  6.9G  219G   4% /mnt/ramdisk

```

```

From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R650
Product Family: PowerEdge
Serial:          1234567

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

7x 00AD00B300AD HMAA4GR7AJR8N-XN 32 GB 2 rank 3200, configured at 2933

9x 00AD063200AD HMAA4GR7AJR8N-XN 32 GB 2 rank 3200, configured at 2933

16x Not Specified Not Specified

BIOS:

BIOS Vendor: Dell Inc.

BIOS Version: 1.1.2

BIOS Date: 04/09/2021

BIOS Revision: 1.1

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

```

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

```

=====
C++, C   | 511.povray_r(peak)

```

```

-----
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

```

=====
C++, C   | 511.povray_r(base) 526.blender_r(base, peak)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

| 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Base Portability Flags (Continued)

```

510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### C++ benchmarks:

```

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both C and C++:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icx
```

Benchmarks using both C and C++:

```
511.povray_r: icpc icc
```

```
526.blender_r: icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifort
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto  
-Ofast -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 352

PowerEdge R650 (Intel Xeon Gold 6330, 2.00 GHz)

SPECrate®2017\_fp\_peak = 369

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-05-11 17:45:38-0400.

Report generated on 2021-06-08 19:59:26 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.