



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL365 Gen10 Plus  
(3.70 GHz, AMD EPYC 72F3)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 136

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2021  
Hardware Availability: Jun-2021  
Software Availability: Mar-2021

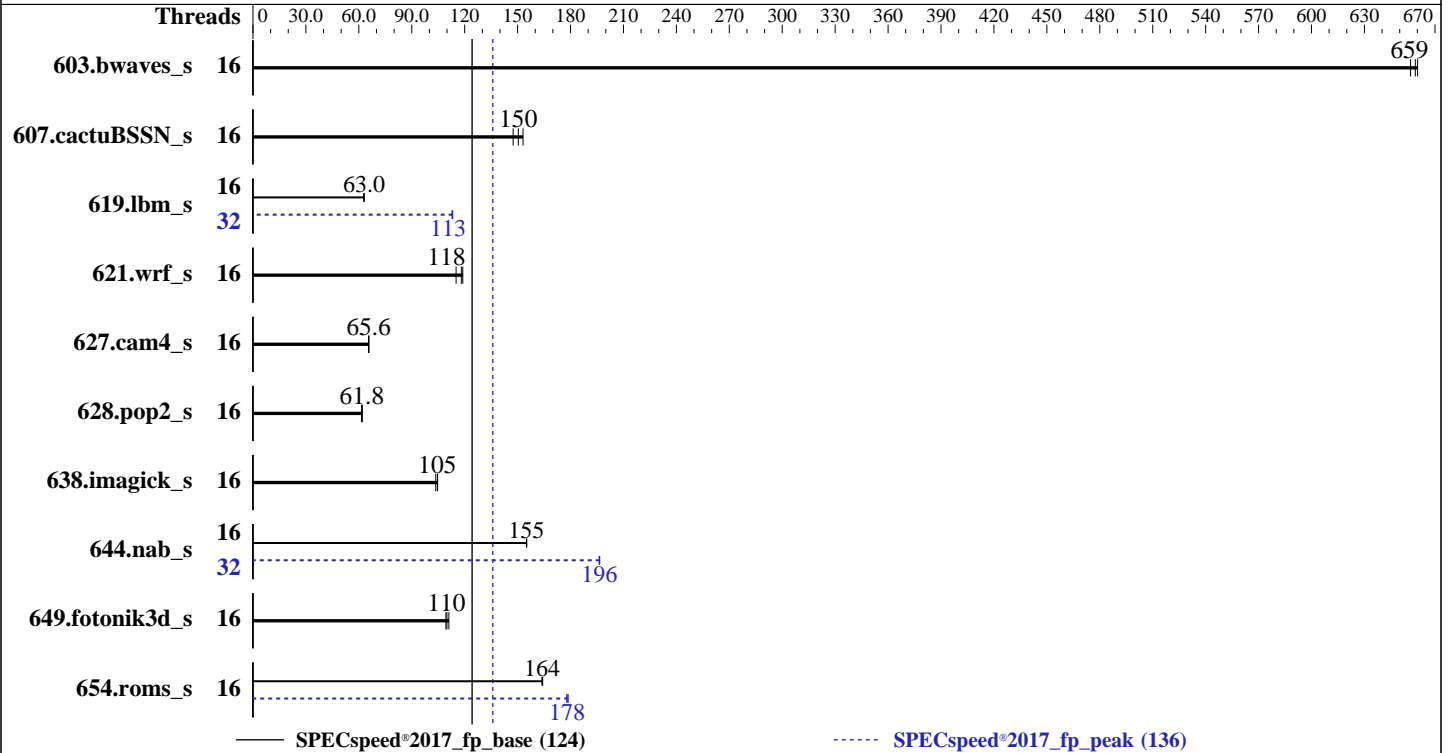

### Hardware

CPU Name: AMD EPYC 72F3  
 Max MHz: 4100  
 Nominal: 3700  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB per core  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 1 x 196 GB SATA SSD, RAID 0  
 Other: None

### Software

OS: Ubuntu 20.04.1 LTS (x86\_64)  
 Kernel 5.4.0-56-generic  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version A42 v2.42 04/29/2021 released Apr-2021  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus  
(3.70 GHz, AMD EPYC 72F3)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 136

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2021  
Hardware Availability: Jun-2021  
Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	89.9	656	89.4	660	<b>89.5</b>	<b>659</b>	16	89.9	656	89.4	660	<b>89.5</b>	<b>659</b>
607.cactuBSSN_s	16	<b>111</b>	<b>150</b>	113	147	109	153	16	<b>111</b>	<b>150</b>	113	147	109	153
619.lbm_s	16	83.1	63.0	<b>83.1</b>	<b>63.0</b>	83.4	62.8	32	<b>46.3</b>	<b>113</b>	46.4	113	46.3	113
621.wrf_s	16	<b>112</b>	<b>118</b>	115	115	111	119	16	<b>112</b>	<b>118</b>	115	115	111	119
627.cam4_s	16	135	65.7	<b>135</b>	<b>65.6</b>	135	65.5	16	135	65.7	<b>135</b>	<b>65.6</b>	135	65.5
628.pop2_s	16	192	62.0	193	61.5	<b>192</b>	<b>61.8</b>	16	192	62.0	193	61.5	<b>192</b>	<b>61.8</b>
638.imagick_s	16	<b>138</b>	<b>105</b>	139	104	138	105	16	<b>138</b>	<b>105</b>	139	104	138	105
644.nab_s	16	113	155	113	155	<b>113</b>	<b>155</b>	32	88.9	197	<b>89.0</b>	<b>196</b>	89.0	196
649.fotonik3d_s	16	83.4	109	<b>82.9</b>	<b>110</b>	82.1	111	16	83.4	109	<b>82.9</b>	<b>110</b>	82.1	111
654.roms_s	16	96.1	164	<b>96.1</b>	<b>164</b>	95.9	164	16	88.5	178	88.1	179	<b>88.5</b>	<b>178</b>

SPECspeed®2017\_fp\_base = **124**

SPECspeed®2017\_fp\_peak = **136**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
'echo 8 > /proc/sys/vm/dirty\_ratio' run as root to limit dirty cache to 8% of memory.  
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.  
'echo 1 > /proc/sys/vm/zone\_reclaim\_mode' run as root to free node-local memory and avoid remote memory usage.  
'sync; echo 3 > /proc/sys/vm/drop\_caches' run as root to reset filesystem caches.  
'sysctl -w kernel.randomize\_va\_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 136**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To enable THP only on request for peak runs of 628.pop2\_s, and 638.imagick\_s,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To disable THP for peak runs of 627.cam4\_s, 644.nab\_s, 649.fotonik3d\_s, and 654.roms\_s,  
'echo never > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-31"  
LD\_LIBRARY\_PATH =  
"/home/SPEC\_CPU2017/amd\_speed\_aocc300\_milan\_B\_lib/64;/home/SPEC\_CPU2017/  
amd\_speed\_aocc300\_milan\_B\_lib/32:"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "32"

Environment variables set by runcpu during the 619.lbm\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 16 1 17 2 18 3 19 4 20 5 21 6 22 7 23 8 24 9 25 10 26  
11 27 12 28 13 29 14 30 15 31"

Environment variables set by runcpu during the 644.nab\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 16 1 17 2 18 3 19 4 20 5 21 6 22 7 23 8 24 9 25 10 26  
11 27 12 28 13 29 14 30 15 31"

Environment variables set by runcpu during the 654.roms\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-15"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 136**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## General Notes (Continued)

jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Submitted\_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>  
Submitted: Mon Jun 7 11:50:18 EDT 2021  
Submission: cpu2017-20210607-26878.sub

## Platform Notes

BIOS Configuration  
Workload Profile set to General Peak Frequency Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
NUMA memory domains per socket set to One memory domain per socket  
Thermal Configuration set to Maximum Cooling  
Infinity Fabric Power Management set to Disabled  
Infinity Fabric Performance State set to P0  
Workload Profile set to Custom  
Power Regulator set to OS Control Mode

Sysinfo program /home/SPEC\_CPU2017/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on admin Wed Apr 1 17:26:48 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 72F3 8-Core Processor  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 48 bits physical, 48 bits virtual

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

```

CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 72F3 8-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 1792.709
CPU max MHz: 3700.0000
CPU min MHz: 1500.0000
BogoMIPS: 7386.23
Virtualization: AMD-V
L1d cache: 512 KiB
L1i cache: 512 KiB
L2 cache: 8 MiB
L3 cache: 512 MiB
NUMA node0 CPU(s): 0,16
NUMA node1 CPU(s): 1,17
NUMA node2 CPU(s): 2,18
NUMA node3 CPU(s): 3,19
NUMA node4 CPU(s): 4,20
NUMA node5 CPU(s): 5,21
NUMA node6 CPU(s): 6,22
NUMA node7 CPU(s): 7,23
NUMA node8 CPU(s): 8,24
NUMA node9 CPU(s): 9,25
NUMA node10 CPU(s): 10,26
NUMA node11 CPU(s): 11,27
NUMA node12 CPU(s): 12,28
NUMA node13 CPU(s): 13,29
NUMA node14 CPU(s): 14,30
NUMA node15 CPU(s): 15,31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 136**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

```

Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
xsave avx fl6c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 16
node 0 size: 128776 MB
node 0 free: 128680 MB
node 1 cpus: 1 17
node 1 size: 129023 MB
node 1 free: 128960 MB
node 2 cpus: 2 18
node 2 size: 129023 MB
node 2 free: 128954 MB
node 3 cpus: 3 19
node 3 size: 128999 MB
node 3 free: 128936 MB
node 4 cpus: 4 20
node 4 size: 129023 MB
node 4 free: 128956 MB
node 5 cpus: 5 21
node 5 size: 129023 MB
node 5 free: 128954 MB
node 6 cpus: 6 22
node 6 size: 129023 MB
node 6 free: 128945 MB
node 7 cpus: 7 23
node 7 size: 116910 MB
node 7 free: 116840 MB
node 8 cpus: 8 24
node 8 size: 129023 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 136**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

```

node 8 free: 128942 MB
node 9 cpus: 9 25
node 9 size: 129023 MB
node 9 free: 128952 MB
node 10 cpus: 10 26
node 10 size: 129023 MB
node 10 free: 128927 MB
node 11 cpus: 11 27
node 11 size: 129023 MB
node 11 free: 128935 MB
node 12 cpus: 12 28
node 12 size: 129023 MB
node 12 free: 128939 MB
node 13 cpus: 13 29
node 13 size: 129023 MB
node 13 free: 128893 MB
node 14 cpus: 14 30
node 14 size: 129023 MB
node 14 free: 128921 MB
node 15 cpus: 15 31
node 15 size: 129019 MB
node 15 free: 128892 MB

```

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
1:	11	10	11	11	11	11	11	11	32	32	32	32	32	32	32	32
2:	11	11	10	11	11	11	11	11	32	32	32	32	32	32	32	32
3:	11	11	11	10	11	11	11	11	32	32	32	32	32	32	32	32
4:	11	11	11	11	10	11	11	11	32	32	32	32	32	32	32	32
5:	11	11	11	11	11	10	11	11	32	32	32	32	32	32	32	32
6:	11	11	11	11	11	11	10	11	32	32	32	32	32	32	32	32
7:	11	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	11	11	11	11	11	11
9:	32	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11
10:	32	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11
11:	32	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11
12:	32	32	32	32	32	32	32	32	11	11	11	11	10	11	11	11
13:	32	32	32	32	32	32	32	32	11	11	11	11	11	10	11	11
14:	32	32	32	32	32	32	32	32	11	11	11	11	11	11	10	11
15:	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10

```

From /proc/meminfo
MemTotal:      2101232948 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 136**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

Current active profile: balanced

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.1 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.1 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux admin 5.4.0-56-generic #62-Ubuntu SMP Mon Nov 23 19:20:19 UTC 2020 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 5 Apr 1 17:24
```

```
SPEC is set to: /home/SPEC_CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/ubunt...vg-ubuntu--lv ext4  196G   43G  144G  23% /
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 136**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL365 Gen10 Plus
Product Family: ProLiant
Serial:          CN70430NKR
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M386AAG40AM3-CWE 128 GB 4 rank 3200  
16x UNKNOWN NOT AVAILABLE

BIOS:  
BIOS Vendor: HPE  
BIOS Version: A42  
BIOS Date: 04/29/2021  
BIOS Revision: 2.42  
Firmware Revision: 2.42

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)  
  | 644.nab_s(base, peak)  
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----
```

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base, peak)  
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus  
(3.70 GHz, AMD EPYC 72F3)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

```

LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
-----

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
-----

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus  
(3.70 GHz, AMD EPYC 72F3)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-DSPEC\_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang -lflangrti

Fortran benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3  
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive  
-mllvm -fuse-tile-inner-loop -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 136**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Base Other Flags

C benchmarks:

`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:

`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:

`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:

`-Wno-unused-command-line-argument -Wno-return-type`

## Peak Compiler Invocation

C benchmarks:

`clang`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`619.lbm_s: -m64 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=5 -mllvm -unroll-threshold=50`

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus**  
(3.70 GHz, AMD EPYC 72F3)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Peak Optimization Flags (Continued)

619.lbm\_s (continued):

```
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick\_s: basepeak = yes

```
644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus  
(3.70 GHz, AMD EPYC 72F3)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 136

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revQ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revQ.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-01 13:26:48-0400.

Report generated on 2021-06-22 17:03:07 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-22.