



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

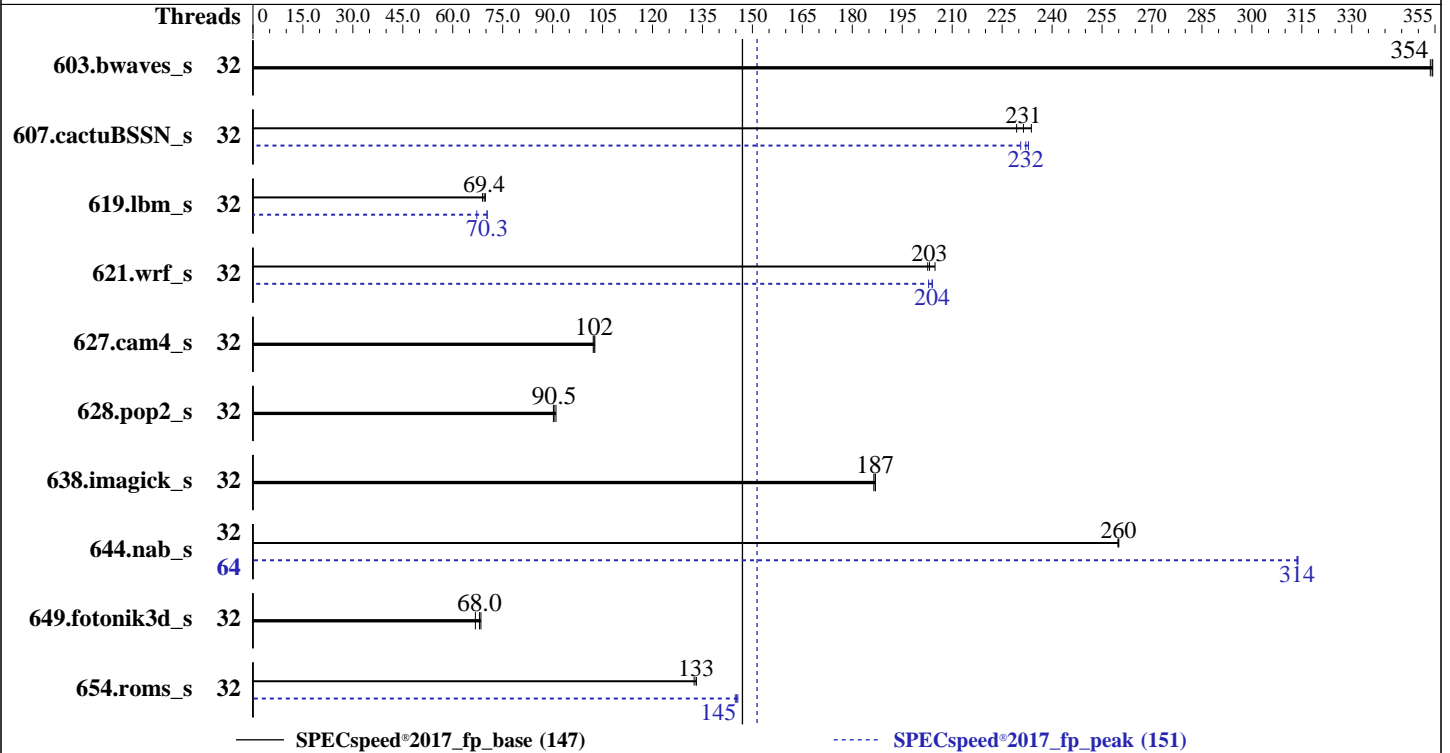

### Hardware

CPU Name: AMD EPYC 7513  
 Max MHz: 3650  
 Nominal: 2600  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 240 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64)  
 Kernel 5.3.18-22-default  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 0401 released Apr-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECSpeed®2017\_fp\_base = 147

SPECSpeed®2017\_fp\_peak = 151

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	<b>167</b>	<b>354</b>	167	354	167	354	32	<b>167</b>	<b>354</b>	167	354	167	354
607.cactuBSSN_s	32	<b>72.0</b>	<b>231</b>	71.3	234	72.7	229	32	72.3	231	<b>71.8</b>	<b>232</b>	71.6	233
619.lbm_s	32	76.0	68.9	75.0	69.8	<b>75.4</b>	<b>69.4</b>	32	<b>74.5</b>	<b>70.3</b>	77.9	67.2	74.5	70.3
621.wrf_s	32	64.6	205	65.3	203	<b>65.1</b>	<b>203</b>	32	65.2	203	64.8	204	<b>64.8</b>	<b>204</b>
627.cam4_s	32	86.3	103	86.7	102	<b>86.5</b>	<b>102</b>	32	86.3	103	86.7	102	<b>86.5</b>	<b>102</b>
628.pop2_s	32	<b>131</b>	<b>90.5</b>	130	91.0	132	90.2	32	<b>131</b>	<b>90.5</b>	130	91.0	132	90.2
638.imagick_s	32	77.4	186	77.2	187	<b>77.2</b>	<b>187</b>	32	77.4	186	77.2	187	<b>77.2</b>	<b>187</b>
644.nab_s	32	67.3	260	<b>67.2</b>	<b>260</b>	67.2	260	64	55.7	314	55.7	314	<b>55.7</b>	<b>314</b>
649.fotonik3d_s	32	133	68.5	<b>134</b>	<b>68.0</b>	136	66.8	32	133	68.5	<b>134</b>	<b>68.0</b>	136	66.8
654.roms_s	32	<b>118</b>	<b>133</b>	118	133	119	132	32	<b>108</b>	<b>145</b>	109	145	108	146

SPECSpeed®2017\_fp\_base = **147**

SPECSpeed®2017\_fp\_peak = **151**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

### Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

### Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
"/cpull8/amd_speed_aocc300_milan_B_lib/64:/cpull8/amd_speed_aocc300_mila
n_B_lib/32:"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42
11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54
23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-31"
```

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2021

**Hardware Availability:** May-2021

**Software Availability:** Mar-2021

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

BIOS Configuration:

DLWM Support = Disabled

SVM Mode = Disabled

NUMA nodes per socket = NPS2

APBDIS = 1

Fix SOC P-state = P0

Engine Boost = Enabled

IOMMU = Disabled

sysinfo program /cpull8/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost Fri Jul 16 10:51:16 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7513 32-Core Processor

1 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31

From lscpu from util-linux 2.33.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 48 bits physical, 48 bits virtual

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECSpeed®2017\_fp\_base = 147

SPECSpeed®2017\_fp\_peak = 151

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

```

Core(s) per socket: 32
Socket(s): 1
NUMA node(s): 2
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7513 32-Core Processor
Stepping: 1
CPU MHz: 1795.454
CPU max MHz: 2600.0000
CPU min MHz: 1500.0000
BogoMIPS: 5190.43
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-15,32-47
NUMA node1 CPU(s): 16-31,48-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47

node 0 size: 257819 MB

node 0 free: 257376 MB

node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63

node 1 size: 258026 MB

node 1 free: 257369 MB

node distances:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

```
node    0    1
0:     10   12
1:     12   10
```

From /proc/meminfo

```
MemTotal:      528226076 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

run-level 3 Jul 15 11:56

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

SPEC is set to: /cpull8

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xf	199G	26G	174G	13%	/

From /sys/devices/virtual/dmi/id

```
Vendor:      ASUSTeK COMPUTER INC.
Product:    RS520A-E11-RS24U
Product Family: Server
Serial:     333366669999
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200
8x Unknown Unknown
```

BIOS:

```
BIOS Vendor:    American Megatrends Inc.
BIOS Version:   0401
BIOS Date:      04/14/2021
BIOS Revision: 4.1
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)  
  | 644.nab_s(base, peak)  
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----
```

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base, peak)  
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2021

**Hardware Availability:** May-2021

**Software Availability:** Mar-2021

### Compiler Version Notes (Continued)

```

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

-----
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
-----

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

-----
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
-----

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

### Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2021

**Hardware Availability:** May-2021

**Software Availability:** Mar-2021

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fltto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2021

**Hardware Availability:** May-2021

**Software Availability:** Mar-2021

## Base Other Flags

C benchmarks:

`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:

`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:

`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:

`-Wno-unused-command-line-argument -Wno-return-type`

## Peak Compiler Invocation

C benchmarks:

`clang`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`619.lbm_s: -m64 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=5 -mllvm -unroll-threshold=50`

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECSpeed®2017\_fp\_base = 147

SPECSpeed®2017\_fp\_peak = 151

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

619.lbm\_s (continued):

```
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick\_s: basepeak = yes

```
644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2021

**Hardware Availability:** May-2021

**Software Availability:** Mar-2021

## Peak Optimization Flags (Continued)

621.wrf\_s (continued):

```
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -O3
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E11(KMPA-U16) Server System  
2.60 GHz, AMD EPYC 7513

SPECspeed®2017\_fp\_base = 147

SPECspeed®2017\_fp\_peak = 151

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2021

**Hardware Availability:** May-2021

**Software Availability:** Mar-2021

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.3.2021-07-06.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.3.2021-07-06.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-15 22:51:15-0400.

Report generated on 2021-09-01 14:19:57 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-31.