



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

### Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Dec-2020

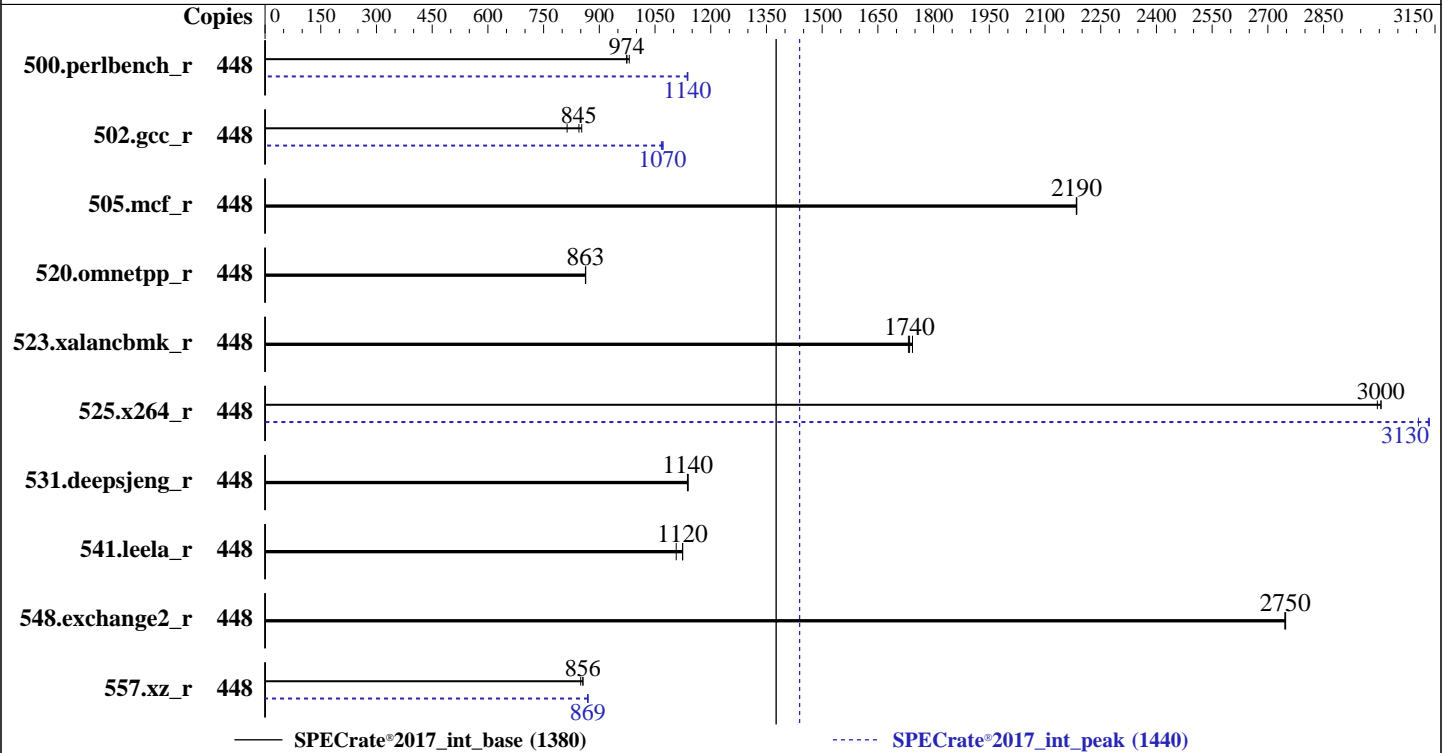

### Hardware

CPU Name: Intel Xeon Platinum 8280  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 224 cores, 8 chips, 2 threads/core  
 Orderable: 2,4,6,8 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 1.6 TB NVME SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 4.5.07 released Jul-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	448	<b><u>732</u></b>	<b><u>974</u></b>	727	981	733	974	448	627	1140	627	1140	<b><u>627</u></b>	<b><u>1140</u></b>
502.gcc_r	448	780	813	<b><u>751</u></b>	<b><u>845</u></b>	744	853	448	594	1070	592	1070	<b><u>593</u></b>	<b><u>1070</u></b>
505.mcf_r	448	<b><u>331</u></b>	<b><u>2190</u></b>	331	2190	331	2180	448	<b><u>331</u></b>	<b><u>2190</u></b>	331	2190	331	2180
520.omnetpp_r	448	681	863	681	863	<b><u>681</u></b>	<b><u>863</u></b>	448	681	863	681	863	<b><u>681</u></b>	<b><u>863</u></b>
523.xalancbmk_r	448	271	1740	273	1730	<b><u>273</u></b>	<b><u>1740</u></b>	448	271	1740	273	1730	<b><u>273</u></b>	<b><u>1740</u></b>
525.x264_r	448	262	2990	<b><u>261</u></b>	<b><u>3000</u></b>	261	3000	448	253	3110	<b><u>250</u></b>	<b><u>3130</u></b>	250	3130
531.deepsjeng_r	448	451	1140	451	1140	<b><u>451</u></b>	<b><u>1140</u></b>	448	451	1140	451	1140	<b><u>451</u></b>	<b><u>1140</u></b>
541.leela_r	448	670	1110	660	1120	<b><u>660</u></b>	<b><u>1120</u></b>	448	670	1110	660	1120	<b><u>660</u></b>	<b><u>1120</u></b>
548.exchange2_r	448	<b><u>427</u></b>	<b><u>2750</u></b>	427	2750	427	2750	448	<b><u>427</u></b>	<b><u>2750</u></b>	427	2750	427	2750
557.xz_r	448	569	850	<b><u>566</u></b>	<b><u>856</u></b>	565	856	448	557	868	556	869	<b><u>556</u></b>	<b><u>869</u></b>

SPECrate®2017\_int\_base = **1380**

SPECrate®2017\_int\_peak = **1440**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
SCALING\_GOVERNOR set to Performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Aug-2021

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2020

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5,  
and the system compiler gcc 4.8.5;  
sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to Enable

IMC (Integrated memory controller) Interleaving set to 1-way

Intel Hyper Threading Technology set to Enable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Thu Aug 26 17:40:35 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz

8 "physical id"s (chips)

448 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

### Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Aug-2021  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

```

From lscpu from util-linux 2.32.1:

```

Architecture:      x86_64
CPU op-mode(s):   32-bit, 64-bit
Byte Order:       Little Endian
CPU(s):           448
On-line CPU(s) list: 0-447
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s):        8
NUMA node(s):     16
Vendor ID:        GenuineIntel
CPU family:       6
Model:            85
Model name:       Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:         7
CPU MHz:          3515.033
CPU max MHz:      4000.0000
CPU min MHz:      1000.0000
BogoMIPS:         5400.00
Virtualization:   VT-x
L1d cache:        32K
L1i cache:        32K
L2 cache:         1024K
L3 cache:         39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,224-227,231-233,238-241,245-247
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,228-230,234-237,242-244,248-251
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,252-255,259-261,266-269,273-275
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,256-258,262-265,270-272,276-279
NUMA node4 CPU(s): 56-59,63-65,70-73,77-79,280-283,287-289,294-297,301-303
NUMA node5 CPU(s): 60-62,66-69,74-76,80-83,284-286,290-293,298-300,304-307
NUMA node6 CPU(s): 84-87,91-93,98-101,105-107,308-311,315-317,322-325,329-331
NUMA node7 CPU(s): 88-90,94-97,102-104,108-111,312-314,318-321,326-328,332-335
NUMA node8 CPU(s): 112-115,119-121,126-129,133-135,336-339,343-345,350-353,357-359
NUMA node9 CPU(s): 116-118,122-125,130-132,136-139,340-342,346-349,354-356,360-363
NUMA node10 CPU(s): 140-143,147-149,154-157,161-163,364-367,371-373,378-381,385-387
NUMA node11 CPU(s): 144-146,150-153,158-160,164-167,368-370,374-377,382-384,388-391

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

### Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Platform Notes (Continued)

```

NUMA node12 CPU(s): 168-171,175-177,182-185,189-191,392-395,399-401,406-409,413-415
NUMA node13 CPU(s): 172-174,178-181,186-188,192-195,396-398,402-405,410-412,416-419
NUMA node14 CPU(s): 196-199,203-205,210-213,217-219,420-423,427-429,434-437,441-443
NUMA node15 CPU(s): 200-202,206-209,214-216,220-223,424-426,430-433,438-440,444-447
Flags:          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 224 225 226 227 231 232 233 238 239 240
241 245 246 247
node 0 size: 191590 MB
node 0 free: 191335 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 228 229 230 234 235 236 237 242 243
244 248 249 250 251
node 1 size: 193529 MB
node 1 free: 193330 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 252 253 254 255 259 260 261 266
267 268 269 273 274 275
node 2 size: 193529 MB
node 2 free: 193378 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 256 257 258 262 263 264 265 270
271 272 276 277 278 279
node 3 size: 193529 MB
node 3 free: 193200 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 280 281 282 283 287 288 289 294
295 296 297 301 302 303
node 4 size: 193529 MB
node 4 free: 193344 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 284 285 286 290 291 292 293 298
299 300 304 305 306 307
node 5 size: 193529 MB
node 5 free: 193213 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Aug-2021  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 308 309 310 311 315 316 317
322 323 324 325 329 330 331
node 6 size: 193529 MB
node 6 free: 193289 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 312 313 314 318 319 320
321 326 327 328 332 333 334 335
node 7 size: 193529 MB
node 7 free: 193229 MB
node 8 cpus: 112 113 114 115 119 120 121 126 127 128 129 133 134 135 336 337 338 339
343 344 345 350 351 352 353 357 358 359
node 8 size: 193529 MB
node 8 free: 193385 MB
node 9 cpus: 116 117 118 122 123 124 125 130 131 132 136 137 138 139 340 341 342 346
347 348 349 354 355 356 360 361 362 363
node 9 size: 193529 MB
node 9 free: 193394 MB
node 10 cpus: 140 141 142 143 147 148 149 154 155 156 157 161 162 163 364 365 366 367
371 372 373 378 379 380 381 385 386 387
node 10 size: 193529 MB
node 10 free: 193384 MB
node 11 cpus: 144 145 146 150 151 152 153 158 159 160 164 165 166 167 368 369 370 374
375 376 377 382 383 384 388 389 390 391
node 11 size: 193529 MB
node 11 free: 193363 MB
node 12 cpus: 168 169 170 171 175 176 177 182 183 184 185 189 190 191 392 393 394 395
399 400 401 406 407 408 409 413 414 415
node 12 size: 193529 MB
node 12 free: 193393 MB
node 13 cpus: 172 173 174 178 179 180 181 186 187 188 192 193 194 195 396 397 398 402
403 404 405 410 411 412 416 417 418 419
node 13 size: 193502 MB
node 13 free: 193357 MB
node 14 cpus: 196 197 198 199 203 204 205 210 211 212 213 217 218 219 420 421 422 423
427 428 429 434 435 436 437 441 442 443
node 14 size: 193529 MB
node 14 free: 193381 MB
node 15 cpus: 200 201 202 206 207 208 209 214 215 216 220 221 222 223 424 425 426 430
431 432 433 438 439 440 444 445 446 447
node 15 size: 193525 MB
node 15 free: 193375 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 11 21 21 31 31 21 21 31 31 21 21 31 31 31 31
  1: 11 10 21 21 31 31 21 21 31 31 21 21 31 31 31 31
  2: 21 21 10 11 21 21 31 31 21 21 31 31 31 31 31 31
  3: 21 21 11 10 21 21 31 31 21 21 31 31 31 31 31 31
  4: 31 31 21 21 10 11 21 21 31 31 31 31 21 21 31 31

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Dec-2020

### Platform Notes (Continued)

5:	31	31	21	21	11	10	21	21	31	31	31	31	21	21	31	31
6:	21	21	31	31	21	21	10	11	31	31	31	31	31	31	21	21
7:	21	21	31	31	21	21	11	10	31	31	31	31	31	31	21	21
8:	31	31	21	21	31	31	31	31	10	11	21	21	31	31	21	21
9:	31	31	21	21	31	31	31	31	11	10	21	21	31	31	21	21
10:	21	21	31	31	31	31	31	31	21	21	10	11	21	21	31	31
11:	21	21	31	31	31	31	31	31	21	21	11	10	21	21	31	31
12:	31	31	31	31	21	21	31	31	31	31	21	21	10	11	21	21
13:	31	31	31	31	21	21	31	31	31	31	21	21	11	10	21	21
14:	31	31	31	31	31	31	21	21	21	21	31	31	21	21	10	11
15:	31	31	31	31	31	31	21	21	21	21	31	31	21	21	11	10

From /proc/meminfo

MemTotal: 3168771572 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.2"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.2:ga

uname -a:

Linux localhost.localdomain 4.18.0-193.el8.x86\_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

KVM: Vulnerable

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Aug-2021  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Aug 26 17:15

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.0T	99G	926G	10%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:      Inspur
Product:     TS860M5
Product Family: TypelFamily
Serial:      219177631

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  96x Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933

```

```

BIOS:
  BIOS Vendor:      Inspur
  BIOS Version:     4.5.07
  BIOS Date:        07/19/2021
  BIOS Revision:    4.5

```

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C      | 500.perlbench_r(peak) 557.xz_r(peak)
-----

```

```

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Aug-2021

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2020

### Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Dec-2020

### Compiler Version Notes (Continued)

-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
C | 502.gcc\_r(peak)

-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

### Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

557.xz\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2)

-xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -fno-strict-overflow

-mbranches-within-32B-boundaries

-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64\_lin

-lqkmallo

502.gcc\_r: -m32

-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32\_lin

-std=gnu89 -w1, -z, muldefs -fprofile-generate(pass 1)

-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto

-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 1380

Inspur TS860M5 (Intel Xeon Platinum 8280)

SPECrate®2017\_int\_peak = 1440

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

502.gcc\_r (continued):

```
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto  
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-26 05:40:34-0400.

Report generated on 2021-09-14 19:18:56 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-14.