



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation


NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

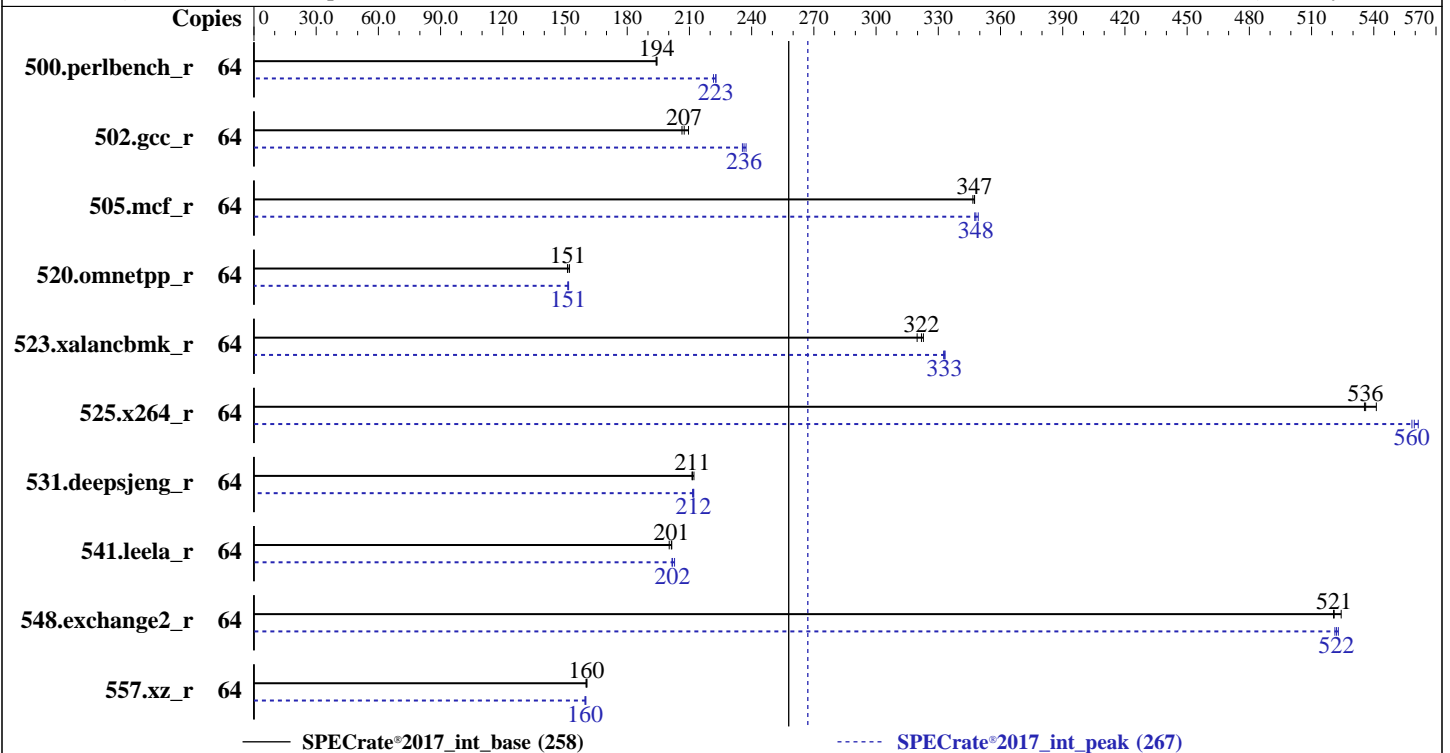

Hardware

CPU Name: Intel Xeon Gold 6244
 Max MHz: 4400
 Nominal: 3600
 Enabled: 32 cores, 4 chips, 2 threads/core
 Orderable: 2,3,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 800 GB tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)
 Kernel 3.10.0-957.10.1.el7.x86_64
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: NEC BIOS Version 5.7.0210 08/27/2019 released Oct-2019
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	64	525	194	524	194	524	194	64	457	223	457	223	460	222		
502.gcc_r	64	439	206	432	210	437	207	64	382	237	385	236	383	236		
505.mcf_r	64	298	348	298	347	298	347	64	296	349	297	348	298	348		
520.omnetpp_r	64	552	152	555	151	555	151	64	555	151	553	152	554	151		
523.xalancbmk_r	64	211	320	210	322	209	323	64	203	333	203	333	203	333		
525.x264_r	64	209	535	209	536	207	541	64	200	560	201	558	200	561		
531.deepsjeng_r	64	347	211	346	212	347	211	64	346	212	346	212	347	212		
541.leela_r	64	527	201	529	200	526	201	64	525	202	523	203	526	202		
548.exchange2_r	64	322	521	320	524	322	521	64	321	523	322	521	321	522		
557.xz_r	64	432	160	430	161	431	160	64	433	160	432	160	433	160		

SPECrate®2017_int_base = **258**

SPECrate®2017_int_peak = **267**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
cpupower -c all frequency-set -g performance
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Set Kernel Boot Parameter : nohz_full=1-31
irqbalance disabled with "service irqbalance stop"
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/SPEC/lib/intel64:/home/SPEC/lib/ia32:/home/SPEC/je5.0.1-32"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
Memory RAS Mode: SDDC mode
VT-x : Disabled
Processor C6 Report : Disabled
OS Performance Tuning : Disabled
Energy Performance : Performance
Patrol Scrub : Disabled
DCU Streamer Prefetcher : Disabled
Memory P.E. Retry : Disabled
Sub NUMA Clustering : Enabled
Turbo Boost : Enabled

Sysinfo program /home/SPEC/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Fri Aug 27 00:06:09 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 1 3 4 9 17 18 25 27
physical 1: cores 2 3 4 8 9 11 17 27
physical 2: cores 2 4 8 9 18 19 25 27
physical 3: cores 2 4 8 9 18 19 20 25
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
Stepping:               7
CPU MHz:                3601.000
CPU max MHz:           3601.0000
CPU min MHz:           1200.0000
BogoMIPS:               7200.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               25344K
NUMA node0 CPU(s):     0,3,4,6,32,35,36,38
NUMA node1 CPU(s):     1,2,5,7,33,34,37,39
NUMA node2 CPU(s):     8,11,12,14,40,43,44,46
NUMA node3 CPU(s):     9,10,13,15,41,42,45,47
NUMA node4 CPU(s):     16,18,19,22,48,50,51,54
NUMA node5 CPU(s):     17,20,21,23,49,52,53,55
NUMA node6 CPU(s):     24,26,27,31,56,58,59,63
NUMA node7 CPU(s):     25,28-30,57,60-62
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

```
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 3 4 6 32 35 36 38
node 0 size: 195209 MB
node 0 free: 190490 MB
node 1 cpus: 1 2 5 7 33 34 37 39
node 1 size: 196608 MB
node 1 free: 191017 MB
node 2 cpus: 8 11 12 14 40 43 44 46
node 2 size: 196608 MB
node 2 free: 192258 MB
node 3 cpus: 9 10 13 15 41 42 45 47
node 3 size: 196608 MB
node 3 free: 192029 MB
node 4 cpus: 16 18 19 22 48 50 51 54
node 4 size: 196608 MB
node 4 free: 192241 MB
node 5 cpus: 17 20 21 23 49 52 53 55
node 5 size: 196608 MB
node 5 free: 190585 MB
node 6 cpus: 24 26 27 31 56 58 59 63
node 6 size: 196608 MB
node 6 free: 192267 MB
node 7 cpus: 25 28 29 30 57 60 61 62
node 7 size: 196608 MB
node 7 free: 191118 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 11 15 15 15 15 15 15
 1:  11 10 15 15 15 15 15 15
 2:  15 15 10 11 15 15 15 15
 3:  15 15 11 10 15 15 15 15
 4:  15 15 15 15 10 11 15 15
 5:  15 15 15 15 11 10 15 15
 6:  15 15 15 15 15 15 10 11
 7:  15 15 15 15 15 15 11 10
```

From /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

MemTotal: 1583677824 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.6 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.6"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-957.10.1.el7.x86_64 #1 SMP Thu Feb 7 07:12:53 UTC
2019 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: No status reported
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

run-level 3 Aug 26 23:54

SPEC is set to: /home/SPEC

```
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs            tmpfs     800G  4.2G  796G   1% /home
```

From /sys/devices/virtual/dmi/id

```
BIOS: American Megatrends Inc. 5.7.0210 08/27/2019
Vendor: NEC
Product: NX7700x/A5012M-4 v2 [NE3400-401Y]
Serial: 7800115
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 523.xalanbmk_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C++      | 523.xalancbmk_r(peak)  
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
Fortran  | 548.exchange2_r(base, peak)  
-----
```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc  
  
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc  
  
505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -fno-alias
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemallocc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-CLX-A5012M-4-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-CLX-A5012M-4-RevC.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Gold 6244, 3.60GHz)

SPECrate®2017_int_base = 258

SPECrate®2017_int_peak = 267

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Aug-2021
Hardware Availability: Oct-2019
Software Availability: May-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2021-08-26 11:06:09-0400.
Report generated on 2021-09-29 12:26:04 by CPU2017 PDF formatter v6442.
Originally published on 2021-09-28.