



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

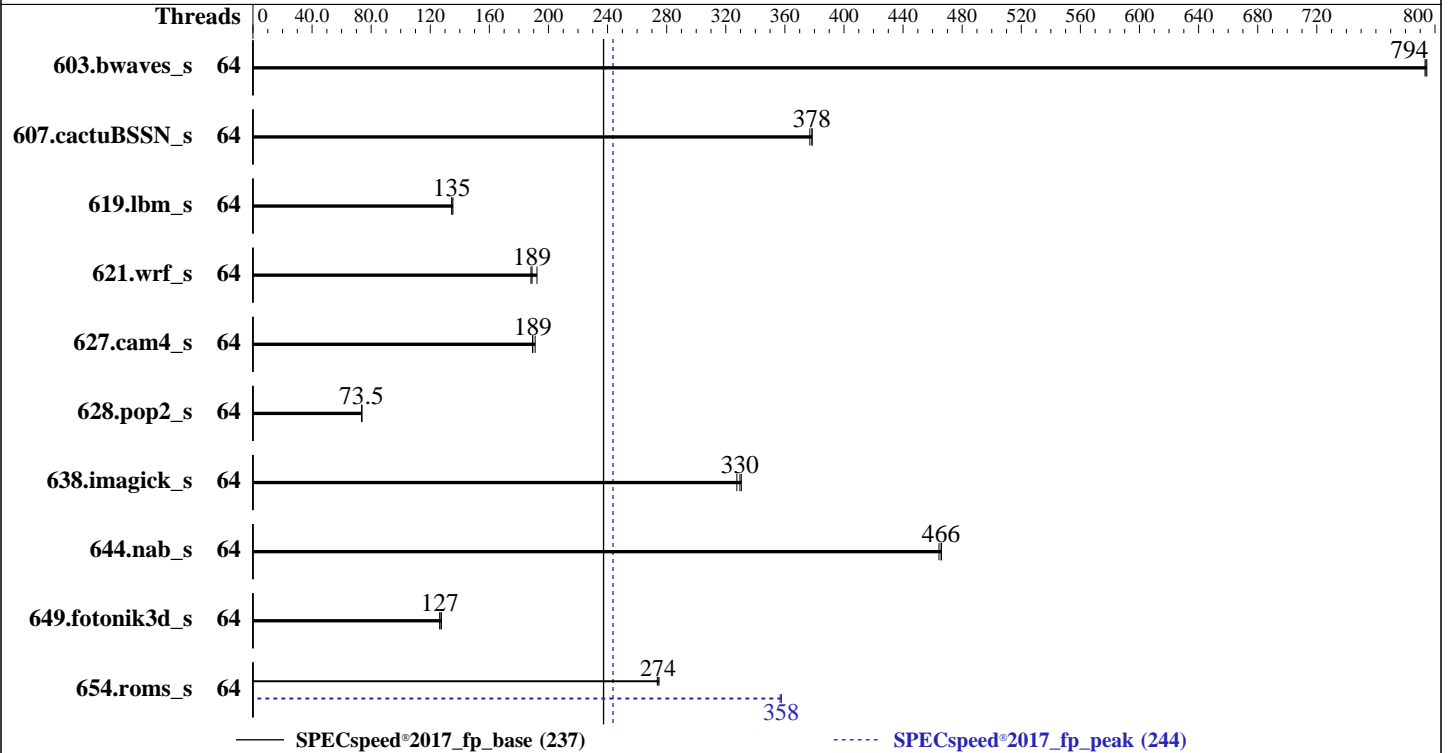

Hardware

CPU Name: AMD EPYC 75F3
 Max MHz: 4000
 Nominal: 2950
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 4 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200V-L)
 Storage: 1 x 1.6 TB NVMe SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP3 (x86_64)
 kernel version 5.3.18-57-default
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: Yes
 Firmware: Version C225M6.4.2.1c released Sep-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECSpeed®2017_fp_base = 237

SPECSpeed®2017_fp_peak = 244

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Sep-2021
Hardware Availability: Jun-2021
Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	74.3	794	74.3	794	74.4	793	64	74.3	794	74.3	794	74.4	793
607.cactuBSSN_s	64	44.1	378	44.2	377	44.0	378	64	44.1	378	44.2	377	44.0	378
619.lbm_s	64	38.9	135	38.9	135	38.7	135	64	38.9	135	38.9	135	38.7	135
621.wrf_s	64	70.3	188	68.8	192	70.0	189	64	70.3	188	68.8	192	70.0	189
627.cam4_s	64	46.8	189	46.8	189	46.4	191	64	46.8	189	46.8	189	46.4	191
628.pop2_s	64	162	73.5	161	73.8	162	73.5	64	162	73.5	161	73.8	162	73.5
638.imagick_s	64	44.0	328	43.8	330	43.6	331	64	44.0	328	43.8	330	43.6	331
644.nab_s	64	37.5	466	37.5	466	37.6	464	64	37.5	466	37.5	466	37.6	464
649.fotonik3d_s	64	72.0	127	71.5	128	72.1	126	64	72.0	127	71.5	128	72.1	126
654.roms_s	64	57.5	274	57.3	275	57.4	274	64	44.0	358	44.0	358	44.1	357

SPECSpeed®2017_fp_base = **237**

SPECSpeed®2017_fp_peak = **244**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Operating System Notes (Continued)

integer runs and all FP runs to enable Transparent Hugepages (THP).
'cpupowerÂ frequency-set -g performance' run as root to set the scaling governor to performance.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
"/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib32:"
MALLOCCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "16G"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-63"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

SMT Mode set to Disabled

NUMA nodes per socket set to NPS1

ACPI SRAT L3 Cache As NUMA Domain set to Enabled

DRAM Scrub Time set to Disabled

Determinism Slider set to Power

L1 Stream HW Prefetcher set to Enabled

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Sep-2021
Hardware Availability: Jun-2021
Software Availability: Jun-2021

Platform Notes (Continued)

APBDIS set to 1

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Sun Sep 26 00:12:10 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 75F3 32-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings  : 32
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
                25 26 27 28 29 30 31
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
                25 26 27 28 29 30 31
```

```
From lscpu from util-linux 2.36.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):         16
Vendor ID:              AuthenticAMD
CPU family:             25
Model:                  1
Model name:             AMD EPYC 75F3 32-Core Processor
Stepping:               1
Frequency boost:       enabled
CPU MHz:                3100.854
CPU max MHz:           2950.0000
CPU min MHz:           1500.0000
BogoMIPS:               5889.18
Virtualization:        AMD-V
L1d cache:              2 MiB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Platform Notes (Continued)

```

L1i cache:                2 MiB
L2 cache:                  32 MiB
L3 cache:                  512 MiB
NUMA node0 CPU(s):        0-3
NUMA node1 CPU(s):        4-7
NUMA node2 CPU(s):        8-11
NUMA node3 CPU(s):        12-15
NUMA node4 CPU(s):        16-19
NUMA node5 CPU(s):        20-23
NUMA node6 CPU(s):        24-27
NUMA node7 CPU(s):        28-31
NUMA node8 CPU(s):        32-35
NUMA node9 CPU(s):        36-39
NUMA node10 CPU(s):       40-43
NUMA node11 CPU(s):       44-47
NUMA node12 CPU(s):       48-51
NUMA node13 CPU(s):       52-55
NUMA node14 CPU(s):       56-59
NUMA node15 CPU(s):       60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected
Flags:                      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca fsrm

```

From lscpu --cache:

NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Platform Notes (Continued)

L1d	32K	2M	8 Data	1	64	1	64
L1i	32K	2M	8 Instruction	1	64	1	64
L2	512K	32M	8 Unified	2	1024	1	64
L3	32M	512M	16 Unified	3	32768	1	64

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware
```

```
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3
node 0 size: 128838 MB
node 0 free: 128578 MB
node 1 cpus: 4 5 6 7
node 1 size: 129022 MB
node 1 free: 128910 MB
node 2 cpus: 8 9 10 11
node 2 size: 129022 MB
node 2 free: 128945 MB
node 3 cpus: 12 13 14 15
node 3 size: 129022 MB
node 3 free: 128947 MB
node 4 cpus: 16 17 18 19
node 4 size: 129022 MB
node 4 free: 128938 MB
node 5 cpus: 20 21 22 23
node 5 size: 129022 MB
node 5 free: 128947 MB
node 6 cpus: 24 25 26 27
node 6 size: 129022 MB
node 6 free: 128942 MB
node 7 cpus: 28 29 30 31
node 7 size: 116909 MB
node 7 free: 116794 MB
node 8 cpus: 32 33 34 35
node 8 size: 129022 MB
node 8 free: 128883 MB
node 9 cpus: 36 37 38 39
node 9 size: 129022 MB
node 9 free: 128880 MB
node 10 cpus: 40 41 42 43
node 10 size: 129022 MB
node 10 free: 128948 MB
node 11 cpus: 44 45 46 47
node 11 size: 129022 MB
node 11 free: 128915 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Platform Notes (Continued)

```

node 12 cpus: 48 49 50 51
node 12 size: 128988 MB
node 12 free: 128911 MB
node 13 cpus: 52 53 54 55
node 13 size: 129022 MB
node 13 free: 128947 MB
node 14 cpus: 56 57 58 59
node 14 size: 129022 MB
node 14 free: 128951 MB
node 15 cpus: 60 61 62 63
node 15 size: 129017 MB
node 15 free: 128927 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32
 1:  11 10 11 11 11 11 11 11 32 32 32 32 32 32 32 32
 2:  11 11 10 11 11 11 11 11 32 32 32 32 32 32 32 32
 3:  11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32
 4:  11 11 11 11 10 11 11 11 32 32 32 32 32 32 32 32
 5:  11 11 11 11 11 10 11 11 32 32 32 32 32 32 32 32
 6:  11 11 11 11 11 11 10 11 32 32 32 32 32 32 32 32
 7:  11 11 11 11 11 11 11 10 32 32 32 32 32 32 32 32
 8:  32 32 32 32 32 32 32 32 32 10 11 11 11 11 11 11
 9:  32 32 32 32 32 32 32 32 32 11 10 11 11 11 11 11
10:  32 32 32 32 32 32 32 32 32 11 11 10 11 11 11 11
11:  32 32 32 32 32 32 32 32 32 11 11 11 10 11 11 11
12:  32 32 32 32 32 32 32 32 32 11 11 11 11 10 11 11
13:  32 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11
14:  32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10
15:  32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10

```

From /proc/meminfo

MemTotal: 2101275304 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="15-SP3"

VERSION_ID="15.3"

PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"

ID="sles"

ID_LIKE="suse"

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Sep-2021
Hardware Availability: Jun-2021
Software Availability: Jun-2021

Platform Notes (Continued)

```
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

```
uname -a:  
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64  
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Sep 25 16:12
```

```
SPEC is set to: /home/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/nvme0n1p3 xfs   1.5T  12G  1.5T   1% /
```

```
From /sys/devices/virtual/dmi/id  
Vendor:          Cisco Systems Inc  
Product:         UCSC-C225-M6N  
Serial:          WZP25230TMY
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:  
16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200
```

```
BIOS:  
BIOS Vendor:     Cisco Systems, Inc.  
BIOS Version:    C225M6.4.2.1c.0.0806211349  
BIOS Date:       08/06/2021
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Sep-2021
Hardware Availability: Jun-2021
Software Availability: Jun-2021

Platform Notes (Continued)

BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Compiler Version Notes (Continued)

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
=====

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)

```

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)

```

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

```

Fortran benchmarks:

```

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

```

Benchmarks using both Fortran and C:

```

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

`-lflang -lflangrti`

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:

`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:

`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:

`-Wno-unused-command-line-argument -Wno-return-type`

Peak Compiler Invocation

C benchmarks:

`clang`

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

```
654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 75F3 32-Core Processor)

SPECspeed®2017_fp_base = 237

SPECspeed®2017_fp_peak = 244

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-26 03:12:10-0400.

Report generated on 2021-10-25 17:06:57 by CPU2017 PDF formatter v6442.

Originally published on 2021-10-25.