



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134, 3.50GHz

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Nov-2018

Software Availability: Jun-2021

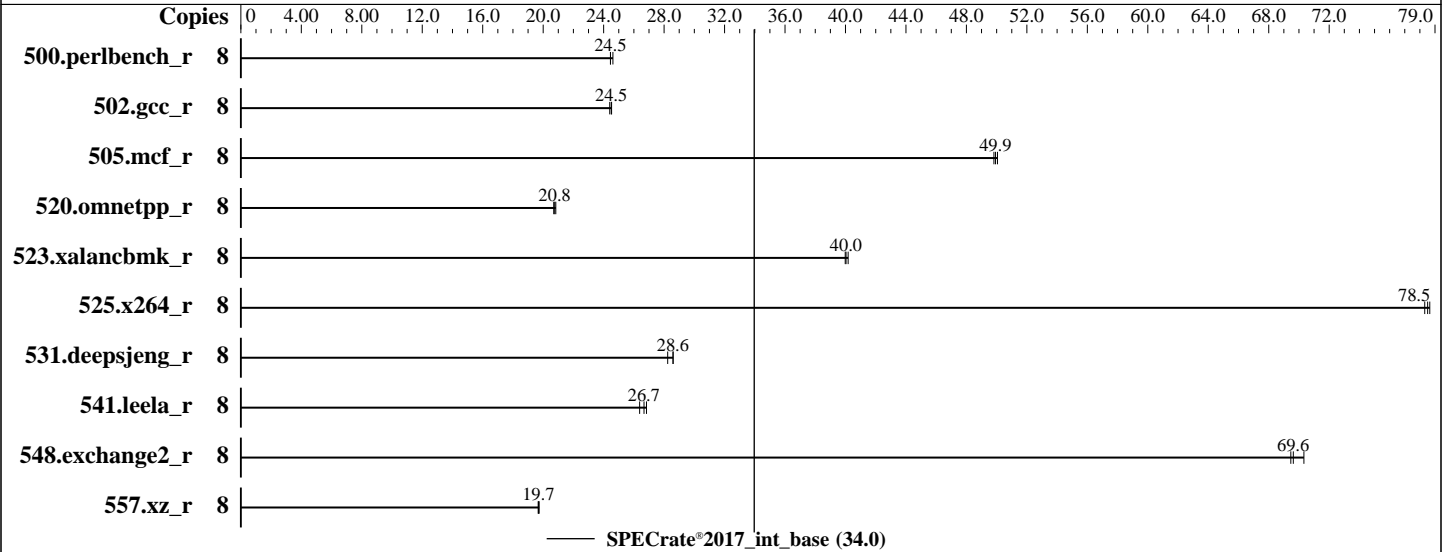

Hardware

CPU Name: Intel Xeon E-2134
 Max MHz: 4500
 Nominal: 3500
 Enabled: 4 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 8 MB I+D on chip per chip
 Other: None
 Memory: 128 GB (4 x 32 GB 2Rx8 PC4-2666V-E)
 Storage: 1 x SATA M.2 SSD, 480GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP3 5.3.18-57-default
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.13 R1.18.0 for D3673-A1x. Released Jul-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Nov-2018
Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	8	517	24.6	<u>521</u>	<u>24.5</u>	521	24.5							
502.gcc_r	8	462	24.5	<u>462</u>	<u>24.5</u>	464	24.4							
505.mcf_r	8	258	50.1	259	49.8	<u>259</u>	<u>49.9</u>							
520.omnetpp_r	8	507	20.7	<u>506</u>	<u>20.8</u>	504	20.8							
523.xalancbmk_r	8	211	40.0	210	40.2	<u>211</u>	<u>40.0</u>							
525.x264_r	8	178	78.7	<u>178</u>	<u>78.5</u>	179	78.3							
531.deepsjeng_r	8	321	28.6	325	28.2	<u>321</u>	<u>28.6</u>							
541.leela_r	8	502	26.4	494	26.8	<u>497</u>	<u>26.7</u>							
548.exchange2_r	8	302	69.5	<u>301</u>	<u>69.6</u>	298	70.3							
557.xz_r	8	<u>439</u>	<u>19.7</u>	439	19.7	438	19.7							

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/benchmark/speccpu/lib/intel64:/home/benchmark/speccpu/lib/ia32:/home/benchmark/speccpu/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Nov-2018
Software Availability: Jun-2021

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Hardware Prefetcher = Disabled
Adjacent Cache Line Prefetch = Disabled
VT-d = Disabled
Fan Control = Full
Race To Halt (RTH) = Disabled
DMI Link ASPM Control = L0s
REFRESH_2X_MODE = 2- Enabled HOT only

Sysinfo program /home/benchmark/speccpu/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Tue Dec 21 01:06:30 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2134 CPU @ 3.50GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3

From lscpu from util-linux 2.36.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 39 bits physical, 48 bits virtual
CPU(s): 8
On-line CPU(s) list: 0-7
Thread(s) per core: 2
Core(s) per socket: 4
Socket(s): 1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134, 3.50GHz

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Nov-2018
Software Availability: Jun-2021

Platform Notes (Continued)

```

NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 158
Model name: Intel(R) Xeon(R) E-2134 CPU @ 3.50GHz
Stepping: 10
CPU MHz: 4378.182
CPU max MHz: 4500.0000
CPU min MHz: 800.0000
BogoMIPS: 6999.82
Virtualization: VT-x
L1d cache: 128 KiB
L1i cache: 128 KiB
L2 cache: 1 MiB
L3 cache: 8 MiB
NUMA node0 CPU(s): 0-7
Vulnerability Itlb multihit: KVM: Mitigation: VMX disabled
Vulnerability L1tf: Mitigation; PTE Inversion; VMX conditional cache
flushes, SMT vulnerable
Vulnerability Mds: Mitigation; Clear CPU buffers; SMT vulnerable
Vulnerability Meltdown: Mitigation; PTI
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Full generic retpoline, IBPB
conditional, IBRS_FW, STIBP conditional, RSB filling
Vulnerability Srbds: Mitigation; Microcode
Vulnerability Tsx async abort: Mitigation; Clear CPU buffers; SMT vulnerable
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2
ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb invpcid_single pti ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx
smap clflushopt intel_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp
hwp_notify hwp_act_window hwp_epp md_clear flush_lld

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	128K	8	Data	1	64	1	64
L1i	32K	128K	8	Instruction	1	64	1	64
L2	256K	1M	4	Unified	2	1024	1	64
L3	8M	8M	16	Unified	3	8192	1	64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134, 3.50GHz

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Nov-2018
Software Availability: Jun-2021

Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 8192 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 128303 MB
node 0 free: 127817 MB
node distances:
node    0
0:    10
```

```
From /proc/meminfo
MemTotal:      131383072 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
powersave
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:15:sp3"
```

```
uname -a:
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021
(ba3c2e9/lp-5d9e8aa) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Mitigation: VMX disabled
CVE-2018-3620 (L1 Terminal Fault):	Mitigation: PTE Inversion; VMX: conditional cache flushes, SMT vulnerable
Microarchitectural Data Sampling:	Mitigation: Clear CPU buffers; SMT vulnerable
CVE-2017-5754 (Meltdown):	Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134, 3.50GHz

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Nov-2018
Software Availability: Jun-2021

Platform Notes (Continued)

```

CVE-2017-5753 (Spectre variant 1):          seccomp
                                             Mitigation: usercopy/swapgs
                                             barriers and __user pointer
                                             sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Full generic
                                             retpoline, IBPB: conditional,
                                             IBRS_FW, STIBP: conditional, RSB
                                             filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Mitigation: Microcode
CVE-2019-11135 (TSX Asynchronous Abort):    Mitigation: Clear CPU buffers; SMT
                                             vulnerable

```

run-level 3 Dec 21 01:04

```

SPEC is set to: /home/benchmark/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda8       xfs   121G   19G  103G  16% /home

```

```

From /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY TX1320 M4
Product Family: SERVER
Serial:          YMJKXXXXXXX

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  4x Samsung M391A4G43MB1-CTD 32 GB 2 rank 2667

```

```

BIOS:
  BIOS Vendor:    FUJITSU // American Megatrends Inc.
  BIOS Version:   V5.0.0.13 R1.18.0 for D3673-A1x
  BIOS Date:      07/12/2021
  BIOS Revision:  1.18

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Nov-2018
Software Availability: Jun-2021

Compiler Version Notes (Continued)

Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
| 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbenc_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECrate®2017_int_base = 34.0

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Nov-2018
Software Availability: Jun-2021

Base Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-20 11:06:29-0500.

Report generated on 2022-01-05 13:33:24 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-04.