



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 492

### Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

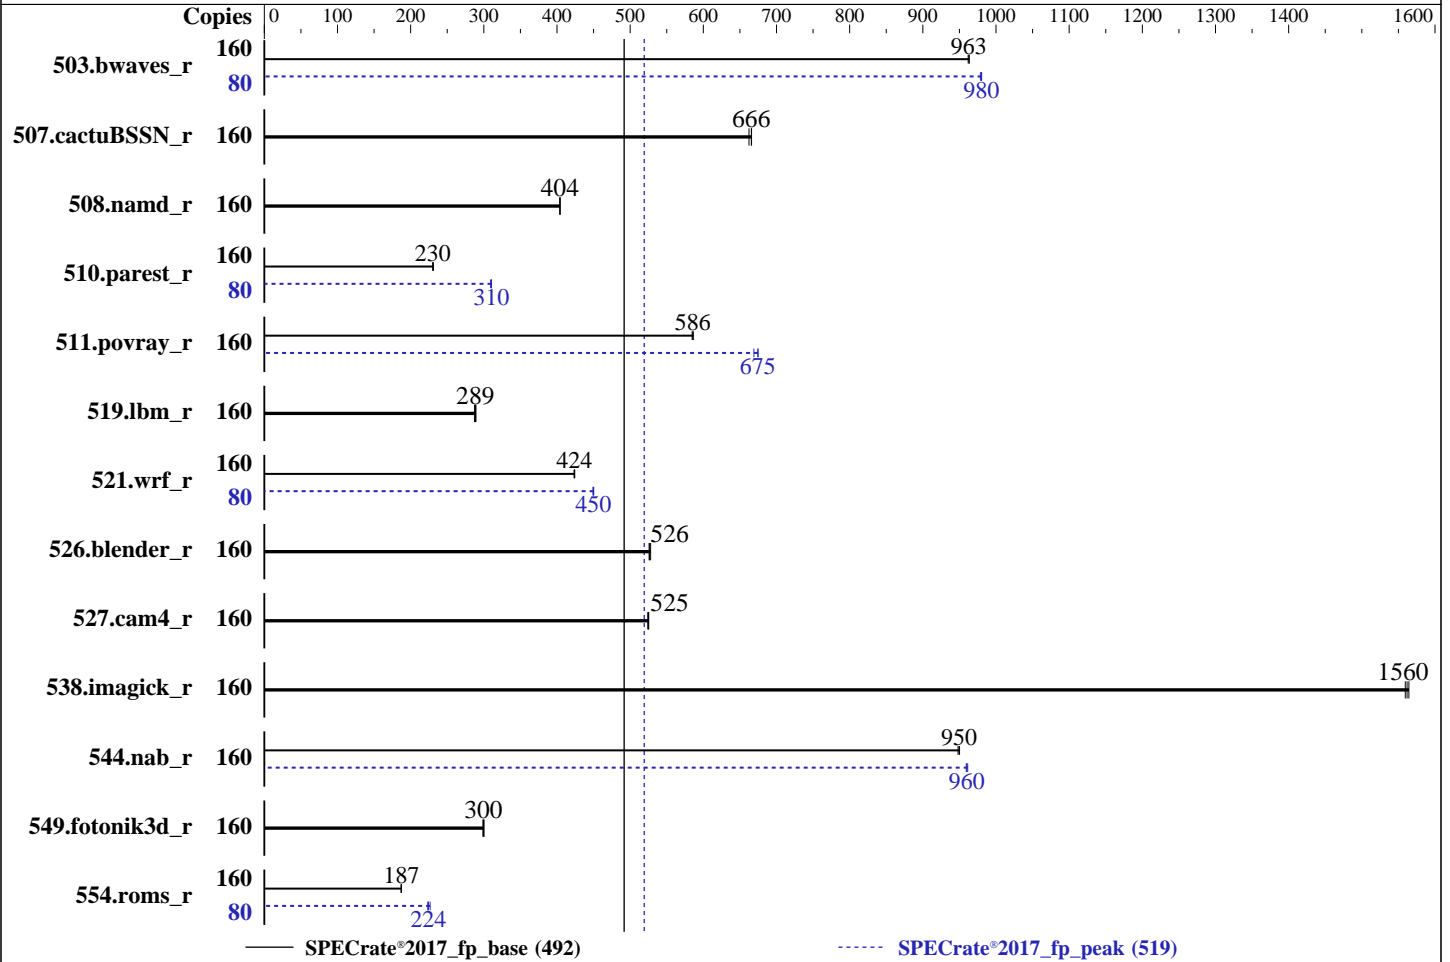

### Hardware

CPU Name: Intel Xeon Gold 5320H  
 Max MHz: 4200  
 Nominal: 2400  
 Enabled: 80 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200V-R, running at 2666)  
 Storage: 1 x 1.9 TB NVME SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 05.00.00 released Jun-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	<b>1666</b>	<b>963</b>	1668	962	1665	963	80	818	980	<b>818</b>	<b>980</b>	820	979
507.cactuBSSN_r	160	<b>304</b>	<b>666</b>	306	662	304	666	160	<b>304</b>	<b>666</b>	306	662	304	666
508.namd_r	160	376	404	376	404	<b>376</b>	<b>404</b>	160	376	404	376	404	<b>376</b>	<b>404</b>
510.parest_r	160	1812	231	1817	230	<b>1817</b>	<b>230</b>	80	674	311	677	309	<b>674</b>	<b>310</b>
511.povray_r	160	<b>638</b>	<b>586</b>	637	586	639	585	160	558	669	<b>554</b>	<b>675</b>	554	675
519.lbm_r	160	587	287	<b>585</b>	<b>289</b>	583	289	160	587	287	<b>585</b>	<b>289</b>	583	289
521.wrf_r	160	845	424	<b>845</b>	<b>424</b>	847	423	80	399	449	<b>398</b>	<b>450</b>	398	450
526.blender_r	160	<b>463</b>	<b>526</b>	463	526	462	528	160	<b>463</b>	<b>526</b>	463	526	462	528
527.cam4_r	160	534	524	<b>533</b>	<b>525</b>	533	525	160	534	524	<b>533</b>	<b>525</b>	533	525
538.imagick_r	160	255	1560	254	1560	<b>255</b>	<b>1560</b>	160	255	1560	254	1560	<b>255</b>	<b>1560</b>
544.nab_r	160	<b>284</b>	<b>950</b>	283	950	284	948	160	280	961	281	959	<b>281</b>	<b>960</b>
549.fotonik3d_r	160	<b>2081</b>	<b>300</b>	2076	300	2087	299	160	<b>2081</b>	<b>300</b>	2076	300	2087	299
554.roms_r	160	1361	187	<b>1357</b>	<b>187</b>	1356	187	80	561	227	<b>567</b>	<b>224</b>	569	223

SPECrate®2017\_fp\_base = **492**

SPECrate®2017\_fp\_peak = **519**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5,  
and the system compiler gcc 4.8.5;  
sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS and OS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

CLE Support set to Disable

Scaling\_Governor set to Performance

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Thu Dec 2 11:41:47 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5320H CPU @ 2.40GHz

4 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 492

### Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Dec-2021  
**Hardware Availability:** Sep-2020  
**Software Availability:** Dec-2020

## Platform Notes (Continued)

From lscpu from util-linux 2.32.1:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 160
On-line CPU(s) list:   0-159
Thread(s) per core:    2
Core(s) per socket:    20
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 5320H CPU @ 2.40GHz
Stepping:               11
CPU MHz:                3300.389
CPU max MHz:            4200.0000
CPU min MHz:            1000.0000
BogoMIPS:               4800.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               28160K
NUMA node0 CPU(s):     0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
NUMA node1 CPU(s):     3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
NUMA node2 CPU(s):     20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
NUMA node3 CPU(s):     23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
NUMA node4 CPU(s):     40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
NUMA node5 CPU(s):     43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
NUMA node6 CPU(s):     60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
NUMA node7 CPU(s):     63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

### Platform Notes (Continued)

cache size : 28160 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96

node 0 size: 192071 MB

node 0 free: 181592 MB

node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99

node 1 size: 193531 MB

node 1 free: 185427 MB

node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116

node 2 size: 193531 MB

node 2 free: 185459 MB

node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119

node 3 size: 193531 MB

node 3 free: 185470 MB

node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136

node 4 size: 193531 MB

node 4 free: 185456 MB

node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139

node 5 size: 193503 MB

node 5 free: 185300 MB

node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156

node 6 size: 193531 MB

node 6 free: 185356 MB

node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159

node 7 size: 193528 MB

node 7 free: 185459 MB

node distances:

node 0 1 2 3 4 5 6 7

0: 10 11 20 20 20 20 20 20

1: 11 10 20 20 20 20 20 20

2: 20 20 10 11 20 20 20 20

3: 20 20 11 10 20 20 20 20

4: 20 20 20 20 10 11 20 20

5: 20 20 20 20 11 10 20 20

6: 20 20 20 20 20 20 10 11

7: 20 20 20 20 20 20 11 10

From /proc/meminfo

MemTotal: 1583882796 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Dec-2021  
**Hardware Availability:** Sep-2020  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
```

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.2:ga

uname -a:

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Dec 1 11:43

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.7T	180G	1.6T	11%	/home

From /sys/devices/virtual/dmi/id  
Vendor: Inspur

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Platform Notes (Continued)

Product: NF8480M6  
Product Family: Family  
Serial: 379953176

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2666

BIOS:

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 05.00.00  
BIOS Date: 06/23/2021  
BIOS Revision: 5.19

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

### Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

### Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Base Portability Flags (Continued)

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf\_r: ifort icc

527.cam4\_r: ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpc icc

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

```
544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 492

Inspur NF8480M6 (Intel Xeon Gold 5320H)

SPECrate®2017\_fp\_peak = 519

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Dec-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.3.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-02 11:41:46-0500.

Report generated on 2022-01-18 19:00:41 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-18.