



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3


Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2022

Tested by: HPE

Software Availability: Jan-2022

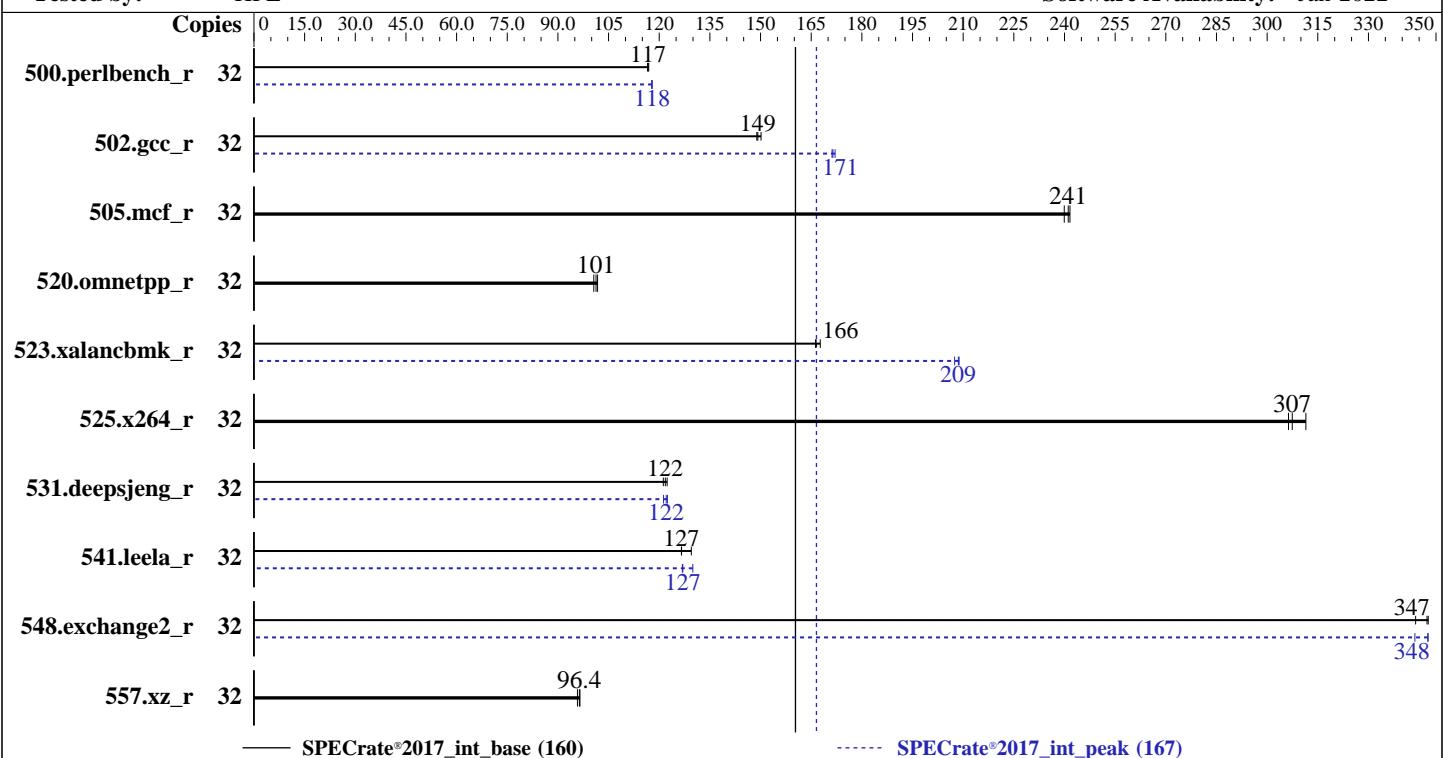

Hardware

CPU Name: AMD EPYC 7373X
Max MHz: 3800
Nominal: 3050
Enabled: 16 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 768 MB I+D on chip per chip,
96 MB shared / 2 cores
Other: None
Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
Storage: 1 x 480 GB SATA SSD, RAID 0
Other: None

Software

OS: Ubuntu 20.04.3 LTS
Compiler: Kernel 5.13.0-28-generic
Parallel: C/C++/Fortran: Version 3.2.0 of AOCC
Firmware: No
File System: HPE BIOS Version A43 v2.56 02/10/2022 released
System State: Feb-2022
Base Pointers: ext4
Peak Pointers: Run level 5 (multi-user)
Other: 64-bit
Power Management: jemalloc: jemalloc memory allocator library v5.1.0
BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2022

Tested by: HPE

Software Availability: Jan-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	437	117	436	117	436	117	32	432	118	432	118	432	118
502.gcc_r	32	302	150	304	149	304	149	32	263	172	265	171	264	171
505.mcf_r	32	214	242	216	240	214	241	32	214	242	216	240	214	241
520.omnetpp_r	32	417	101	413	102	414	101	32	417	101	413	102	414	101
523.xalancbmk_r	32	203	166	202	168	203	166	32	162	209	163	207	162	209
525.x264_r	32	182	307	183	306	180	311	32	182	307	183	306	180	311
531.deepsjeng_r	32	303	121	300	122	301	122	32	300	122	302	121	300	122
541.leela_r	32	409	129	419	127	419	127	32	417	127	418	127	408	130
548.exchange2_r	32	241	347	244	344	241	348	32	241	348	241	348	244	344
557.xz_r	32	358	96.5	361	95.8	359	96.4	32	358	96.5	361	95.8	359	96.4

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/oem/cpu2017/amd_rate_aocc320_milanx_A_lib/lib;/home/oem/cpu2017/a
     md_rate_aocc320_milanx_A_lib/lib32:"
```

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Interleaving Mode set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2022

Tested by: HPE

Software Availability: Jan-2022

Platform Notes (Continued)

NUMA memory domains per socket set to Four memory domains per socket
Infinity Fabric Power Management set to Disabled

Infinity Fabric Performance State set to P0

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

L2 HW Prefetcher set to Disabled

The system date and time as discovered by sysinfo is incorrect as the time was not updated prior to the run. The test_date field shows an accurate date for the result.

The system ROM used for this result contains microcode version 0x 0A001227h for the AMD EPYC 7nn3X family of processors. The reference code/AGESA version used in this ROM is version MilanPI 1.0.0.8.

```
Sysinfo program /home/oem/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on oem-dl325Gen10Plus Mon Jan 10 10:35:21 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7373X 16-Core Processor
  1 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings   : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu from util-linux 2.34:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
Address sizes:	48 bits physical, 48 bits virtual
CPU(s):	32
On-line CPU(s) list:	0-31
Thread(s) per core:	2
Core(s) per socket:	16
Socket(s):	1
NUMA node(s):	8
Vendor ID:	AuthenticAMD
CPU family:	25
Model:	1
Model name:	AMD EPYC 7373X 16-Core Processor

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2022

Tested by: HPE

Software Availability: Jan-2022

Platform Notes (Continued)

Stepping:	2
CPU MHz:	3044.249
BogoMIPS:	6088.49
Virtualization:	AMD-V
L1d cache:	512 KiB
L1i cache:	512 KiB
L2 cache:	8 MiB
L3 cache:	768 MiB
NUMA node0 CPU(s):	0,1,16,17
NUMA node1 CPU(s):	2,3,18,19
NUMA node2 CPU(s):	4,5,20,21
NUMA node3 CPU(s):	6,7,22,23
NUMA node4 CPU(s):	8,9,24,25
NUMA node5 CPU(s):	10,11,26,27
NUMA node6 CPU(s):	12,13,28,29
NUMA node7 CPU(s):	14,15,30,31
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full AMD retrampoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf_pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrandlahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbmb_total cqmq_mbmb_local clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	512K	8	Data	1
L1i	32K	512K	8	Instruction	1
L2	512K	8M	8	Unified	2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Platform Notes (Continued)

L3 96M 768M 16 Unified 3

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 16 17
node 0 size: 128712 MB
node 0 free: 128200 MB
node 1 cpus: 2 3 18 19
node 1 size: 129020 MB
node 1 free: 128949 MB
node 2 cpus: 4 5 20 21
node 2 size: 129022 MB
node 2 free: 128903 MB
node 3 cpus: 6 7 22 23
node 3 size: 129021 MB
node 3 free: 128809 MB
node 4 cpus: 8 9 24 25
node 4 size: 129022 MB
node 4 free: 128887 MB
node 5 cpus: 10 11 26 27
node 5 size: 129021 MB
node 5 free: 128793 MB
node 6 cpus: 12 13 28 29
node 6 size: 129022 MB
node 6 free: 128870 MB
node 7 cpus: 14 15 30 31
node 7 size: 128975 MB
node 7 free: 128857 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 12 12 12 12 12 12
 1: 11 10 12 12 12 12 12 12
 2: 12 12 10 11 12 12 12 12
 3: 12 12 11 10 12 12 12 12
 4: 12 12 12 12 10 11 12 12
 5: 12 12 12 12 11 10 12 12
 6: 12 12 12 12 12 12 10 11
 7: 12 12 12 12 12 12 11 10
```

From /proc/meminfo

```
MemTotal: 1056584228 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Platform Notes (Continued)

```
/sbin/tuned-adm active
    Current active profile: throughput-performance
```

```
/usr/bin/lsb_release -d
Ubuntu 20.04.3 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.3 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.3 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux oem-dl325Gen10Plus 5.13.0-28-generic #31~20.04.1-Ubuntu SMP Wed Jan 19 14:08:10
UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 5 Jan 10 10:27
```

```
SPEC is set to: /home/oem/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  439G  17G  401G   4%  /
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

Vendor: HPE
Product: ProLiant DL325 Gen10 Plus v2
Product Family: ProLiant
Serial: CN70381LLR

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Hynix HMABAGL7ABR4N-XN 128 GB 4 rank 3200
8x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor: HPE
BIOS Version: A43
BIOS Date: 02/10/2022
BIOS Revision: 2.56
Firmware Revision: 2.60

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Compiler Version Notes (Continued)

=====

C | 502.gcc_r(peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 523.xalancbmk_r(peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

C++ | 523.xalancbmk_r(peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -flang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

```
502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

```
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

```
531.deepsjeng_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

541.leela_r: Same as 531.deepsjeng_r

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

```
502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

```
523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-01-10 00:05:20-0500.

Report generated on 2022-03-22 10:11:52 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.