



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro


A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Feb-2022

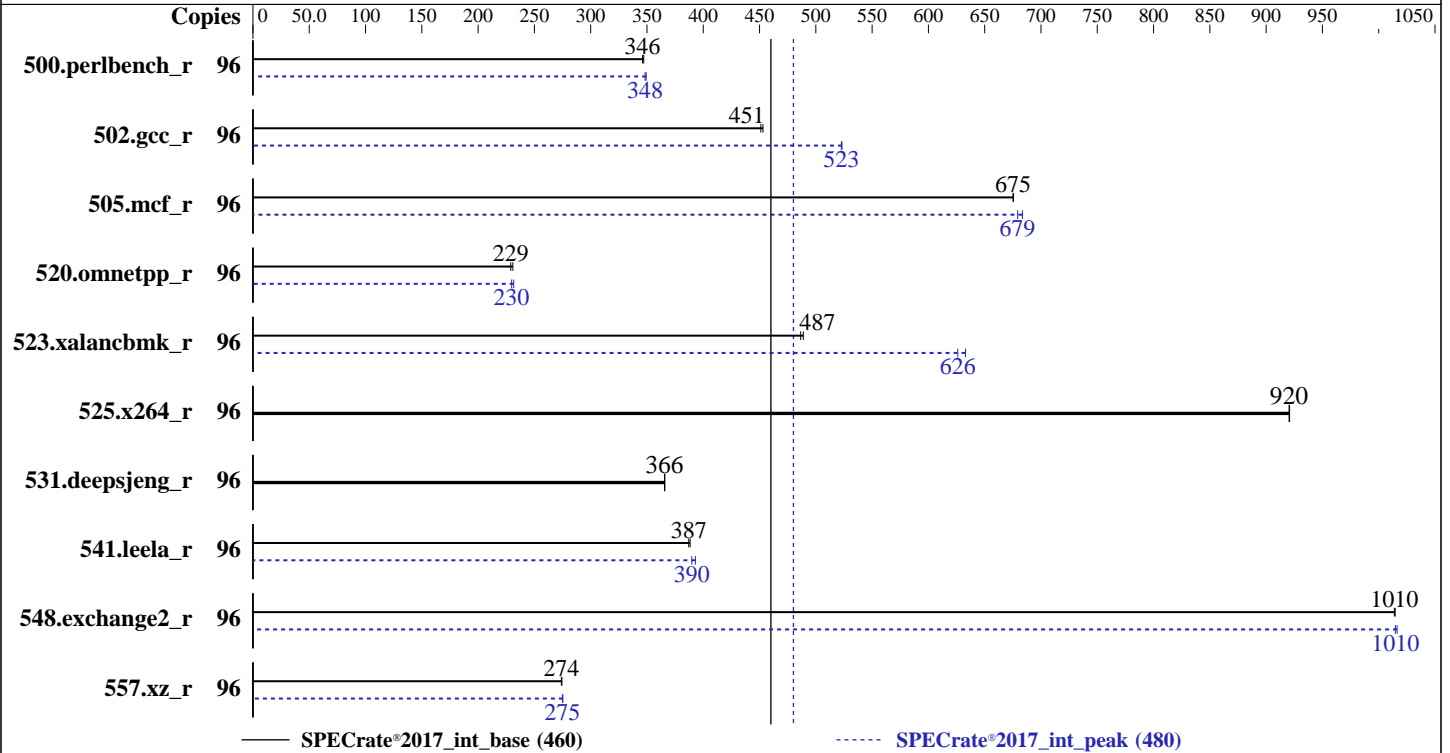

### Hardware

CPU Name: AMD EPYC 7473X  
Max MHz: 3700  
Nominal: 2800  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 768 MB I+D on chip per chip, 96 MB shared / 3 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: Ubuntu 20.04.3 LTS  
Kernel 5.4.0-99-generic  
Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
Parallel: No  
Firmware: Version 2.3a released Jan-2022  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc: jemalloc memory allocator library v5.1.0  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Feb-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	440	347	<b>442</b>	<b>346</b>			96	438	349	<b>439</b>	<b>348</b>		
502.gcc_r	96	300	453	<b>301</b>	<b>451</b>			96	<b>260</b>	<b>523</b>	260	523		
505.mcf_r	96	230	676	<b>230</b>	<b>675</b>			96	227	684	<b>228</b>	<b>679</b>		
520.omnetpp_r	96	546	231	<b>550</b>	<b>229</b>			96	544	232	<b>548</b>	<b>230</b>		
523.xalancbmk_r	96	207	489	<b>208</b>	<b>487</b>			96	160	633	<b>162</b>	<b>626</b>		
525.x264_r	96	183	921	<b>183</b>	<b>920</b>			96	183	921	<b>183</b>	<b>920</b>		
531.deepsjeng_r	96	<b>301</b>	<b>366</b>	301	366			96	<b>301</b>	<b>366</b>	301	366		
541.leela_r	96	<b>411</b>	<b>387</b>	409	388			96	<b>408</b>	<b>390</b>	405	393		
548.exchange2_r	96	<b>248</b>	<b>1010</b>	248	1010			96	<b>248</b>	<b>1010</b>	247	1020		
557.xz_r	96	<b>378</b>	<b>274</b>	378	274			96	<b>377</b>	<b>275</b>	377	275		

SPECrate®2017\_int\_base = **460**

SPECrate®2017\_int\_peak = **480**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/amd\_rate\_aocc320\_milanx\_A\_lib/lib;/home/cpu2017/amd\_rate\_aocc320\_milanx\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:  
MALLOC\_CONF = "thp:never"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Settings:  
Determinism Control = Manual  
Determinism Slider = Power  
cTDP Control = Manual  
cTDP = 280  
Package Power Limit Control = Manual  
Package Power Limit = 280

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

### Platform Notes (Continued)

APBDIS = 1  
NUMA Nodes Per Socket = NPS4

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on h12dsu-7473x Fri Feb 18 11:42:11 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7473X 24-Core Processor
 2 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings  : 48
 physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
 physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

```
From lscpu from util-linux 2.34:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          48 bits physical, 48 bits virtual
CPU(s):                 96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
NUMA node(s):          16
Vendor ID:              AuthenticAMD
CPU family:             25
Model:                  1
Model name:             AMD EPYC 7473X 24-Core Processor
Stepping:               2
Frequency boost:        enabled
CPU MHz:                1799.580
CPU max MHz:            2800.0000
CPU min MHz:            1500.0000
BogoMIPS:               5600.16
Virtualization:         AMD-V
L1d cache:              1.5 MiB
L1i cache:              1.5 MiB
L2 cache:               24 MiB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

### Platform Notes (Continued)

```

L3 cache:                1.5 GiB
NUMA node0 CPU(s):      0-2,48-50
NUMA node1 CPU(s):      3-5,51-53
NUMA node2 CPU(s):      6-8,54-56
NUMA node3 CPU(s):      9-11,57-59
NUMA node4 CPU(s):      12-14,60-62
NUMA node5 CPU(s):      15-17,63-65
NUMA node6 CPU(s):      18-20,66-68
NUMA node7 CPU(s):      21-23,69-71
NUMA node8 CPU(s):      24-26,72-74
NUMA node9 CPU(s):      27-29,75-77
NUMA node10 CPU(s):     30-32,78-80
NUMA node11 CPU(s):     33-35,81-83
NUMA node12 CPU(s):     36-38,84-86
NUMA node13 CPU(s):     39-41,87-89
NUMA node14 CPU(s):     42-44,90-92
NUMA node15 CPU(s):     45-47,93-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected
Flags:                      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1.5M	8	Data	1
L1i	32K	1.5M	8	Instruction	1
L2	512K	24M	8	Unified	2

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

### Platform Notes (Continued)

L3 96M 1.5G 16 Unified 3

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware
```

```
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 48 49 50
node 0 size: 64381 MB
node 0 free: 64170 MB
node 1 cpus: 3 4 5 51 52 53
node 1 size: 64479 MB
node 1 free: 64296 MB
node 2 cpus: 6 7 8 54 55 56
node 2 size: 64510 MB
node 2 free: 64331 MB
node 3 cpus: 9 10 11 57 58 59
node 3 size: 64509 MB
node 3 free: 64339 MB
node 4 cpus: 12 13 14 60 61 62
node 4 size: 64510 MB
node 4 free: 64369 MB
node 5 cpus: 15 16 17 63 64 65
node 5 size: 64509 MB
node 5 free: 64375 MB
node 6 cpus: 18 19 20 66 67 68
node 6 size: 64510 MB
node 6 free: 64135 MB
node 7 cpus: 21 22 23 69 70 71
node 7 size: 64497 MB
node 7 free: 64308 MB
node 8 cpus: 24 25 26 72 73 74
node 8 size: 64510 MB
node 8 free: 64397 MB
node 9 cpus: 27 28 29 75 76 77
node 9 size: 64509 MB
node 9 free: 64391 MB
node 10 cpus: 30 31 32 78 79 80
node 10 size: 64510 MB
node 10 free: 64398 MB
node 11 cpus: 33 34 35 81 82 83
node 11 size: 64509 MB
node 11 free: 64395 MB
node 12 cpus: 36 37 38 84 85 86
node 12 size: 64510 MB
node 12 free: 64400 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Feb-2022

### Platform Notes (Continued)

```

node 13 cpus: 39 40 41 87 88 89
node 13 size: 64509 MB
node 13 free: 64398 MB
node 14 cpus: 42 43 44 90 91 92
node 14 size: 64510 MB
node 14 free: 64401 MB
node 15 cpus: 45 46 47 93 94 95
node 15 size: 64508 MB
node 15 free: 64397 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
6:  12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10: 32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11: 32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12: 32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13: 32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11
15: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10

```

```

From /proc/meminfo
MemTotal:      1056754120 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

/usr/bin/lsb_release -d
Ubuntu 20.04.3 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
NAME="Ubuntu"
VERSION="20.04.3 LTS (Focal Fossa)"

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

### Platform Notes (Continued)

```
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.3 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux h12dsu-7473x 5.4.0-99-generic #112-Ubuntu SMP Thu Feb 3 13:50:55 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Feb 18 11:37
```

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 ext4 178G 23G 147G 14% /
```

```
From /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: AS-2024US-TRT
Serial: 0123456789
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x NO DIMM Unknown
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

### Platform Notes (Continued)

BIOS:

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 2.3a  
BIOS Date: 01/25/2022  
BIOS Revision: 5.22

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

### Compiler Version Notes (Continued)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 523.xalanbmk\_r(peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 523.xalanbmk\_r(peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

## Compiler Version Notes (Continued)

-----  
=====  
Fortran | 548.exchange2\_r(base, peak)  
-----

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp  
-flto -Wl,-mllvm -Wl,-region-vectorize

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

## Base Other Flags (Continued)

C++ benchmarks:  
-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

```
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

```
502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

```
505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

## Peak Optimization Flags (Continued)

520.omnetpp\_r (continued):

-lamdlibm -ljemalloc

523.xalancbmk\_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto

-Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver3 -fveclib=AMDLIBM -ffast-math

-finline-aggressive -mllvm -unroll-threshold=100

-flv-function-specialization -mllvm -enable-licm-vrp

-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch

-mllvm -reduce-array-computations=3

-mllvm -global-vectorize-slp=true

-mllvm -do-block-reorder=aggressive

-fvirtual-function-elimination -fvisibility=hidden

-ljemalloc

531.deepsjeng\_r: basepeak = yes

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-inline-recursion=4

-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split

-flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3

-fveclib=AMDLIBM -ffast-math -mllvm -unroll-aggressive

-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd\_rate\_aocc320\_milanx\_A\_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd\_rate\_aocc320\_milanx\_A\_lib/lib32



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2024US-TRT  
(H12DSU-iN , AMD EPYC 7473X)

SPECrate®2017\_int\_base = 460

SPECrate®2017\_int\_peak = 480

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Feb-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-18 06:42:10-0500.

Report generated on 2022-03-22 10:58:08 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-22.