



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion


SPECspeed®2017\_int\_base = 11.7

### xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Apr-2022  
Hardware Availability: Feb-2020  
Software Availability: May-2021

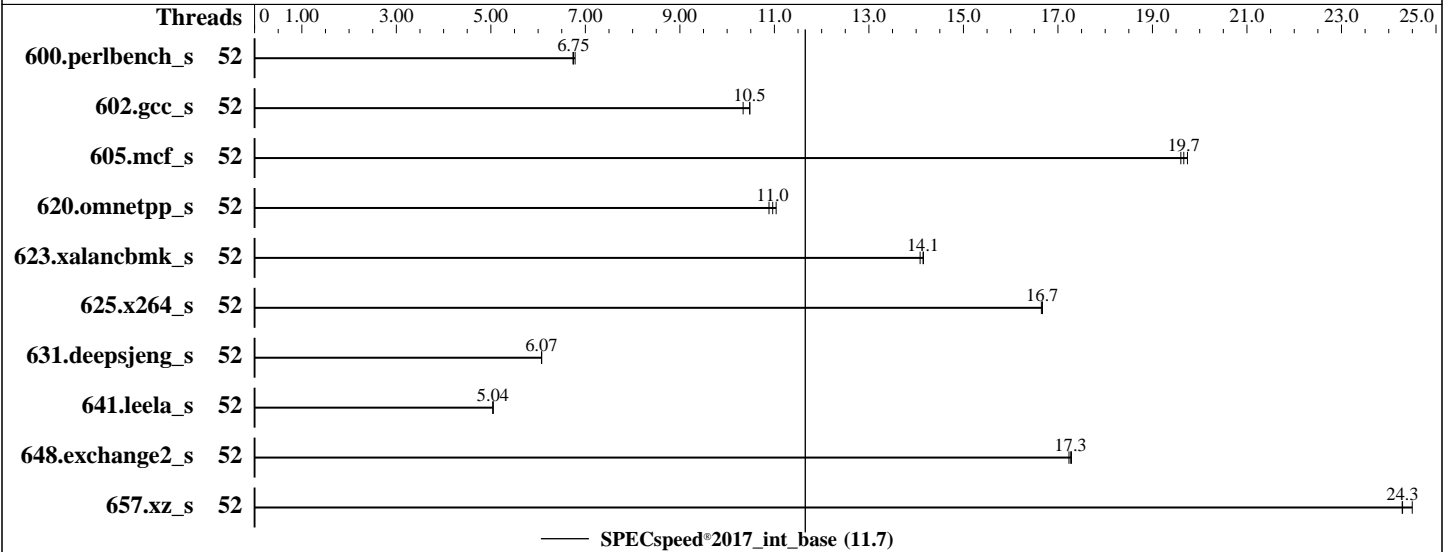

### Hardware

CPU Name: Intel Xeon Gold 6230R  
Max MHz: 4000  
Nominal: 2100  
Enabled: 52 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86\_64  
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux  
Parallel: Yes  
Firmware: Version 8.23 Released Dec-2021  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_int\_base = 11.7

## xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Apr-2022  
Hardware Availability: Feb-2020  
Software Availability: May-2021

### Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	52	263	6.74	262	6.78	<b>263</b>	<b>6.75</b>							
602.gcc_s	52	<b>380</b>	<b>10.5</b>	380	10.5	385	10.3							
605.mcf_s	52	239	19.7	<b>240</b>	<b>19.7</b>	241	19.6							
620.omnetpp_s	52	148	11.0	<b>149</b>	<b>11.0</b>	150	10.9							
623.xalancbmk_s	52	100	14.2	<b>100</b>	<b>14.1</b>	101	14.1							
625.x264_s	52	106	16.6	<b>106</b>	<b>16.7</b>	106	16.7							
631.deepsjeng_s	52	236	6.07	236	6.08	<b>236</b>	<b>6.07</b>							
641.leela_s	52	338	5.04	338	5.05	<b>338</b>	<b>5.04</b>							
648.exchange2_s	52	170	17.3	<b>170</b>	<b>17.3</b>	171	17.2							
657.xz_s	52	<b>254</b>	<b>24.3</b>	252	24.5	255	24.3							

SPECspeed®2017\_int\_base = 11.7

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/spec2017/lib/intel64:/spec2017/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

### General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_int\_base = 11.7

### xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2021

## General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Power Policy Set to Load Balance

Hyper-Threading Set to Disabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Fri Apr 1 15:54:38 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6230R CPU @ 2.10GHz

2 "physical id"s (chips)

52 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26

siblings : 26

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu from util-linux 2.32.1:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 52  
On-line CPU(s) list: 0-51  
Thread(s) per core: 1  
Core(s) per socket: 26  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
BIOS Vendor ID: Intel(R) Corporation  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6230R CPU @ 2.10GHz  
BIOS Model name: Intel(R) Xeon(R) Gold 6230R CPU @ 2.10GHz  
Stepping: 7

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_int\_base = 11.7

### xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2021

### Platform Notes (Continued)

```

CPU MHz: 1384.913
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-25
NUMA node1 CPU(s): 26-51
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid cqm mpx
rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
node 0 size: 385243 MB
node 0 free: 378701 MB
node 1 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50
51
node 1 size: 387028 MB
node 1 free: 385776 MB
node distances:
node 0 1
0: 10 21
1: 21 10

```

From /proc/meminfo

```

MemTotal: 790806588 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_int\_base = 11.7

### xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2021

## Platform Notes (Continued)

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.4 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.4"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):           KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                           Bypass disabled via prctl and
                                           seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs
                                           barriers and __user pointer
                                           sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Enhanced IBRS, IBPB:
                                           conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Mitigation: TSX disabled

run-level 3 Apr 1 15:53

SPEC is set to: /spec2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3       xfs       859G      61G  799G   8% /

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_int\_base = 11.7

### xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2021

## Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
Vendor:          XFUSION
Product:         2288H V5
Product Family:  Purley
Serial:          Serial
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  22x Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933
  2x Hynix HMA84GR7JJR4N-WM 32 GB 2 rank 2933
```

```
BIOS:
  BIOS Vendor:      INSYDE Corp.
  BIOS Version:     8.23
  BIOS Date:        12/30/2021
  BIOS Revision:    8.23
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C          | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)  
          | 625.x264_s(base) 657.xz_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++       | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)  
         | 641.leela_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
Fortran   | 648.exchange2_s(base)  
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**xFusion**

SPECspeed®2017\_int\_base = 11.7

**xFusion 2288H V5 (Intel Xeon Gold 6230R)**

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Apr-2022  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2021

## Compiler Version Notes (Continued)

Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-DSPEC\_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512  
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-DSPEC\_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64\_lin/

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**xFusion**

SPECspeed®2017\_int\_base = 11.7

xFusion 2288H V5 (Intel Xeon Gold 6230R)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Apr-2022

**Hardware Availability:** Feb-2020

**Software Availability:** May-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lqkmalloc

Fortran benchmarks:

-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto

-mbranches-within-32B-boundaries

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-01 15:54:37-0400.

Report generated on 2022-04-29 13:23:41 by CPU2017 PDF formatter v6442.

Originally published on 2022-04-27.