



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Aug-2022  
Hardware Availability: Aug-2022  
Software Availability: Feb-2022

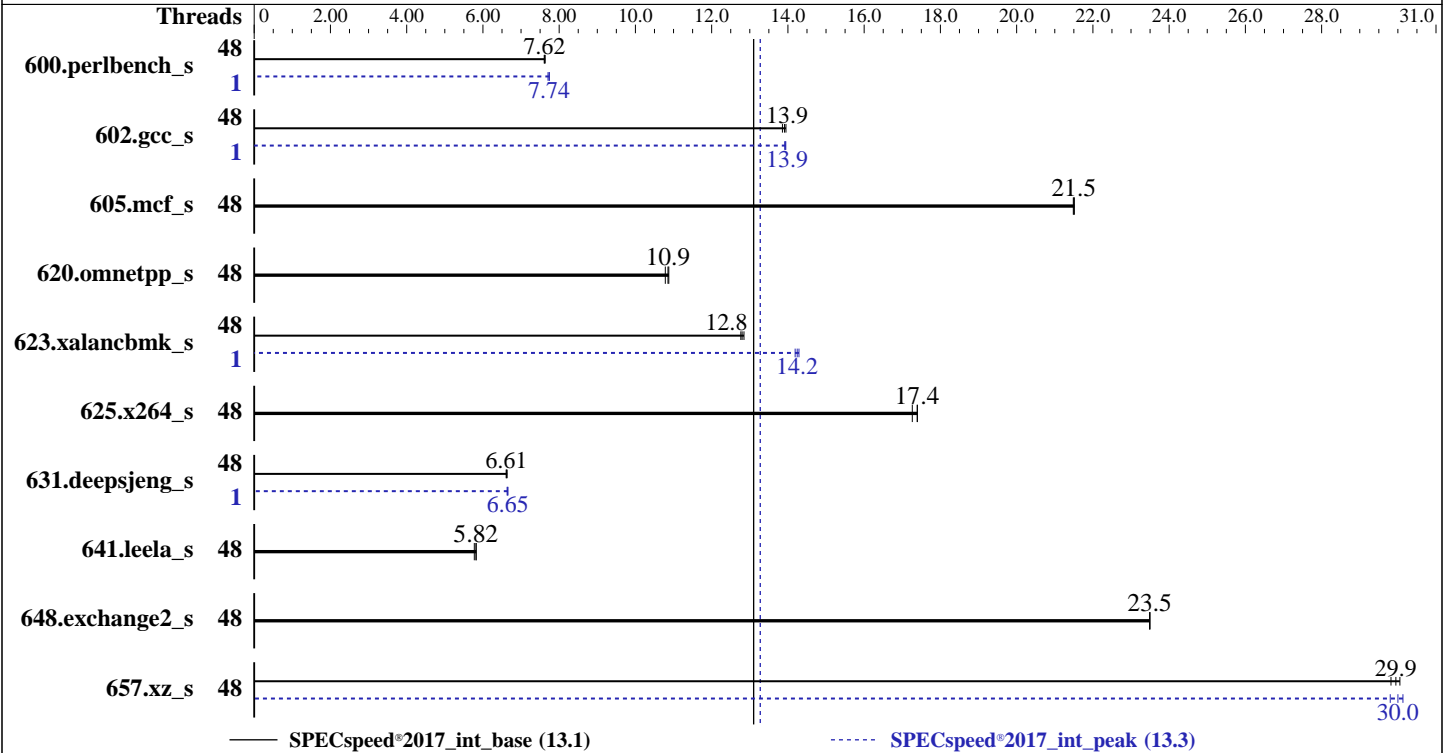

### Hardware

CPU Name: AMD EPYC 7473X  
Max MHz: 3700  
Nominal: 2800  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 768 MB I+D on chip per chip,  
96 MB shared / 3 cores  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux 8.5 (Ootpa)  
Kernel 4.18.0-348.el8.x86\_64  
Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
Parallel: Yes  
Firmware: Lenovo BIOS Version D8E125H 2.41 released Aug-2022  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc: jemalloc memory allocator library v5.1.0  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Aug-2022  
Hardware Availability: Aug-2022  
Software Availability: Feb-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	233	7.63	<b><u>233</u></b>	<b><u>7.62</u></b>	233	7.61	1	229	7.74	<b><u>229</u></b>	<b><u>7.74</u></b>	230	7.71
602.gcc_s	48	285	13.9	287	13.9	<b><u>286</u></b>	<b><u>13.9</u></b>	1	286	13.9	<b><u>286</u></b>	<b><u>13.9</u></b>	286	13.9
605.mcf_s	48	<b><u>220</u></b>	<b><u>21.5</u></b>	219	21.5	220	21.5	48	<b><u>220</u></b>	<b><u>21.5</u></b>	219	21.5	220	21.5
620.omnetpp_s	48	150	10.9	151	10.8	<b><u>150</u></b>	<b><u>10.9</u></b>	48	150	10.9	151	10.8	<b><u>150</u></b>	<b><u>10.9</u></b>
623.xalancbmk_s	48	<b><u>111</u></b>	<b><u>12.8</u></b>	110	12.8	111	12.8	1	<b><u>99.5</u></b>	<b><u>14.2</u></b>	99.2	14.3	99.9	14.2
625.x264_s	48	101	17.4	<b><u>101</u></b>	<b><u>17.4</u></b>	102	17.3	48	101	17.4	<b><u>101</u></b>	<b><u>17.4</u></b>	102	17.3
631.deepsjeng_s	48	<b><u>217</u></b>	<b><u>6.61</u></b>	216	6.64	217	6.61	1	215	6.65	216	6.63	<b><u>215</u></b>	<b><u>6.65</u></b>
641.leela_s	48	<b><u>293</u></b>	<b><u>5.82</u></b>	295	5.77	293	5.82	48	<b><u>293</u></b>	<b><u>5.82</u></b>	295	5.77	293	5.82
648.exchange2_s	48	125	23.5	125	23.5	<b><u>125</u></b>	<b><u>23.5</u></b>	48	125	23.5	125	23.5	<b><u>125</u></b>	<b><u>23.5</u></b>
657.xz_s	48	206	30.1	<b><u>206</u></b>	<b><u>29.9</u></b>	207	29.8	48	<b><u>206</u></b>	<b><u>30.0</u></b>	205	30.1	207	29.8

SPECspeed®2017\_int\_base = **13.1**

SPECspeed®2017\_int\_peak = **13.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2022  
**Hardware Availability:** Aug-2022  
**Software Availability:** Feb-2022

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-95"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-amd-milanx-aocc320-A1/amd\_speed\_aocc320\_milanx\_A\_li  
b/lib;/home/cpu2017-1.1.8-amd-milanx-aocc320-A1/amd\_speed\_aocc320\_milanx  
\_A\_lib/lib32:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "96"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalanbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2022  
**Hardware Availability:** Aug-2022  
**Software Availability:** Feb-2022

### General Notes (Continued)

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

BIOS configuration:  
Operating Mode set to Maximum Performance and then set it to Custom Mode  
SOC P-states set to P0  
NUMA Nodes per Socket set to NPS2

Sysinfo program /home/cpu2017-1.1.8-amd-milanx-aocc320-A1/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Wed Aug 31 03:53:00 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7473X 24-Core Processor  
2 "physical id"s (chips)  
96 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 24  
siblings : 48  
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30  
physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu from util-linux 2.32.1:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 96  
On-line CPU(s) list: 0-95  
Thread(s) per core: 2  
Core(s) per socket: 24  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: AuthenticAMD  
BIOS Vendor ID: Advanced Micro Devices, Inc.  
CPU family: 25  
Model: 1

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2022

Hardware Availability: Aug-2022

Software Availability: Feb-2022

### Platform Notes (Continued)

```

Model name: AMD EPYC 7473X 24-Core Processor
BIOS Model name: AMD EPYC 7473X 24-Core Processor
Stepping: 2
CPU MHz: 2800.000
CPU max MHz: 3737.8899
CPU min MHz: 1500.0000
BogoMIPS: 5589.38
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 98304K
NUMA node0 CPU(s): 0-11,48-59
NUMA node1 CPU(s): 12-23,60-71
NUMA node2 CPU(s): 24-35,72-83
NUMA node3 CPU(s): 36-47,84-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid overflow_recov
succor smca fsrm sme sev sev_es

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 48 49 50 51 52 53 54 55 56 57 58 59
node 0 size: 128767 MB
node 0 free: 128277 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 60 61 62 63 64 65 66 67 68 69 70 71
node 1 size: 129004 MB
node 1 free: 128653 MB
node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 72 73 74 75 76 77 78 79 80 81 82 83
node 2 size: 129016 MB
node 2 free: 128643 MB
node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 128978 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2022

**Hardware Availability:** Aug-2022

**Software Availability:** Feb-2022

### Platform Notes (Continued)

node 3 free: 128743 MB

node distances:

node	0	1	2	3
0:	10	12	32	32
1:	12	10	32	32
2:	32	32	10	12
3:	32	32	12	10

From /proc/meminfo

MemTotal: 528146128 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.5 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.5"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8::baseos

uname -a:

Linux localhost.localdomain 4.18.0-348.el8.x86\_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2022  
**Hardware Availability:** Aug-2022  
**Software Availability:** Feb-2022

### Platform Notes (Continued)

```

barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline,
IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

```

run-level 3 Aug 31 03:51

SPEC is set to: /home/cpu2017-1.1.8-amd-milanx-aocc320-A1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	819G	351G	468G	43%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR665-2S
Product Family: ThinkSystem
Serial:          1234567890

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

```

BIOS:
  BIOS Vendor:      Lenovo
  BIOS Version:     D8E125H-2.41
  BIOS Date:        07/08/2022
  BIOS Revision:    2.41
  Firmware Revision: 4.12

```

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
-----

```

```

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2022  
**Hardware Availability:** Aug-2022  
**Software Availability:** Feb-2022

### Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

### Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2022

Hardware Availability: Aug-2022

Software Availability: Feb-2022

## Base Portability Flags (Continued)

631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false -z muldefs
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2022

**Hardware Availability:** Aug-2022

**Software Availability:** Feb-2022

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2022

Hardware Availability: Aug-2022

Software Availability: Feb-2022

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

602.gcc\_s: Same as 600.perlbench\_s

605.mcf\_s: basepeak = yes

625.x264\_s: basepeak = yes

657.xz\_s: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays  
-mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -do-block-reorder=aggressive -DSPEC\_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-flv-function-specialization -mllvm -enable-licm-vrp  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-DSPEC\_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang

631.deepsjeng\_s: -m64 -Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-Wl,-mllvm -Wl,-region-vectorize

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2022

Hardware Availability: Aug-2022

Software Availability: Feb-2022

## Peak Optimization Flags (Continued)

631.deepsjeng\_s (continued):

```

-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang

```

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-MilanX-L.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-MilanX-L.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.80 GHz, AMD EPYC 7473X

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2022

**Hardware Availability:** Aug-2022

**Software Availability:** Feb-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-30 15:52:59-0400.  
Report generated on 2022-09-27 17:13:35 by CPU2017 PDF formatter v6442.  
Originally published on 2022-09-27.