



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082


Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

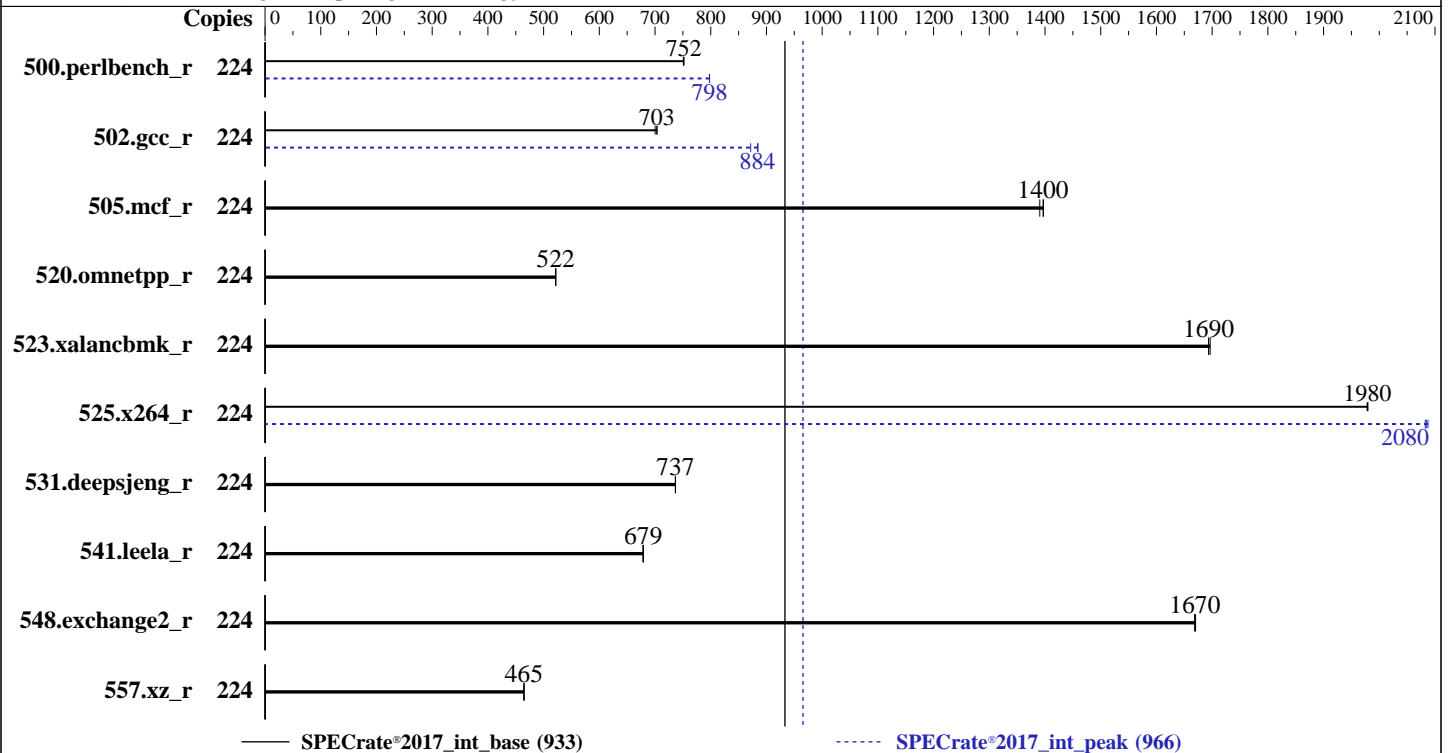

Hardware

CPU Name: Intel Xeon Platinum 8480+
 Max MHz: 3800
 Nominal: 2000
 Enabled: 112 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)

Storage: 1 x 3.84 TB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default

Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler
 for Linux;

Parallel: No

Firmware: Version F06 released Dec-2022

File System: xfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 32/64-bit

Other: jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Date: Jan-2023

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Jan-2023

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	474	752	475	751	474	752	224	447	798	447	798	447	798
502.gcc_r	224	453	700	451	703	451	704	224	358	885	364	872	359	884
505.mcf_r	224	259	1400	260	1390	259	1400	224	259	1400	260	1390	259	1400
520.omnetpp_r	224	564	521	563	522	563	522	224	564	521	563	522	563	522
523.xalancbmk_r	224	139	1700	140	1690	140	1690	224	139	1700	140	1690	140	1690
525.x264_r	224	198	1980	198	1980	198	1980	224	188	2090	188	2080	188	2080
531.deepsjeng_r	224	349	737	348	737	349	737	224	349	737	348	737	349	737
541.leela_r	224	546	679	546	679	547	678	224	546	679	546	679	547	678
548.exchange2_r	224	351	1670	352	1670	352	1670	224	351	1670	352	1670	352	1670
557.xz_r	224	520	465	520	465	521	465	224	520	465	520	465	521	465

SPECrate®2017_int_base = 933

SPECrate®2017_int_peak = 966

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
setterm -powersave off -blank 0
cpupower frequency-set -g performance
service irqbalance stop
echo 0 > /proc/sys/kernel/numa_balancing
echo 40 > /proc/sys/vm/dirty_ratio
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
Power Policy Quick Settings = Best Performance
SR-IOV Support = Disabled
SNC = Enable SNC4 (4-clusters)
Intel VT for Directed I/O (VT-d) = Enabled
Enable LP [Global] = Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Jan 6 18:12:34 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
18:12:34 up 15:45, 1 user, load average: 0.00, 0.00, 0.00
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU WHAT
root      pts/1    10.1.111.161  18:03       2.00s      1.07s      0.00s -bash

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126540
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126540
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/1
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Platform Notes (Continued)

\$SPEC = /home/cpu2017

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8480+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0000c0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 56
siblings       : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids 0-111
physical id 1: apicids 128-239

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                224
On-line CPU(s) list:   0-223
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8480+
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    56
Socket(s):              2
Stepping:              8
CPU max MHz:           3800.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

Virtualization:
L1d cache:
L1i cache:
L2 cache:
L3 cache:
NUMA node(s):
NUMA node0 CPU(s):
NUMA node1 CPU(s):
NUMA node2 CPU(s):
NUMA node3 CPU(s):
NUMA node4 CPU(s):
NUMA node5 CPU(s):
NUMA node6 CPU(s):
NUMA node7 CPU(s):
Vulnerability Itlb multihit:
Vulnerability L1tf:
Vulnerability Mds:
Vulnerability Meltdown:
Vulnerability Spec store bypass:
Vulnerability Spectre v1:
Vulnerability Spectre v2:
Vulnerability Srbds:
Vulnerability Tsx async abort:

```

amx_tile flush_lld arch_capabilities
VT-x
5.3 MiB (112 instances)
3.5 MiB (112 instances)
224 MiB (112 instances)
210 MiB (2 instances)
8
0-13,112-125
14-27,126-139
28-41,140-153
42-55,154-167
56-69,168-181
70-83,182-195
84-97,196-209
98-111,210-223
Not affected
Not affected
Not affected
Not affected
Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Mitigation; usercopy/swaps barriers and __user pointer sanitization
Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-13,112-125
node 0 size: 128623 MB
node 0 free: 113294 MB
node 1 cpus: 14-27,126-139
node 1 size: 128982 MB
node 1 free: 118009 MB
node 2 cpus: 28-41,140-153
node 2 size: 129016 MB
node 2 free: 118003 MB
node 3 cpus: 42-55,154-167
node 3 size: 129016 MB
node 3 free: 118025 MB
node 4 cpus: 56-69,168-181
node 4 size: 129016 MB
node 4 free: 117743 MB
node 5 cpus: 70-83,182-195
node 5 size: 129016 MB
node 5 free: 117974 MB
node 6 cpus: 84-97,196-209
node 6 size: 129016 MB
node 6 free: 118042 MB
node 7 cpus: 98-111,210-223
node 7 size: 128969 MB
node 7 free: 117940 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Date: Jan-2023

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Jan-2023

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10
```

```
-----
9. /proc/meminfo
   MemTotal:      1056420444 kB
```

```
-----
10. who -r
    run-level 3 Jan 6 02:28
```

```
-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target  Status
    multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                  irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels
                  rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                  wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell dmraid-activation ebttables
                  exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init
                  iscsid iscsiio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd munge nfs
                  nfs-blkmap nmb ntp-wait ntpd rdisc rpcbind rpmconfigcheck rsyncd salt-minion serial-getty@
                  slurmd smartd_generate_opts smb snmpd snmptrapd svnserve systemd-boot-check-no-failures
                  systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2
                  ypbind
    indirect       wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=9d5fa92c-859c-4d95-88c2-93940c809d39
    splash=silent
    mitigations=auto
    quiet
    security=apparmor
```

```
-----
14. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 800 MHz and 3.80 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.

    boost state support:
        Supported: yes
        Active: yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Platform Notes (Continued)

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

19. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   1.0T   96G  929G  10% /
```

20. /sys/devices/virtual/dmi/id

```
Vendor:      Giga Computing
Product:     R283-S91-AAE2-000
Product Family: Server
Serial:      01234567890123456789AB
```

21. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: GIGABYTE
BIOS Version: F06
BIOS Date: 12/13/2022
BIOS Revision: 5.29

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

502.gcc_r: -m32

```
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemallo
```

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast

```
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-SPR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-SPR-rev1.0.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

SPECrate®2017_int_base = 933

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_int_peak = 966

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-06 05:12:33-0500.

Report generated on 2024-01-29 17:20:01 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-01.