



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573


Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

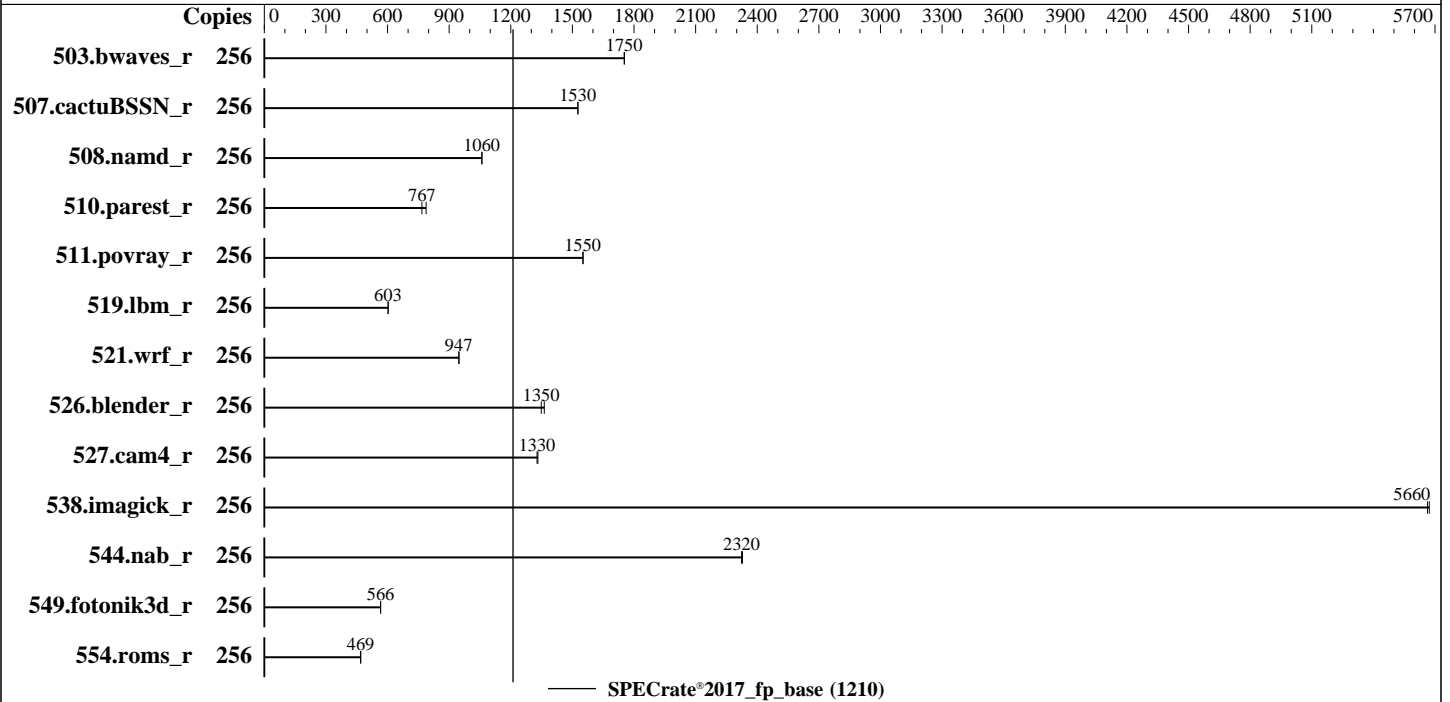

### Hardware

CPU Name: AMD EPYC 9554  
 Max MHz: 3750  
 Nominal: 3100  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 130 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.1 LTS  
 5.15.0-46-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.0.2 released Oct-2022  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2022  
Hardware Availability: Feb-2023  
Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	1465	1750	<b>1465</b>	<b>1750</b>									
507.cactuBSSN_r	256	<b>212</b>	<b>1530</b>	212	1530									
508.namd_r	256	<b>230</b>	<b>1060</b>	229	1060									
510.parest_r	256	<b>873</b>	<b>767</b>	850	788									
511.povray_r	256	<b>385</b>	<b>1550</b>	385	1550									
519.lbm_r	256	448	603	<b>448</b>	<b>603</b>									
521.wrf_r	256	<b>606</b>	<b>947</b>	605	948									
526.blender_r	256	<b>289</b>	<b>1350</b>	286	1360									
527.cam4_r	256	336	1330	<b>337</b>	<b>1330</b>									
538.imagick_r	256	112	5670	<b>112</b>	<b>5660</b>									
544.nab_r	256	185	2330	<b>185</b>	<b>2320</b>									
549.fotonik3d_r	256	1762	566	<b>1762</b>	<b>566</b>									
554.roms_r	256	<b>868</b>	<b>469</b>	866	469									

SPECrate®2017\_fp\_base = 1210

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_rate_aocc400_genoa_B_lib/lib
:/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_rate_aocc400_genoa_B_lib/lib
32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 130 GB ramdisk created with the cmd: "mount -t tmpfs -o size=130G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:  
DRAM Refresh Delay : Performance  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled  
Logical Processor : Enabled  
Virtualization Technology : Disabled  
L1 Stride Prefetcher : Disabled  
NUMA Nodes per Socket : 4  
L3 Cache as NUMA Domain : Enabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

System Profile : Custom  
 Memory Patrol Scrub : Disabled  
 PCI ASPM L1 Link  
 Power Management : Disabled  
 Determinism Slider : Power Determinism

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc400-Blb/bin/sysinfo  
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
 running on amd-sut Fri Nov 4 20:59:09 2022

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : AMD EPYC 9554 64-Core Processor  
 2 "physical id"s (chips)  
 256 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following  
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 64  
 siblings : 128  
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
 53 54 55 56 57 58 59 60 61 62 63  
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
 53 54 55 56 57 58 59 60 61 62 63

From lscpu from util-linux 2.37.2:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Address sizes: 52 bits physical, 57 bits virtual  
 Byte Order: Little Endian  
 CPU(s): 256  
 On-line CPU(s) list: 0-255  
 Vendor ID: AuthenticAMD  
 Model name: AMD EPYC 9554 64-Core Processor  
 CPU family: 25  
 Model: 17  
 Thread(s) per core: 2  
 Core(s) per socket: 64  
 Socket(s): 2  
 Stepping: 1  
 Frequency boost: enabled  
 CPU max MHz: 3764.0000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```

CPU min MHz:                400.0000
BogoMIPS:                   6201.46
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
la57 rdpid overflow_recov succor smca fsrm flush_lld
Virtualization:             AMD-V
L1d cache:                  4 MiB (128 instances)
L1i cache:                  4 MiB (128 instances)
L2 cache:                   128 MiB (128 instances)
L3 cache:                   512 MiB (16 instances)
NUMA node(s):               16
NUMA node0 CPU(s):         0-7,128-135
NUMA node1 CPU(s):         32-39,160-167
NUMA node2 CPU(s):         16-23,144-151
NUMA node3 CPU(s):         48-55,176-183
NUMA node4 CPU(s):         24-31,152-159
NUMA node5 CPU(s):         56-63,184-191
NUMA node6 CPU(s):         8-15,136-143
NUMA node7 CPU(s):         40-47,168-175
NUMA node8 CPU(s):         64-71,192-199
NUMA node9 CPU(s):         96-103,224-231
NUMA node10 CPU(s):        80-87,208-215
NUMA node11 CPU(s):        112-119,240-247
NUMA node12 CPU(s):        88-95,216-223
NUMA node13 CPU(s):        120-127,248-255
NUMA node14 CPU(s):        72-79,200-207
NUMA node15 CPU(s):        104-111,232-239
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaggs barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

```
node 0 cpus: 0 1 2 3 4 5 6 7 128 129 130 131 132 133 134 135
node 0 size: 96310 MB
node 0 free: 95466 MB
node 1 cpus: 32 33 34 35 36 37 38 39 160 161 162 163 164 165 166 167
node 1 size: 96763 MB
node 1 free: 95990 MB
node 2 cpus: 16 17 18 19 20 21 22 23 144 145 146 147 148 149 150 151
node 2 size: 96764 MB
node 2 free: 95905 MB
node 3 cpus: 48 49 50 51 52 53 54 55 176 177 178 179 180 181 182 183
node 3 size: 96763 MB
node 3 free: 95998 MB
node 4 cpus: 24 25 26 27 28 29 30 31 152 153 154 155 156 157 158 159
node 4 size: 96764 MB
node 4 free: 96003 MB
node 5 cpus: 56 57 58 59 60 61 62 63 184 185 186 187 188 189 190 191
node 5 size: 96763 MB
node 5 free: 96007 MB
node 6 cpus: 8 9 10 11 12 13 14 15 136 137 138 139 140 141 142 143
node 6 size: 96764 MB
node 6 free: 96007 MB
node 7 cpus: 40 41 42 43 44 45 46 47 168 169 170 171 172 173 174 175
node 7 size: 96747 MB
node 7 free: 95975 MB
node 8 cpus: 64 65 66 67 68 69 70 71 192 193 194 195 196 197 198 199
node 8 size: 96728 MB
node 8 free: 95921 MB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```

node 9 cpus: 96 97 98 99 100 101 102 103 224 225 226 227 228 229 230 231
node 9 size: 96763 MB
node 9 free: 96004 MB
node 10 cpus: 80 81 82 83 84 85 86 87 208 209 210 211 212 213 214 215
node 10 size: 96764 MB
node 10 free: 96004 MB
node 11 cpus: 112 113 114 115 116 117 118 119 240 241 242 243 244 245 246 247
node 11 size: 96763 MB
node 11 free: 96005 MB
node 12 cpus: 88 89 90 91 92 93 94 95 216 217 218 219 220 221 222 223
node 12 size: 96764 MB
node 12 free: 95974 MB
node 13 cpus: 120 121 122 123 124 125 126 127 248 249 250 251 252 253 254 255
node 13 size: 96763 MB
node 13 free: 95992 MB
node 14 cpus: 72 73 74 75 76 77 78 79 200 201 202 203 204 205 206 207
node 14 size: 96764 MB
node 14 free: 96000 MB
node 15 cpus: 104 105 106 107 108 109 110 111 232 233 234 235 236 237 238 239
node 15 size: 96732 MB
node 15 free: 92454 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
6:  12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10: 32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11: 32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12: 32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13: 32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11
15: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10

```

```

From /proc/meminfo
MemTotal: 1584825332 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/sbin/tuned-adm active
Current active profile: latency-performance

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
/usr/bin/lsb_release -d
Ubuntu 22.04.1 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bookworm/sid
os-release:
  PRETTY_NAME="Ubuntu 22.04.1 LTS"
  NAME="Ubuntu"
  VERSION_ID="22.04"
  VERSION="22.04.1 LTS (Jammy Jellyfish)"
  VERSION_CODENAME=jammy
  ID=ubuntu
  ID_LIKE=debian
  HOME_URL="https://www.ubuntu.com/"
```

```
uname -a:
Linux amd-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Nov 4 16:46
```

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc400-Blb
Filesystem      Type      Size  Used Avail Use% Mounted on
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2022  
Hardware Availability: Feb-2023  
Software Availability: Nov-2022

## Platform Notes (Continued)

```
tmpfs          tmpfs 130G  3.4G  127G   3% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R7625
Product Family: PowerEdge
Serial:          1234567
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 24x 80AD000080AD HMC94MEBRA109N 64 GB 2 rank 4800
```

```
BIOS:
BIOS Vendor:     Dell Inc.
BIOS Version:    1.0.2
BIOS Date:       10/17/2022
BIOS Revision:   1.0
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====
```

```
=====  
C++         | 508.namd_r(base) 510.parest_r(base)  
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2022  
Hardware Availability: Feb-2023  
Software Availability: Nov-2022

## Compiler Version Notes (Continued)

C++, C | 511.povray\_r(base) 526.blender\_r(base)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2022  
Hardware Availability: Feb-2023  
Software Availability: Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using both C and C++:  
clang++ clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Base Portability Flags (Continued)

538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1210

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6573

**Test Date:** Nov-2022

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Feb-2023

**Tested by:** Dell Inc.

**Software Availability:** Nov-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-04 16:59:08-0400.

Report generated on 2023-02-01 18:19:27 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.