



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: May-2022

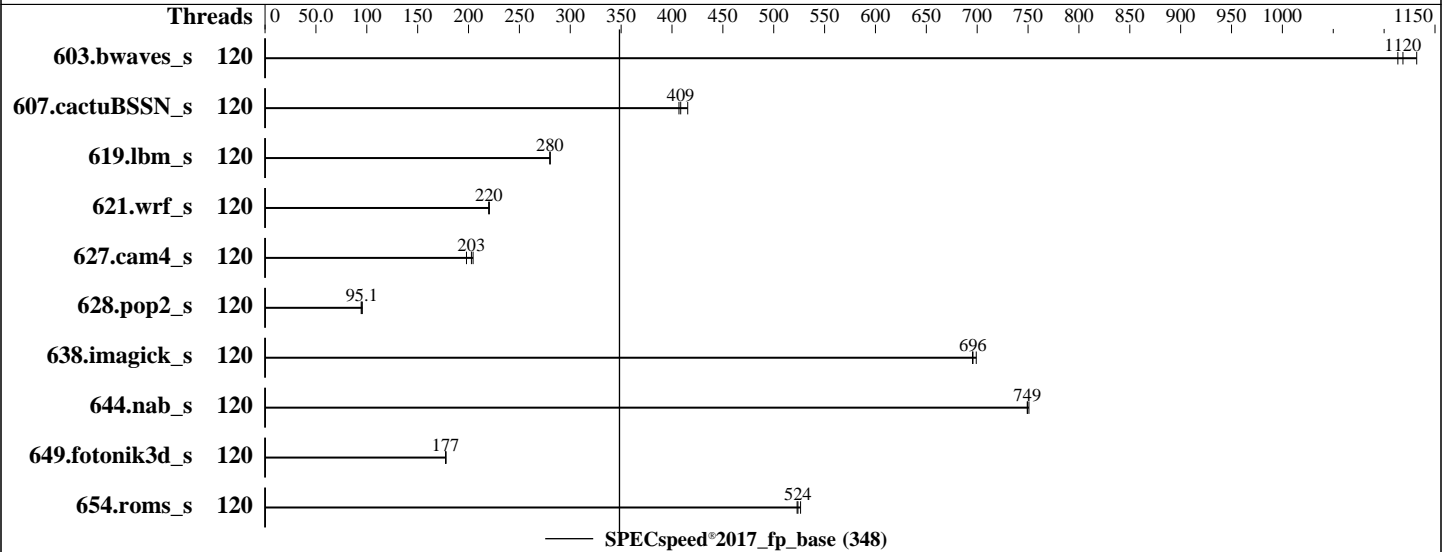

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
 Max MHz: 3500  
 Nominal: 1900  
 Enabled: 120 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 112.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x SATA SSD, 1.92TB  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for  
 D3983-A1x. Released Mar-2023  
 tested as V1.0.0.0 R0.22.1 for D3983-A1x Jan-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2023  
Hardware Availability: Mar-2023  
Software Availability: May-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	120	<u>52.7</u>	<u>1120</u>	53.0	1110	52.1	1130							
607.cactuBSSN_s	120	40.1	415	41.0	407	<u>40.8</u>	<u>409</u>							
619.lbm_s	120	18.7	280	<u>18.7</u>	<u>280</u>	18.7	280							
621.wrf_s	120	<u>60.1</u>	<u>220</u>	60.1	220	60.0	220							
627.cam4_s	120	<u>43.7</u>	<u>203</u>	43.3	204	44.8	198							
628.pop2_s	120	126	94.5	<u>125</u>	<u>95.1</u>	124	95.6							
638.imagick_s	120	<u>20.7</u>	<u>696</u>	20.6	699	20.7	695							
644.nab_s	120	23.3	749	<u>23.3</u>	<u>749</u>	23.3	751							
649.fotonik3d_s	120	<u>51.4</u>	<u>177</u>	51.4	177	51.2	178							
654.roms_s	120	30.1	523	<u>30.1</u>	<u>524</u>	29.9	526							

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2023  
Hardware Availability: Mar-2023  
Software Availability: May-2022

### General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Hyper Threading = Disabled  
DCU IP Prefetcher = Disabled  
Package C State limit = C0  
LLC Prefetch = Enabled  
DBP-F = Enabled  
CPU Performance Boost = Aggressive  
FAN Control = Full

Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Mon Jan 16 14:29:23 2023

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8490H  
2 "physical id"s (chips)  
120 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 60  
siblings : 60  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59

From lscpu from util-linux 2.37.4:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 46 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 120  
On-line CPU(s) list: 0-119  
Vendor ID: GenuineIntel  
BIOS Vendor ID: Intel(R) Corporation  
Model name: Intel(R) Xeon(R) Platinum 8490H

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** May-2022

### Platform Notes (Continued)

```

BIOS Model name: Intel(R) Xeon(R) Platinum 8490H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 60
Socket(s): 2
Stepping: 8
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsavec cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 5.6 MiB (120 instances)
L1i cache: 3.8 MiB (120 instances)
L2 cache: 240 MiB (120 instances)
L3 cache: 225 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-59
NUMA node1 CPU(s): 60-119
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2023  
Hardware Availability: Mar-2023  
Software Availability: May-2022

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

/proc/cpuinfo cache data  
cache size : 115200 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27  
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56  
57 58 59

node 0 size: 515187 MB

node 0 free: 514088 MB

node 1 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84  
85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109  
110 111 112 113 114 115 116 117 118 119

node 1 size: 516072 MB

node 1 free: 514437 MB

node distances:

node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo

MemTotal: 1056009820 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="9.0 (Plow)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="9.0"

PLATFORM\_ID="platform:el9"

PRETTY\_NAME="Red Hat Enterprise Linux 9.0 (Plow)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2023  
Hardware Availability: Mar-2023  
Software Availability: May-2022

### Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos
```

```
uname -a:
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14
12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Jan 16 14:27
```

```
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   1.7T   30G  1.7T   2% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY RX2540 M7
Product Family: SERVER
Serial:          EWCExxxxxxx
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
10x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
6x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

```
BIOS:
BIOS Vendor:     FUJITSU
BIOS Version:    V1.0.0.0 R0.22.1 for D3983-A1x
BIOS Date:       12/01/2022
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2023  
Hardware Availability: Mar-2023  
Software Availability: May-2022

### Platform Notes (Continued)

BIOS Revision: 0.22  
Firmware Revision: 2.0

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2023  
Hardware Availability: Mar-2023  
Software Availability: May-2022

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:  
icx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:  
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:  
-m64 -g -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECspeed®2017\_fp\_base = 348

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: May-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-16 14:29:23-0500.

Report generated on 2023-02-01 18:27:51 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.