



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573


Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

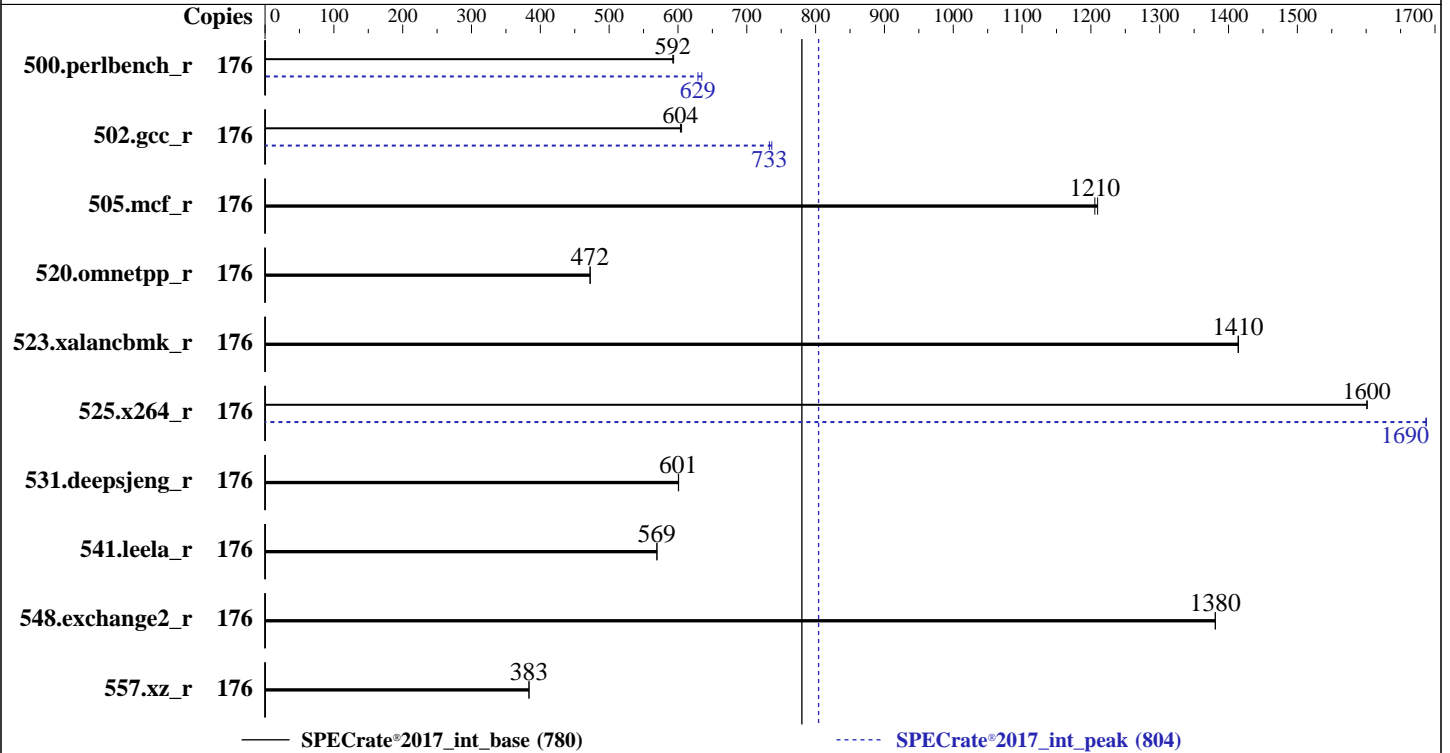

Hardware

CPU Name: Intel Xeon Platinum 8458P
 Max MHz: 3800
 Nominal: 2700
 Enabled: 88 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 82.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 1.0.1 released Dec-2022
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	176	473	592	472	594			176	441	635	445	629		
502.gcc_r	176	412	605	413	604			176	340	733	338	736		
505.mcf_r	176	236	1210	235	1210			176	236	1210	235	1210		
520.omnetpp_r	176	489	473	489	472			176	489	473	489	472		
523.xalancbmk_r	176	131	1410	131	1410			176	131	1410	131	1410		
525.x264_r	176	193	1600	192	1600			176	183	1690	183	1690		
531.deepsjeng_r	176	336	601	336	601			176	336	601	336	601		
541.leela_r	176	512	569	512	570			176	512	569	512	570		
548.exchange2_r	176	334	1380	334	1380			176	334	1380	334	1380		
557.xz_r	176	496	384	496	383			176	496	384	496	383		

SPECrate®2017_int_base = 780

SPECrate®2017_int_peak = 804

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-32"
MALLOCONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
`sync; echo 3> /proc/sys/vm/drop_caches`
 runcpu command invoked through numactl i.e.:
`numactl --interleave=all runcpu <etc>`
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
      Uncorrectable Memory Error : Disabled
      Virtualization Technology : Disabled
      Sub NUMA Cluster : 4-way Clustering
      DCU Streamer Prefetcher : Disabled
      LLC Prefetch : Disabled
      Dead Line LLC Alloc : Disabled
      Optimizer Mode : Enabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
      CLE : Disabled
      C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Fri Jan 13 12:10:46 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```

7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
12:10:46 up 36 min, 1 user, load average: 0.28, 0.08, 0.03
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1    -                11:42   30.00s  1.12s  0.00s /bin/bash ./dell-norun-specrate.sh
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124389
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 4124389
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-main.sh rate

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```

/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=176 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=88 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
--output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=176 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=88 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode rate
--tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8458P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 44
siblings       : 88
2 physical ids (chips)
176 processors (hardware threads)
physical id 0: core ids 0-43
physical id 1: core ids 0-43
physical id 0: apicids 0-87
physical id 1: apicids 128-215

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```

From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):   32-bit, 64-bit
Address sizes:     46 bits physical, 57 bits virtual
Byte Order:       Little Endian
CPU(s):           176
On-line CPU(s) list: 0-175
Vendor ID:        GenuineIntel
Model name:       Intel(R) Xeon(R) Platinum 8458P
CPU family:       6
Model:           143
Thread(s) per core: 2
Core(s) per socket: 44
Socket(s):        2
Stepping:         8
BogoMIPS:         5400.00
Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

```
L1d cache: 4.1 MiB (88 instances)
L1i cache: 2.8 MiB (88 instances)
L2 cache: 176 MiB (88 instances)
L3 cache: 165 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,88,92,96,100,104,108,112,116,120,124,128
NUMA node1 CPU(s): 44,48,52,56,60,64,68,72,76,80,84,132,136,140,144,148,152,156,160,164,168,172
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,90,94,98,102,106,110,114,118,122,126,130
NUMA node3 CPU(s): 46,50,54,58,62,66,70,74,78,82,86,134,138,142,146,150,154,158,162,166,170,174
NUMA node4 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,89,93,97,101,105,109,113,117,121,125,129
NUMA node5 CPU(s): 45,49,53,57,61,65,69,73,77,81,85,133,137,141,145,149,153,157,161,165,169,173
NUMA node6 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,91,95,99,103,107,111,115,119,123,127,131
NUMA node7 CPU(s): 47,51,55,59,63,67,71,75,79,83,87,135,139,143,147,151,155,159,163,167,171,175
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 4.1M 12 Data 1 64 1 64
L1i 32K 2.8M 8 Instruction 1 64 1 64
L2 2M 176M 16 Unified 2 2048 1 64
L3 82.5M 165M 15 Unified 3 90112 1 64
```

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,88,92,96,100,104,108,112,116,120,124,128
node 0 size: 128399 MB
node 0 free: 127164 MB
node 1 cpus: 44,48,52,56,60,64,68,72,76,80,84,132,136,140,144,148,152,156,160,164,168,172
node 1 size: 129018 MB
node 1 free: 128770 MB
node 2 cpus: 2,6,10,14,18,22,26,30,34,38,42,90,94,98,102,106,110,114,118,122,126,130
node 2 size: 129018 MB
node 2 free: 128745 MB
node 3 cpus: 46,50,54,58,62,66,70,74,78,82,86,134,138,142,146,150,154,158,162,166,170,174
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```

node 3 size: 129018 MB
node 3 free: 121334 MB
node 4 cpus: 1,5,9,13,17,21,25,29,33,37,41,89,93,97,101,105,109,113,117,121,125,129
node 4 size: 129018 MB
node 4 free: 128842 MB
node 5 cpus: 45,49,53,57,61,65,69,73,77,81,85,133,137,141,145,149,153,157,161,165,169,173
node 5 size: 128983 MB
node 5 free: 128823 MB
node 6 cpus: 3,7,11,15,19,23,27,31,35,39,43,91,95,99,103,107,111,115,119,123,127,131
node 6 size: 129018 MB
node 6 free: 128850 MB
node 7 cpus: 47,51,55,59,63,67,71,75,79,83,87,135,139,143,147,151,155,159,163,167,171,175
node 7 size: 128644 MB
node 7 free: 128499 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10  12  12  12  21  21  21  21
 1:  12  10  12  12  21  21  21  21
 2:  12  12  10  12  21  21  21  21
 3:  12  12  12  10  21  21  21  21
 4:  21  21  21  21  10  12  12  12
 5:  21  21  21  21  12  10  12  12
 6:  21  21  21  21  12  12  10  12
 7:  21  21  21  21  12  12  12  10

```

```

9. /proc/meminfo
   MemTotal:      1055866224 kB

```

```

10. who -r
    run-level 3 Jan 13 11:34

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target   Status
    multi-user       running

```

```

12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         apparmor auditd cron firewalld getty@ haveged irqbalance issue-generator kbdsettings kdump
                   kdump-early postfix purge-kernels rollback sshd wicked wickedd-auto4 wickedd-dhcp4
                   wickedd-dhcp6 wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled        boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables
                   grub2-once haveged-switch-root issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rdisc
                   rpcbind rpmconfigcheck rsyncd serial-getty@ systemd-boot-check-no-failures
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
    indirect        wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=1d1balla-5385-4a23-a056-33a765172fa4
    splash=silent
    mitigations=auto
    quiet
    security=apparmor
    crashkernel=327M,high

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

crashkernel=72M,low

14. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              60
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

```

15. /sys/kernel/mm/transparent_hugepage

```

defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

16. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                1
max_ptes_none        511
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000

```

17. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

18. Disk information

```

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
Filesystem      Type  Size Used Avail Use% Mounted on
tmpfs           tmpfs 125G  3.7G 122G   3% /mnt/ramdisk

```

19. /sys/devices/virtual/dmi/id

```

Vendor:      Dell Inc.
Product:     PowerEdge MX760c
Product Family: PowerEdge
Serial:      SL6M702

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Platform Notes (Continued)

20. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
5x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
1x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.0.1
BIOS Date: 12/27/2022
BIOS Revision: 1.0

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Compiler Version Notes (Continued)

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallo

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fltto
-mfpmath=sse -funroll-loops -gopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

502.gcc_r: -m32

```
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemallocc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 780

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_int_peak = 804

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-13 12:10:46-0500.

Report generated on 2024-01-29 17:21:18 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-01.