



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11


(3.85 GHz, AMD EPYC 9374F)

**SPECspeed®2017\_fp\_base = 246**

**SPECspeed®2017\_fp\_peak = 249**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

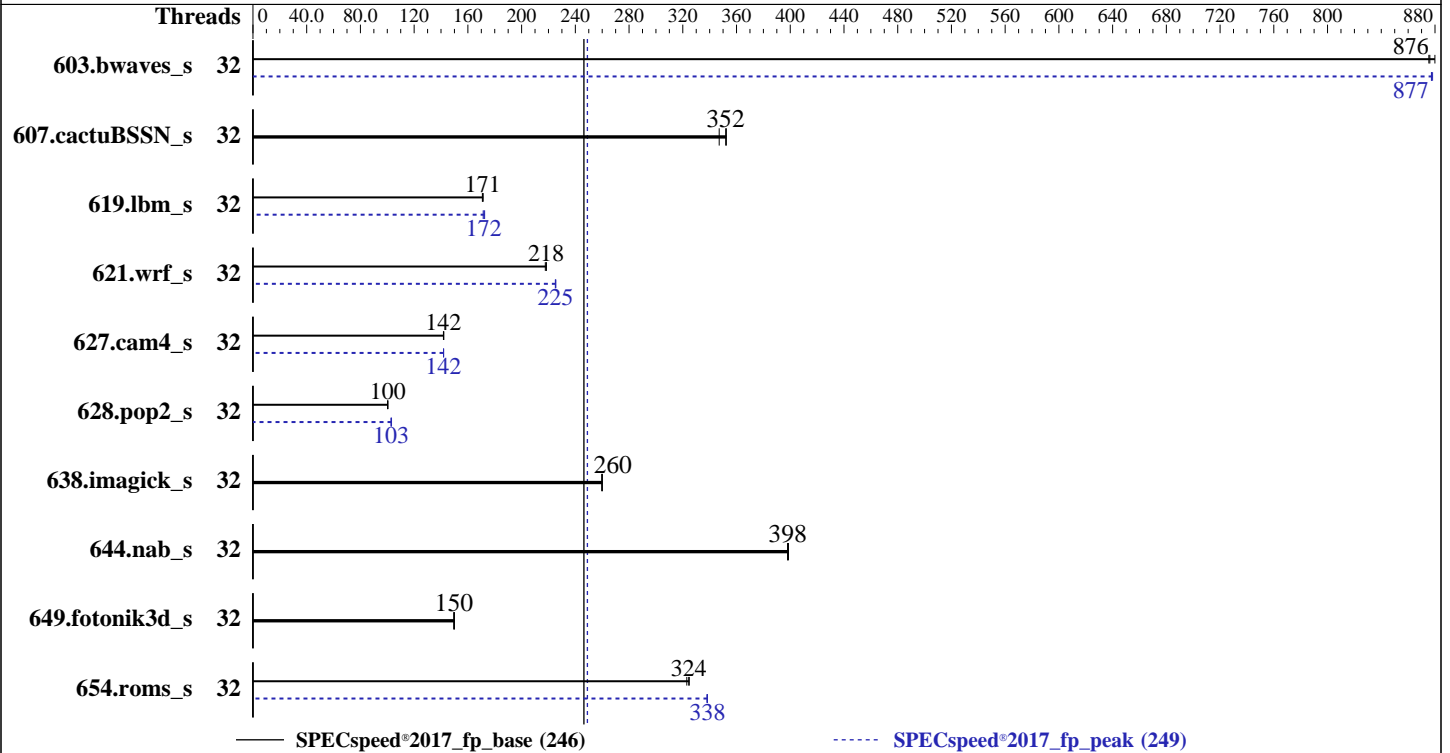

### Hardware

CPU Name: AMD EPYC 9374F  
 Max MHz: 4300  
 Nominal: 3850  
 Enabled: 32 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 4 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 1.6 TB NVMe SSD, RAID 0  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.12 11/24/2022 released  
 Nov-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2023  
Hardware Availability: Dec-2022  
Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	67.0	880	67.4	875	<b>67.3</b>	<b>876</b>	32	<b>67.2</b>	<b>877</b>	67.2	877	67.2	878
607.cactuBSSN_s	32	<b>47.4</b>	<b>352</b>	47.3	352	48.0	347	32	<b>47.4</b>	<b>352</b>	47.3	352	48.0	347
619.lbm_s	32	30.7	171	<b>30.6</b>	<b>171</b>	30.6	171	32	30.6	171	30.4	172	<b>30.5</b>	<b>172</b>
621.wrf_s	32	60.6	218	60.8	218	<b>60.6</b>	<b>218</b>	32	58.7	225	<b>58.7</b>	<b>225</b>	58.7	226
627.cam4_s	32	62.4	142	62.5	142	<b>62.5</b>	<b>142</b>	32	<b>62.5</b>	<b>142</b>	62.5	142	62.5	142
628.pop2_s	32	118	100	118	100	<b>118</b>	<b>100</b>	32	<b>115</b>	<b>103</b>	115	103	116	103
638.imagick_s	32	<b>55.5</b>	<b>260</b>	55.5	260	55.6	260	32	<b>55.5</b>	<b>260</b>	55.5	260	55.6	260
644.nab_s	32	43.9	398	<b>43.9</b>	<b>398</b>	43.8	399	32	43.9	398	<b>43.9</b>	<b>398</b>	43.8	399
649.fotonik3d_s	32	<b>60.9</b>	<b>150</b>	60.8	150	61.0	149	32	<b>60.9</b>	<b>150</b>	60.8	150	61.0	149
654.roms_s	32	48.7	323	<b>48.5</b>	<b>324</b>	48.5	325	32	<b>46.5</b>	<b>338</b>	46.6	338	46.5	338

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To always enable THP for peak runs of:  
603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.  
To disable THP for peak runs of 621.wrf\_s:  
'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.  
To enable THP only on request for peak runs of 654.roms\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-31"  
LD\_LIBRARY\_PATH = "/home/CPU2017/amd\_speed\_aocc400\_genoa\_B\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "32"

Environment variables set by runcpu during the 603.bwaves\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 619.lbm\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 627.cam4\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 654.roms\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 16 1 17 2 18 3 19 4 20 5 21 6 22 7 23 8 24 9 25 10 26  
11 27 12 28 13 29 14 30 15 31"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Memory PStates set to Disabled

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0x0A10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L6

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Thu Apr 7 05:31:27 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 9374F 32-Core Processor

1 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9374F 32-Core Processor
BIOS Model name:       AMD EPYC 9374F 32-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              1
Stepping:               1
Frequency boost:        enabled
CPU max MHz:           4304.9312
CPU min MHz:           1500.0000
BogoMIPS:               7688.60
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
                        pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                        pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
                        aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                        misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
                        bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
                        ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                        avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
                        lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                        pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                        rdpid overflow_recov succor smca fsrm flush_lld
Virtualization:         AMD-V
L1d cache:              1 MiB (32 instances)
L1i cache:              1 MiB (32 instances)
L2 cache:               32 MiB (32 instances)
L3 cache:               256 MiB (8 instances)
NUMA node(s):           8
NUMA node0 CPU(s):     0-3
NUMA node1 CPU(s):     16-19
NUMA node2 CPU(s):     8-11
NUMA node3 CPU(s):     24-27
NUMA node4 CPU(s):     12-15

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

```

NUMA node5 CPU(s):          28-31
NUMA node6 CPU(s):          4-7
NUMA node7 CPU(s):          20-23
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data

cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3
node 0 size: 48100 MB
node 0 free: 47764 MB
node 1 cpus: 16 17 18 19
node 1 size: 48382 MB
node 1 free: 48171 MB
node 2 cpus: 8 9 10 11
node 2 size: 48382 MB
node 2 free: 48222 MB
node 3 cpus: 24 25 26 27
node 3 size: 48382 MB
node 3 free: 48197 MB
node 4 cpus: 12 13 14 15
node 4 size: 48382 MB
node 4 free: 48244 MB
node 5 cpus: 28 29 30 31
node 5 size: 48334 MB
node 5 free: 48217 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

```

node 6 cpus: 4 5 6 7
node 6 size: 48382 MB
node 6 free: 48248 MB
node 7 cpus: 20 21 22 23
node 7 size: 48382 MB
node 7 free: 48273 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10  11  11  11  11  11  11  11
 1:  11  10  11  11  11  11  11  11
 2:  11  11  10  11  11  11  11  11
 3:  11  11  11  10  11  11  11  11
 4:  11  11  11  11  10  11  11  11
 5:  11  11  11  11  11  10  11  11
 6:  11  11  11  11  11  11  10  11
 7:  11  11  11  11  11  11  11  10

```

From /proc/meminfo

MemTotal: 396014316 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="9.0 (Plow)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="9.0"

PLATFORM\_ID="platform:el9"

PRETTY\_NAME="Red Hat Enterprise Linux 9.0 (Plow)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)

system-release: Red Hat Enterprise Linux release 9.0 (Plow)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:9::baseos

uname -a:

Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Apr 7 05:30

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	23G	796G	3%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL345 Gen11
Product Family: ProLiant
Serial:          DL345G11-004

```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  12x Hynix HMC88MEBRA113N 32 GB 2 rank 4800

```

```

BIOS:
  BIOS Vendor:      HPE
  BIOS Version:     1.12
  BIOS Date:        11/24/2022
  BIOS Revision:    1.12
  Firmware Revision: 1.10

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
654.roms\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
628.pop2\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

```

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_fp\_base = 246

SPECspeed®2017\_fp\_peak = 249

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

628.pop2\_s (continued):

```
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-06 20:01:27-0400.

Report generated on 2023-02-15 10:34:28 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.