



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation


SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Sep-2021  
Hardware Availability: Jul-2021  
Software Availability: Dec-2020

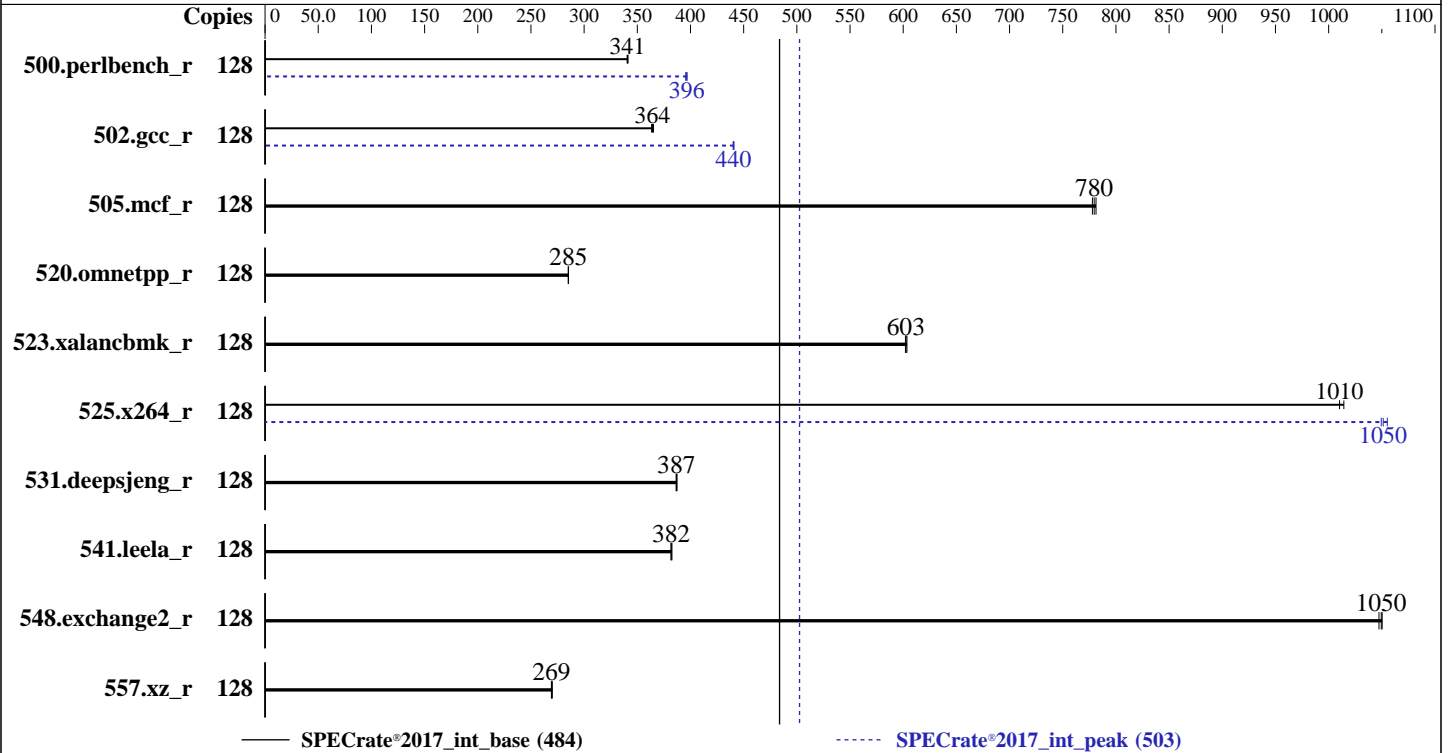

### Hardware

CPU Name: Intel Xeon Platinum 8358  
Max MHz: 3400  
Nominal: 2600  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 48 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 800 GB SAS SSD, RAID 0  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86\_64  
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
Parallel: No  
Firmware: NEC BIOS Version U46 v1.40 04/28/2021 released Jul-2021  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Sep-2021  
Hardware Availability: Jul-2021  
Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>598</b>	<b>341</b>	598	340	597	341	128	<b>514</b>	<b>396</b>	515	395	514	397
502.gcc_r	128	499	363	<b>498</b>	<b>364</b>	496	365	128	411	441	412	440	<b>411</b>	<b>440</b>
505.mcf_r	128	266	778	<b>265</b>	<b>780</b>	265	781	128	266	778	<b>265</b>	<b>780</b>	265	781
520.omnetpp_r	128	589	285	<b>589</b>	<b>285</b>	589	285	128	589	285	<b>589</b>	<b>285</b>	589	285
523.xalancbmk_r	128	224	604	224	602	<b>224</b>	<b>603</b>	128	224	604	224	602	<b>224</b>	<b>603</b>
525.x264_r	128	222	1010	221	1010	<b>222</b>	<b>1010</b>	128	212	1060	214	1050	<b>213</b>	<b>1050</b>
531.deepsjeng_r	128	<b>379</b>	<b>387</b>	380	387	379	387	128	<b>379</b>	<b>387</b>	380	387	379	387
541.leela_r	128	554	383	<b>555</b>	<b>382</b>	555	382	128	554	383	<b>555</b>	<b>382</b>	555	382
548.exchange2_r	128	319	1050	320	1050	<b>320</b>	<b>1050</b>	128	319	1050	320	1050	<b>320</b>	<b>1050</b>
557.xz_r	128	<b>513</b>	<b>269</b>	512	270	514	269	128	<b>513</b>	<b>269</b>	512	270	514	269

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = 503

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Sep-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical software and/or firmware described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>  
This measured result may not be representative of the result that would be measured were this benchmark run with software and firmware available as of the publication date.

Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from [jemalloc.net](http://jemalloc.net) or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Settings:  
Thermal Configuration: Maximum Cooling  
Workload Profile: General Throughput Compute  
Advanced Memory Protection: Advanced ECC Support  
Memory Patrol Scrubbing: Disabled  
Minimum Processor Idle Power Core C-State: C6 State  
LLC Dead Line Allocation: Disabled  
Enhanced Processor Performance: Enabled  
XPT Prefetcher: Enabled  
Intel UPI Link Enablement: Single Link Operation  
Intel UPI Link Frequency: Min UPI Speed  
Direct To UPI (D2K): Disabled  
Workload Profile: Custom  
Adjacent Sector Prefetch: Disabled  
DCU Stream Prefetcher: Disabled  
Intel UPI Link Power Management: Enabled  
Energy Efficient Turbo: Enabled

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Sep-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on r120ilm Thu Sep 2 10:13:50 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8358 CPU @ 2.60GHz  
2 "physical id"s (chips)  
128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 32  
siblings : 64  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

From lscpu from util-linux 2.32.1:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 128  
On-line CPU(s) list: 0-127  
Thread(s) per core: 2  
Core(s) per socket: 32  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 106  
Model name: Intel(R) Xeon(R) Platinum 8358 CPU @ 2.60GHz  
Stepping: 6  
CPU MHz: 2959.306  
BogoMIPS: 5200.00  
Virtualization: VT-x  
L1d cache: 48K  
L1i cache: 32K  
L2 cache: 1280K  
L3 cache: 49152K  
NUMA node0 CPU(s): 0-15,64-79  
NUMA node1 CPU(s): 16-31,80-95  
NUMA node2 CPU(s): 32-47,96-111  
NUMA node3 CPU(s): 48-63,112-127

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Sep-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 invpcid\_single ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid md\_clear pconfig flush\_lld arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 49152 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79

node 0 size: 250829 MB

node 0 free: 257079 MB

node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95

node 1 size: 251208 MB

node 1 free: 257377 MB

node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111

node 2 size: 251450 MB

node 2 free: 257657 MB

node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127

node 3 size: 251086 MB

node 3 free: 257733 MB

node distances:

```
node  0  1  2  3
  0:  10  20  30  30
  1:  20  10  30  30
  2:  30  30  10  20
  3:  30  30  20  10
```

From /proc/meminfo

MemTotal: 1056509492 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Sep-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
Linux r120ilm 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64 x86_64
x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):           Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                           Bypass disabled via prctl and
                                           seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs
                                           barriers and __user pointer
                                           sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Enhanced IBRS, IBPB:
                                           conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Sep 2 10:12

SPEC is set to: /home/cpu2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda3       ext4  724G  171G  516G  25% /

From /sys/devices/virtual/dmi/id
Vendor:           NEC

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Sep-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

Product: Express5800/R120i-1M  
Product Family: Express5800  
Serial: CN70450X8H

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
32x Hynix HMA84GR7CJR4N-XN 32 GB 2 rank 3200

BIOS:  
BIOS Vendor: NEC  
BIOS Version: U46  
BIOS Date: 04/28/2021  
BIOS Revision: 1.40  
Firmware Revision: 2.44

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 500.perlbench\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Sep-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Compiler Version Notes (Continued)

=====  
C | 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Sep-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Compiler Version Notes (Continued)

Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

### Base Portability Flags

500.perlbenc\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Sep-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Dec-2020

## Base Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Sep-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_int\_base = 484

Express5800/R120i-1M (Intel Xeon Platinum 8358)

SPECrate®2017\_int\_peak = 503

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Sep-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120i-RevE.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120i-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-01 21:13:50-0400.

Report generated on 2023-03-02 11:14:58 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-28.