



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix


SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

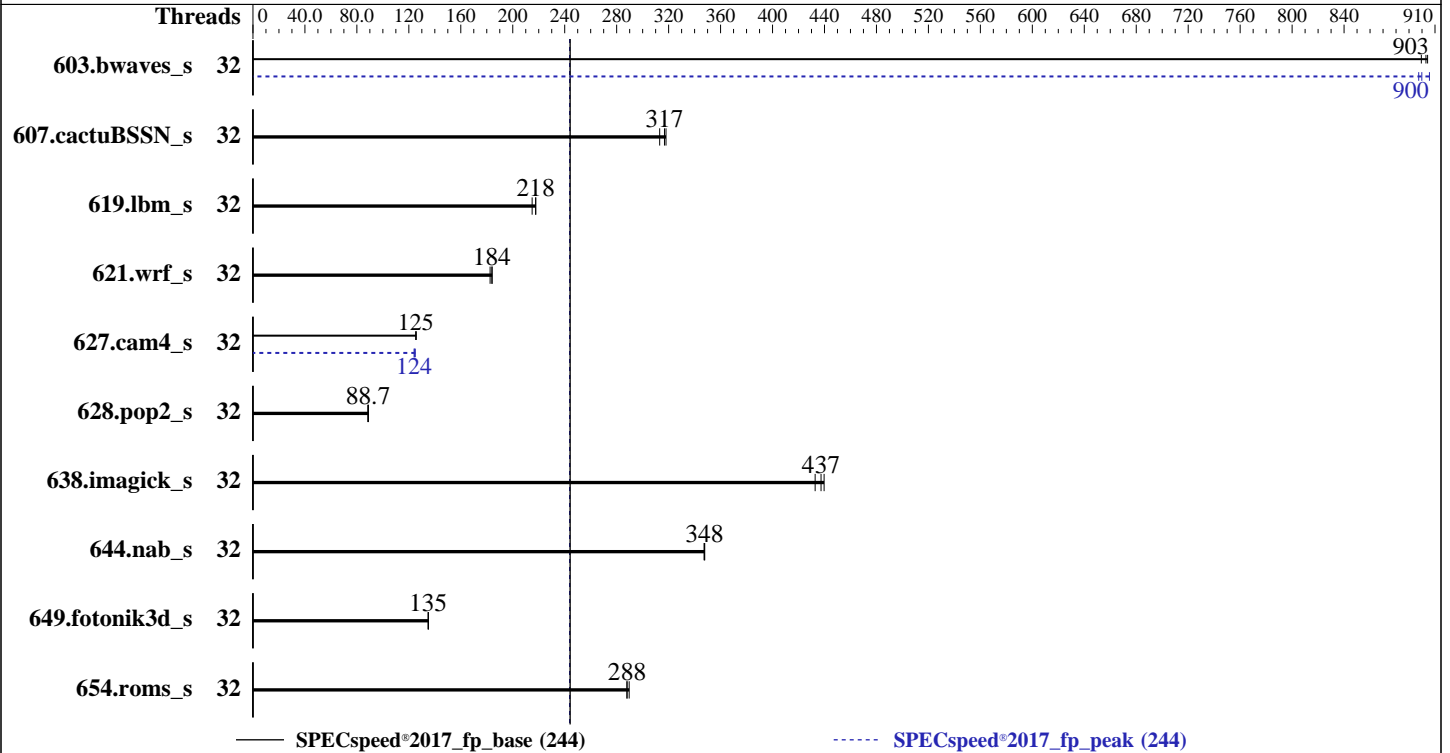

### Hardware

CPU Name: Intel Xeon Gold 6426Y  
Max MHz: 4100  
Nominal: 2500  
Enabled: 32 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 37.5 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 960 GB NVME SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
5.14.21-150400.22-default  
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
Compiler Build for Linux;  
Fortran: Version 2022.1 of Intel Fortran Compiler  
Build for Linux;  
Parallel: Yes  
Firmware: Nettrix BIOS Version NNH1041018-U00-1 released  
Nov-2022  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost  
of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECSpeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECSpeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	65.6	899	65.2	904	<b>65.3</b>	<b>903</b>	32	65.7	897	65.1	906	<b>65.6</b>	<b>900</b>
607.cactuBSSN_s	32	53.2	313	52.4	318	<b>52.6</b>	<b>317</b>	32	53.2	313	52.4	318	<b>52.6</b>	<b>317</b>
619.lbm_s	32	<b>24.1</b>	<b>218</b>	24.4	215	24.1	218	32	<b>24.1</b>	<b>218</b>	24.4	215	24.1	218
621.wrf_s	32	71.8	184	<b>71.9</b>	<b>184</b>	72.4	183	32	71.8	184	<b>71.9</b>	<b>184</b>	72.4	183
627.cam4_s	32	<b>70.6</b>	<b>125</b>	70.7	125	70.6	126	32	71.4	124	70.9	125	<b>71.3</b>	<b>124</b>
628.pop2_s	32	134	88.9	<b>134</b>	<b>88.7</b>	134	88.5	32	134	88.9	<b>134</b>	<b>88.7</b>	134	88.5
638.imagick_s	32	32.8	440	33.3	433	<b>33.0</b>	<b>437</b>	32	32.8	440	33.3	433	<b>33.0</b>	<b>437</b>
644.nab_s	32	50.3	347	50.2	348	<b>50.2</b>	<b>348</b>	32	50.3	347	50.2	348	<b>50.2</b>	<b>348</b>
649.fotonik3d_s	32	67.5	135	<b>67.6</b>	<b>135</b>	67.6	135	32	67.5	135	<b>67.6</b>	<b>135</b>	67.6	135
654.roms_s	32	<b>54.7</b>	<b>288</b>	54.4	290	54.7	288	32	<b>54.7</b>	<b>288</b>	54.4	290	54.7	288

SPECSpeed®2017\_fp\_base = **244**

SPECSpeed®2017\_fp\_peak = **244**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/lijq/lib/intel64:/home/lijq/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECSpeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECSpeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

## General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

- Enable LP [Global] set to Single LP
- LLC Prefetch set to Enabled
- SNC (Sub NUMA) set to Disabled
- Patrol Scrub set to Disabled
- LLC dead line alloc set to Disabled
- XPT Prefetch set to Enabled
- KTI Prefetch set to Disabled
- DCU Streamer Prefetcher set to Disabled
- Hardware P-States set to Native Mode

Sysinfo program /home/lijq/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Feb 8 11:24:13 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Feb-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

23. BIOS

1. `uname -a`

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

2. `w`

```
11:24:13 up 1:09, 1 user, load average: 0.05, 5.13, 10.77
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      pts/0    10.2.48.216   10:22       37.00s     0.96s    0.00s    -bash
```

3. Username

```
From environment variable $USER: root
```

4. `ulimit -a`

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4125307
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125307
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. `sysinfo process ancestry`

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 32
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags -c
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=32 --tune base,peak -o all --define drop_caches
fpspeed
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Feb-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

```
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=32 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.057/templogs/preenv.fpspeed.057.0.log --lognum 057.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/lijq
```

```
-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Gold 6426Y
   vendor_id       : GenuineIntel
   cpu family      : 6
   model           : 143
   stepping        : 8
   microcode       : 0x2b000111
   bugs            : spectre_v1 spectre_v2 spec_store_bypass swappg
   cpu cores       : 16
   siblings        : 16
   2 physical ids (chips)
   32 processors (hardware threads)
   physical id 0: core ids 0-15
   physical id 1: core ids 0-15
   physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
   physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Gold 6426Y
CPU family:            6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):             2
Stepping:              8
CPU max MHz:           4100.0000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

### Platform Notes (Continued)

```

CPU min MHz:          800.0000
BogoMIPS:             5000.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                    vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                    x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                    abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                    intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                    flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                    erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                    hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                    avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                    avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                    amx_tile flush_llc arch_capabilities

Virtualization:      VT-x
L1d cache:           1.5 MiB (32 instances)
L1i cache:           1 MiB (32 instances)
L2 cache:            64 MiB (32 instances)
L3 cache:            75 MiB (2 instances)
NUMA node(s):        2
NUMA node0 CPU(s):  0-15
NUMA node1 CPU(s):  16-31
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort:  Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	37.5M	75M	15	Unified	3	40960	1	64

8. numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Feb-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-15
node 0 size: 515611 MB
node 0 free: 512208 MB
node 1 cpus: 16-31
node 1 size: 515737 MB
node 1 free: 514689 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

9. /proc/meminfo  
MemTotal: 1056101200 kB

10. who -r  
run-level 3 Feb 8 10:14

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings kdump kdump-early nvme-fc-boot-connections postfix purge-kernels rollback sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell exchange-bmc-os-info grub2-once haveged-switch-root ipmievd issue-add-ssh-keys kexec-load nfs nfs-blkmap nvme-autoconnect rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=3da31185-cc2a-4a7c-b38c-37a409ad06ed  
splash=silent  
mitigations=auto  
quiet

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Feb-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

```
security=apparmor
crashkernel=300M,high
crashkernel=72M,low
```

-----  
14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

-----  
15. tuned-adm active

```
Current active profile: latency-performance
```

-----  
16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   900
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

-----  
17. /sys/kernel/mm/transparent\_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

## Platform Notes (Continued)

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs    60000
   defrag                    1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan              4096
   scan_sleep_millisecs      10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
   SPEC is set to: /home/lijq
   Filesystem      Type      Size    Used Avail Use% Mounted on
   /dev/nvme0nlp3  btrfs    928G    133G  796G  15% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:          Nettrix
   Product:         R620 G50 LP
   Product Family:  Rack
   Serial:          6101823603509646

```

```

-----
22. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

```

-----
23. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      American Megatrends International, LLC.
   BIOS Version:     NNH1041018-U00-1
   BIOS Date:        11/01/2022
   BIOS Revision:    5.29

```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)  
=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)  
=====

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: basepeak = yes
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 244

R620 G50 LP (Intel Xeon Gold 6426Y, 2.50 GHz)

SPECspeed®2017\_fp\_peak = 244

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Feb-2023  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

## Peak Optimization Flags (Continued)

603.bwaves\_s: -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-07 22:24:12-0500.  
Report generated on 2023-03-02 11:19:58 by CPU2017 PDF formatter v6442.  
Originally published on 2023-02-28.