



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303
SPECrate®2017_int_peak = 314

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Apr-2022

Software Availability: Dec-2022

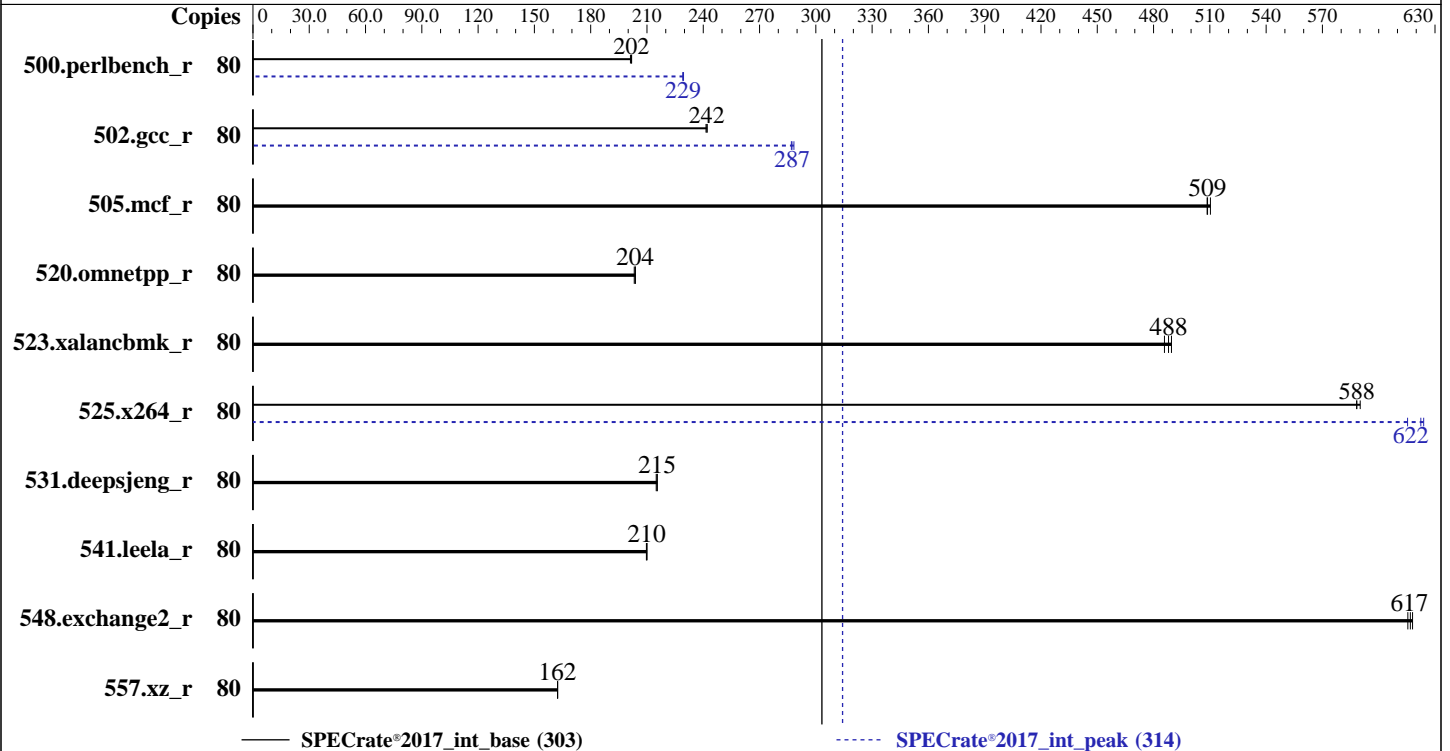

Hardware

CPU Name: Intel Xeon Silver 4316
 Max MHz: 3400
 Nominal: 2300
 Enabled: 40 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 1 x 1 TB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.25.1.el8_4.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 0802 released Apr-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303

SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	631	202	631	202	633	201	80	555	229	556	229	555	229
502.gcc_r	80	468	242	468	242	469	241	80	395	287	393	288	394	287
505.mcf_r	80	254	509	253	510	254	509	80	254	509	253	510	254	509
520.omnetpp_r	80	516	203	515	204	515	204	80	516	203	515	204	515	204
523.xalancbmk_r	80	173	490	173	488	174	486	80	173	490	173	488	174	486
525.x264_r	80	238	588	238	588	237	590	80	228	615	224	624	225	622
531.deepsjeng_r	80	427	215	426	215	426	215	80	427	215	426	215	426	215
541.leela_r	80	631	210	632	210	631	210	80	631	210	632	210	631	210
548.exchange2_r	80	341	616	339	618	340	617	80	341	616	339	618	340	617
557.xz_r	80	532	162	532	162	532	162	80	532	162	532	162	532	162

SPECrate®2017_int_base = **303**

SPECrate®2017_int_peak = **314**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/ic23/lib/intel64:/home/ic23/lib/ia32:/home/ic23/je5.0.1-32"
MALLOCONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303

SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
VT-d = Disabled
Patrol Scrub = Disabled
SNC = Enable SNC2 (2-clusters)
Engine Boost = Aggressive
SR-IOV Support = Disabled
BMC Configuration:
Fan mode = Full speed mode

Sysinfo program /home/ic23/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Mar 2 22:35:15 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-45.el8_4.3)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303

SPECrate®2017_int_peak = 314

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Apr-2022

Software Availability: Dec-2022

Platform Notes (Continued)

- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
Linux localhost.localdomain 4.18.0-305.25.1.el8_4.x86_64 #1 SMP Mon Oct 18 14:34:11 EDT 2021 x86_64 x86_64
x86_64 GNU/Linux
-----
```

```
-----
2. w
 22:35:15 up 17:31,  1 user,  load average: 17.45, 42.90, 60.26
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1    -                05:04   17:30m 1.14s  0.01s /bin/bash ./rate.sh
-----
```

```
-----
3. Username
From environment variable $USER:  root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126683
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126683
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=80 -c
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=40 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=80 --configfile
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=40 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.039/templogs/preenv.intrate.039.0.log --lognum 039.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/ic23
-----
```

```
-----
6. /proc/cpuinfo
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303

SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

Platform Notes (Continued)

```
model name      : Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz
vendor_id       : GenuineIntel
cpu family      : 6
model           : 106
stepping        : 6
microcode       : 0xd000331
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 20
siblings        : 40
2 physical ids (chips)
80 processors (hardware threads)
physical id 0:  core ids 0-19
physical id 1:  core ids 0-19
physical id 0:  apicids 0-39
physical id 1:  apicids 64-103
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            80
On-line CPU(s) list: 0-79
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s):         2
NUMA node(s):     4
Vendor ID:        GenuineIntel
BIOS Vendor ID:   Intel
CPU family:       6
Model:            106
Model name:       Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz
BIOS Model name:  Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz
Stepping:        6
CPU MHz:          800.143
CPU max MHz:      3400.0000
CPU min MHz:      800.0000
BogoMIPS:         4600.00
Virtualization:   VT-x
L1d cache:        48K
L1i cache:        32K
L2 cache:         1280K
L3 cache:         30720K
NUMA node0 CPU(s): 0-9,40-49
NUMA node1 CPU(s): 10-19,50-59
NUMA node2 CPU(s): 20-29,60-69
NUMA node3 CPU(s): 30-39,70-79
Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303

SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

Platform Notes (Continued)

xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_lld arch_capabilities

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-9,40-49
node 0 size: 257582 MB
node 0 free: 256386 MB
node 1 cpus: 10-19,50-59
node 1 size: 258043 MB
node 1 free: 257222 MB
node 2 cpus: 20-29,60-69
node 2 size: 258043 MB
node 2 free: 257219 MB
node 3 cpus: 30-39,70-79
node 3 size: 258041 MB
node 3 free: 257301 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10
```

9. /proc/meminfo

```
MemTotal: 1056471760 kB
```

10. who -r

```
run-level 3 Mar 2 05:04
```

11. Systemd service manager version: systemd 239 (239-45.el8_4.3)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd
crond firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump
libstoragemgmt lm_sensors loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
nvme-fc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd
sssd syslog sysstat timedatex tuned udisks2 vdo
disabled arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables fancontrol
grafana-server iprump iprinit iprupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon nftables
nis-domainname nvmmf-autoconnect oddjobd pmfind pmie_check pmlogger_check pmlogger_daily_report
pmlogger_daily_report-poll pmproxy podman-auto-update postfix powertop psacct ras-mc-ctl
rasdaemon rdisc rhcd rhsm rhsm-facts rrdcached saslauthd serial-getty@ sshd-keygen@
systemd-resolved tcsd
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated
```

13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303

SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

Platform Notes (Continued)

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-305.25.1.el8_4.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
Current active profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    0
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303

SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

Platform Notes (Continued)

19. OS release

```
-----
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 8.4 (Ootpa)
redhat-release  Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release  Red Hat Enterprise Linux release 8.4 (Ootpa)
-----
```

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

```
-----
itlb_multihit      Not affected
lltf                Not affected
mds                 Not affected
meltdown            Not affected
spec_store_bypass  Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1          Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2          Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds               Not affected
tsx_async_abort     Not affected
-----
```

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information

```
-----
SPEC is set to: /home/ic23
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   878G 124G  755G  15% /home
-----
```

22. /sys/devices/virtual/dmi/id

```
-----
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS720-E10-RS12
Product Family:  Server
Serial:          012345678901
-----
```

23. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2666

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
-----
BIOS Vendor:      American Megatrends Inc.
BIOS Version:     0802
BIOS Date:        04/29/2022
BIOS Revision:    8.2
-----
```

Compiler Version Notes

```
=====
C | 502.gcc_r(peak)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303
SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303
SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303

SPECrate®2017_int_peak = 314

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Apr-2022

Software Availability: Dec-2022

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017_int_base = 303
SPECrate®2017_int_peak = 314

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Apr-2022
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes
523.xalancbmk_r: basepeak = yes
531.deepsjeng_r: basepeak = yes
541.leela_r: basepeak = yes

Fortran benchmarks:
548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>
<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-02 22:35:15-0500.
Report generated on 2024-01-29 17:26:44 by CPU2017 PDF formatter v6716.
Originally published on 2023-03-28.