



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

**SPECrate®2017\_int\_base = 313**  
**SPECrate®2017\_int\_peak = 325**

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2023

Hardware Availability: Apr-2022

Software Availability: Dec-2022

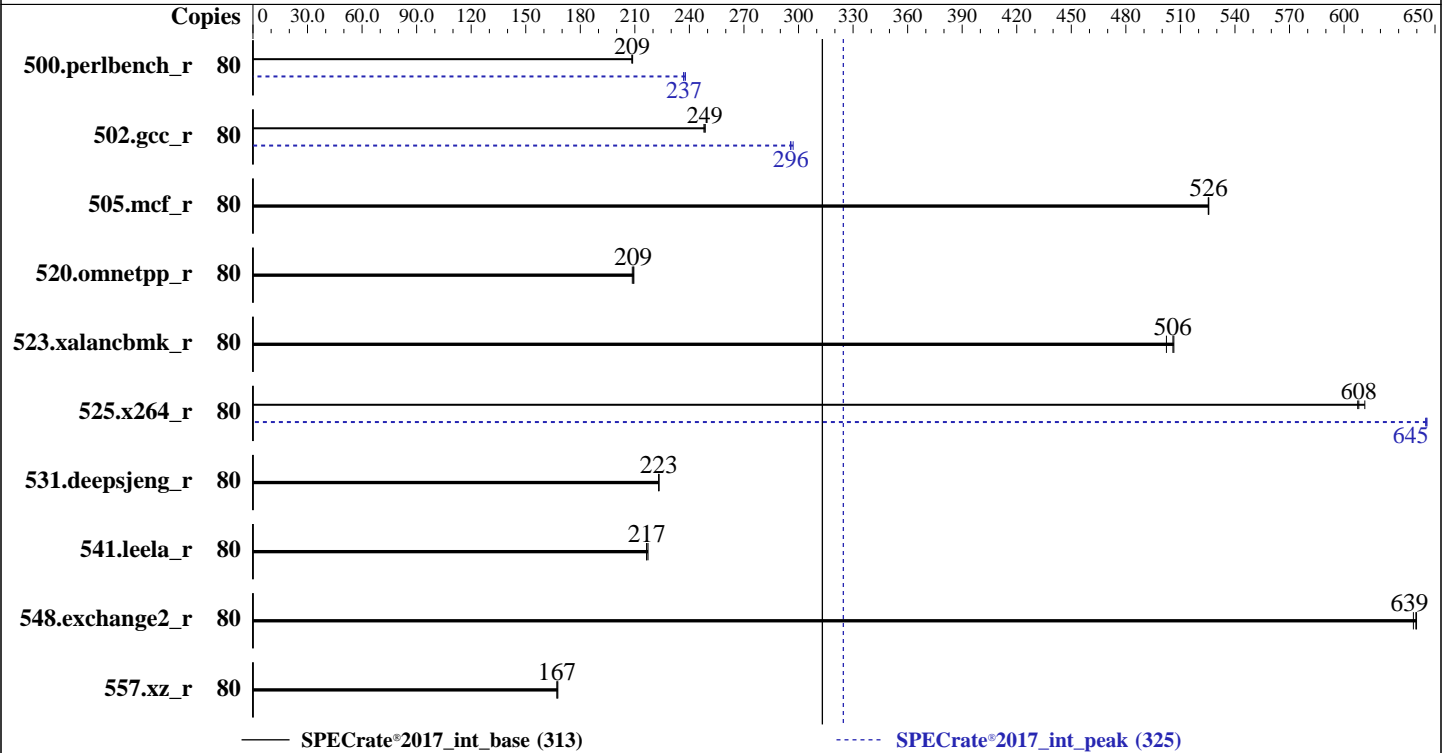

### Hardware

CPU Name: Intel Xeon Gold 5320T  
 Max MHz: 3500  
 Nominal: 2300  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.25.1.el8\_4.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 0802 released Apr-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313

SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	<b>611</b>	<b>209</b>	610	209	611	208	80	538	237	535	238	<b>537</b>	<b>237</b>
502.gcc_r	80	<b>456</b>	<b>249</b>	457	248	456	249	80	383	296	381	297	<b>383</b>	<b>296</b>
505.mcf_r	80	246	525	<b>246</b>	<b>526</b>	246	526	80	246	525	<b>246</b>	<b>526</b>	246	526
520.omnetpp_r	80	<b>502</b>	<b>209</b>	501	209	503	209	80	<b>502</b>	<b>209</b>	501	209	503	209
523.xalancbmk_r	80	167	506	168	502	<b>167</b>	<b>506</b>	80	167	506	168	502	<b>167</b>	<b>506</b>
525.x264_r	80	231	608	229	611	<b>230</b>	<b>608</b>	80	217	645	217	646	<b>217</b>	<b>645</b>
531.deepsjeng_r	80	411	223	<b>411</b>	<b>223</b>	411	223	80	411	223	<b>411</b>	<b>223</b>	411	223
541.leela_r	80	612	216	610	217	<b>612</b>	<b>217</b>	80	612	216	610	217	<b>612</b>	<b>217</b>
548.exchange2_r	80	328	640	<b>328</b>	<b>639</b>	328	638	80	328	640	<b>328</b>	<b>639</b>	328	638
557.xz_r	80	517	167	515	168	<b>517</b>	<b>167</b>	80	517	167	515	168	<b>517</b>	<b>167</b>

SPECrate®2017\_int\_base = **313**

SPECrate®2017\_int\_peak = **325**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/ic23/lib/intel64:/home/ic23/lib/ia32:/home/ic23/je5.0.1-32"  
MALLOCONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313

SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:  
VT-d = Disabled  
Patrol Scrub = Disabled  
SNC = Enable SNC2 (2-clusters)  
Engine Boost = Aggressive  
SR-IOV Support = Disabled  
BMC Configuration:  
Fan mode = Full speed mode

Sysinfo program /home/ic23/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Fri Feb 17 01:33:29 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-45.el8\_4.3)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313

SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
Linux localhost.localdomain 4.18.0-305.25.1.el8_4.x86_64 #1 SMP Mon Oct 18 14:34:11 EDT 2021 x86_64 x86_64
x86_64 GNU/Linux
-----
```

```
-----
2. w
01:33:29 up 16:44, 1 user, load average: 17.00, 43.24, 60.55
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU WHAT
root      tty1     -             Thu08       16:43m     1.15s   0.01s /bin/bash ./rate.sh
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126683
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126683
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=80 -c
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=40 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=80 --configfile
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=40 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.009/templogs/preenv.intrate.009.0.log --lognum 009.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/ic23
-----
```

```
-----
6. /proc/cpuinfo
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313

SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
model name      : Intel(R) Xeon(R) Gold 5320T CPU @ 2.30GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping      : 6
microcode     : 0xd000331
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 20
siblings      : 40
2 physical ids (chips)
80 processors (hardware threads)
physical id 0: core ids 0-19
physical id 1: core ids 0-19
physical id 0: apicids 0-39
physical id 1: apicids 64-103
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 80
On-line CPU(s) list: 0-79
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 5320T CPU @ 2.30GHz
BIOS Model name: Intel(R) Xeon(R) Gold 5320T CPU @ 2.30GHz
Stepping: 6
CPU MHz: 2362.142
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 30720K
NUMA node0 CPU(s): 0-9,40-49
NUMA node1 CPU(s): 10-19,50-59
NUMA node2 CPU(s): 20-29,60-69
NUMA node3 CPU(s): 30-39,70-79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313

SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect  
wbnoinvd dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req avx512vbmi  
umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme  
avx512\_vpopcntdq la57 rdpid fsrm md\_clear pconfig flush\_lld arch\_capabilities

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-9,40-49
node 0 size: 257619 MB
node 0 free: 256568 MB
node 1 cpus: 10-19,50-59
node 1 size: 258043 MB
node 1 free: 257255 MB
node 2 cpus: 20-29,60-69
node 2 size: 258043 MB
node 2 free: 256996 MB
node 3 cpus: 30-39,70-79
node 3 size: 258003 MB
node 3 free: 257167 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10
```

### 9. /proc/meminfo

```
MemTotal: 1056471760 kB
```

### 10. who -r

```
run-level 3 Feb 16 08:49
```

### 11. Systemd service manager version: systemd 239 (239-45.el8\_4.3)

```
Default Target Status
multi-user      running
```

### 12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd
crond firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump
libstoragemgmt lm_sensors loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
nvme-fc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd
sssd syslog sysstat timedatex tuned udisks2 vdo
disabled arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables fancontrol
grafana-server iprump iprinit iprupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon nftables
nis-domainname nvmmf-autoconnect oddjobd pmfind pmie_check pmlogger_check pmlogger_daily_report
pmlogger_daily_report-poll pmproxy podman-auto-update postfix powertop psacct ras-mc-ctl
rasdaemon rdisc rhcd rhsm rhsm-facts rrdcached saslauthd serial-getty@ sshd-keygen@
systemd-resolved tcsd
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated
```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313

SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-305.25.1.el8_4.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.50 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
Current active profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    0
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313

SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 19. OS release

```
-----
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 8.4 (Ootpa)
redhat-release  Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release  Red Hat Enterprise Linux release 8.4 (Ootpa)
-----
```

### 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

```
-----
itlb_multihit      Not affected
lltf                Not affected
mds                 Not affected
meltdown           Not affected
spec_store_bypass  Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1          Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2          Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds               Not affected
tsx_async_abort     Not affected
-----
```

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

### 21. Disk information

```
-----
SPEC is set to: /home/ic23
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   878G 124G  755G  15% /home
-----
```

### 22. /sys/devices/virtual/dmi/id

```
-----
Vendor:          ASUSTeK COMPUTER INC.
Product:          RS720-E10-RS12
Product Family:  Server
Serial:           012345678901
-----
```

### 23. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2933

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
-----
BIOS Vendor:      American Megatrends Inc.
BIOS Version:      0802
BIOS Date:         04/29/2022
BIOS Revision:     8.2
-----
```

## Compiler Version Notes

```
=====
C | 502.gcc_r(peak)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

**SPECrate®2017\_int\_base = 313**  
**SPECrate®2017\_int\_peak = 325**

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313  
SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

### C benchmarks:

icx

### C++ benchmarks:

icpx

### Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313

SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmallo

502.gcc\_r: -m32  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32\_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmallo

557.xz\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Gold 5320T)

SPECrate®2017\_int\_base = 313  
SPECrate®2017\_int\_peak = 325

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes  
523.xalancbmk\_r: basepeak = yes  
531.deepsjeng\_r: basepeak = yes  
541.leela\_r: basepeak = yes  
  
Fortran benchmarks:  
  
548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>  
<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

You can also download the XML flags sources by saving the following links:  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>  
<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-17 01:33:28-0500.  
Report generated on 2024-01-29 17:26:44 by CPU2017 PDF formatter v6716.  
Originally published on 2023-03-28.