



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358


Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

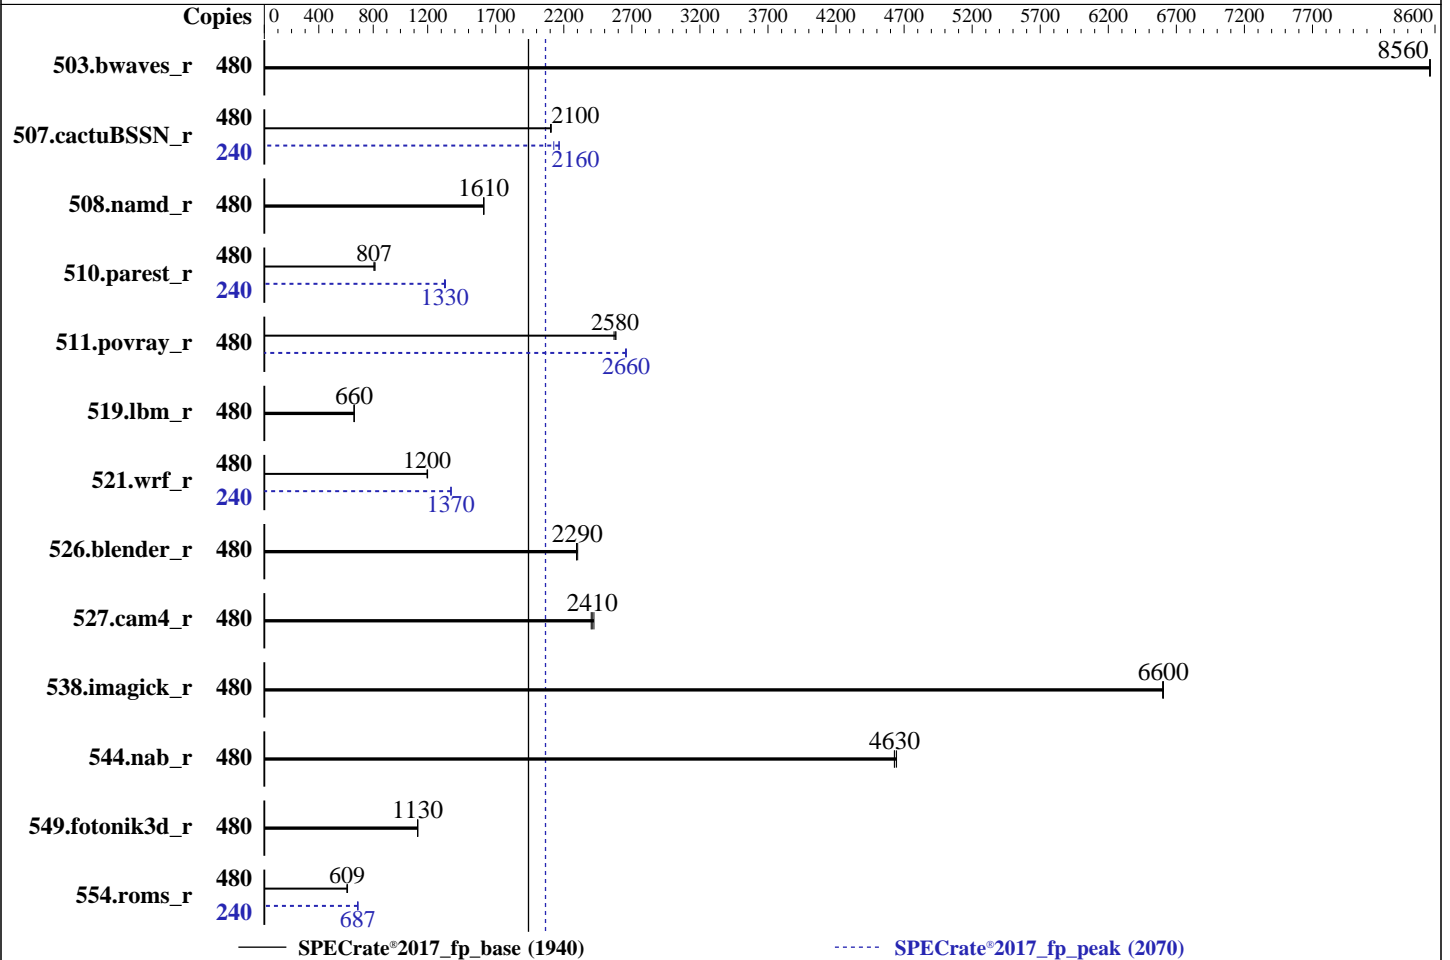

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 03.00.00 released Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	480	562	8560	562	8570	562	8560	480	562	8560	562	8570	562	8560
507.cactuBSSN_r	480	289	2100	288	2110	289	2100	240	143	2130	140	2170	140	2160
508.namd_r	480	283	1610	283	1610	283	1610	480	283	1610	283	1610	283	1610
510.parest_r	480	1543	814	1556	807	1558	806	240	474	1320	472	1330	474	1330
511.povray_r	480	436	2570	434	2580	435	2580	480	422	2650	422	2660	422	2660
519.lbm_r	480	766	660	767	660	767	660	480	766	660	767	660	767	660
521.wrf_r	480	898	1200	896	1200	899	1200	240	392	1370	392	1370	392	1370
526.blender_r	480	319	2290	318	2300	319	2290	480	319	2290	318	2300	319	2290
527.cam4_r	480	347	2420	349	2410	350	2400	480	347	2420	349	2410	350	2400
538.imagick_r	480	181	6600	181	6600	181	6600	480	181	6600	181	6600	181	6600
544.nab_r	480	175	4630	174	4630	174	4640	480	175	4630	174	4630	174	4640
549.fotonik3d_r	480	1661	1130	1660	1130	1660	1130	480	1661	1130	1660	1130	1660	1130
554.roms_r	480	1248	611	1256	607	1252	609	240	557	685	555	687	555	688

SPECrate®2017_fp_base = **1940**

SPECrate®2017_fp_peak = **2070**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to SNC4

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Apr 4 20:41:37 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.e19_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Platform Notes (Continued)

2. w

```

20:41:38 up 6:53, 2 users, load average: 300.57, 434.13, 457.75
USER  TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root  tty1      13:48   6:52m  1.16s  0.01s  -bash
root  tty2      13:49   6:50m  0.00s  0.00s  -bash

```

3. Username

From environment variable \$USER: root

4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126194
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126194
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000130
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 60
siblings        : 120
4 physical ids (chips)
480 processors (hardware threads)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Platform Notes (Continued)

```

physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 480
On-line CPU(s) list:   0-479
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:       Intel(R) Xeon(R) Platinum 8490H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):              4
Stepping:               8
Frequency boost:        enabled
CPU max MHz:            1901.0000
CPU min MHz:            800.0000
BogoMIPS:               3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic
                        movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_l1d arch_capabilities
L1d cache:              11.3 MiB (240 instances)
L1i cache:              7.5 MiB (240 instances)
L2 cache:               480 MiB (240 instances)
L3 cache:               450 MiB (4 instances)
NUMA node(s):          16
NUMA node0 CPU(s):     0-14,240-254
NUMA node1 CPU(s):     15-29,255-269
NUMA node2 CPU(s):     30-44,270-284

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Platform Notes (Continued)

```

NUMA node3 CPU(s):          45-59,285-299
NUMA node4 CPU(s):          60-74,300-314
NUMA node5 CPU(s):          75-89,315-329
NUMA node6 CPU(s):          90-104,330-344
NUMA node7 CPU(s):          105-119,345-359
NUMA node8 CPU(s):          120-134,360-374
NUMA node9 CPU(s):          135-149,375-389
NUMA node10 CPU(s):         150-164,390-404
NUMA node11 CPU(s):         165-179,405-419
NUMA node12 CPU(s):         180-194,420-434
NUMA node13 CPU(s):         195-209,435-449
NUMA node14 CPU(s):         210-224,450-464
NUMA node15 CPU(s):         225-239,465-479
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-14,240-254
node 0 size: 64069 MB
node 0 free: 49237 MB
node 1 cpus: 15-29,255-269
node 1 size: 64505 MB
node 1 free: 52397 MB
node 2 cpus: 30-44,270-284
node 2 size: 64505 MB
node 2 free: 52216 MB
node 3 cpus: 45-59,285-299
node 3 size: 64505 MB
node 3 free: 52375 MB
node 4 cpus: 60-74,300-314
node 4 size: 64505 MB
node 4 free: 52343 MB
node 5 cpus: 75-89,315-329
node 5 size: 64505 MB
node 5 free: 52406 MB
node 6 cpus: 90-104,330-344
node 6 size: 64505 MB
node 6 free: 52385 MB
node 7 cpus: 105-119,345-359
node 7 size: 64505 MB
node 7 free: 52399 MB
node 8 cpus: 120-134,360-374
node 8 size: 64505 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Platform Notes (Continued)

```

node 8 free: 52371 MB
node 9 cpus: 135-149,375-389
node 9 size: 64505 MB
node 9 free: 52399 MB
node 10 cpus: 150-164,390-404
node 10 size: 64469 MB
node 10 free: 52368 MB
node 11 cpus: 165-179,405-419
node 11 size: 64505 MB
node 11 free: 52384 MB
node 12 cpus: 180-194,420-434
node 12 size: 64505 MB
node 12 free: 52392 MB
node 13 cpus: 195-209,435-449
node 13 size: 64505 MB
node 13 free: 52399 MB
node 14 cpus: 210-224,450-464
node 14 size: 64505 MB
node 14 free: 52378 MB
node 15 cpus: 225-239,465-479
node 15 size: 64476 MB
node 15 free: 52391 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
1:  12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
2:  12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
3:  12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
4:  21 21 21 21 10 12 12 12 21 21 21 21 21 21 21 21
5:  21 21 21 21 12 10 12 12 21 21 21 21 21 21 21 21
6:  21 21 21 21 12 12 10 12 21 21 21 21 21 21 21 21
7:  21 21 21 21 12 12 12 10 21 21 21 21 21 21 21 21
8:  21 21 21 21 21 21 21 21 10 12 12 12 21 21 21 21
9:  21 21 21 21 21 21 21 21 12 10 12 12 21 21 21 21
10: 21 21 21 21 21 21 21 21 12 12 10 12 21 21 21 21
11: 21 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21
12: 21 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12
13: 21 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12
14: 21 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12
15: 21 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      1056346288 kB

```

```

-----
10. who -r
run-level 3 Apr 4 13:48

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user      degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD ACTIVE SUB    DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Platform Notes (Continued)

13. Services, from `systemctl list-unit-files`

```

STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                systemd-network-generator tuned udisks2 upower
enabled-runtime  systemd-remount-fs
disabled       blk-availability canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell kvm_stat
                man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@
                sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

14. Linux kernel boot-time arguments, from `/proc/cmdline`

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

15. `cpupower frequency-info`

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 1.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
boost state support:
  Supported: yes
  Active: yes

```

16. `tuned-adm active`

Current active profile: `throughput-performance`

17. `sysctl`

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages      0
vm.swappiness                    10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode            0

```

18. `/sys/kernel/mm/transparent_hugepage`

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Platform Notes (Continued)

```

defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
21. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   819G 421G 398G 52% /home

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:          IETT
Product:         NF8260M7
Product Family:  Not specified
Serial:          000000000

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  32x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800

```

```

-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     03.00.00
BIOS Date:        12/16/2022

```

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
(IEI)

SPECrate®2017_fp_base = 1940

NF8260M7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2070

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-04 20:41:37-0400.

Report generated on 2023-04-26 09:48:53 by CPU2017 PDF formatter v6716.

Originally published on 2023-04-25.