



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

### H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

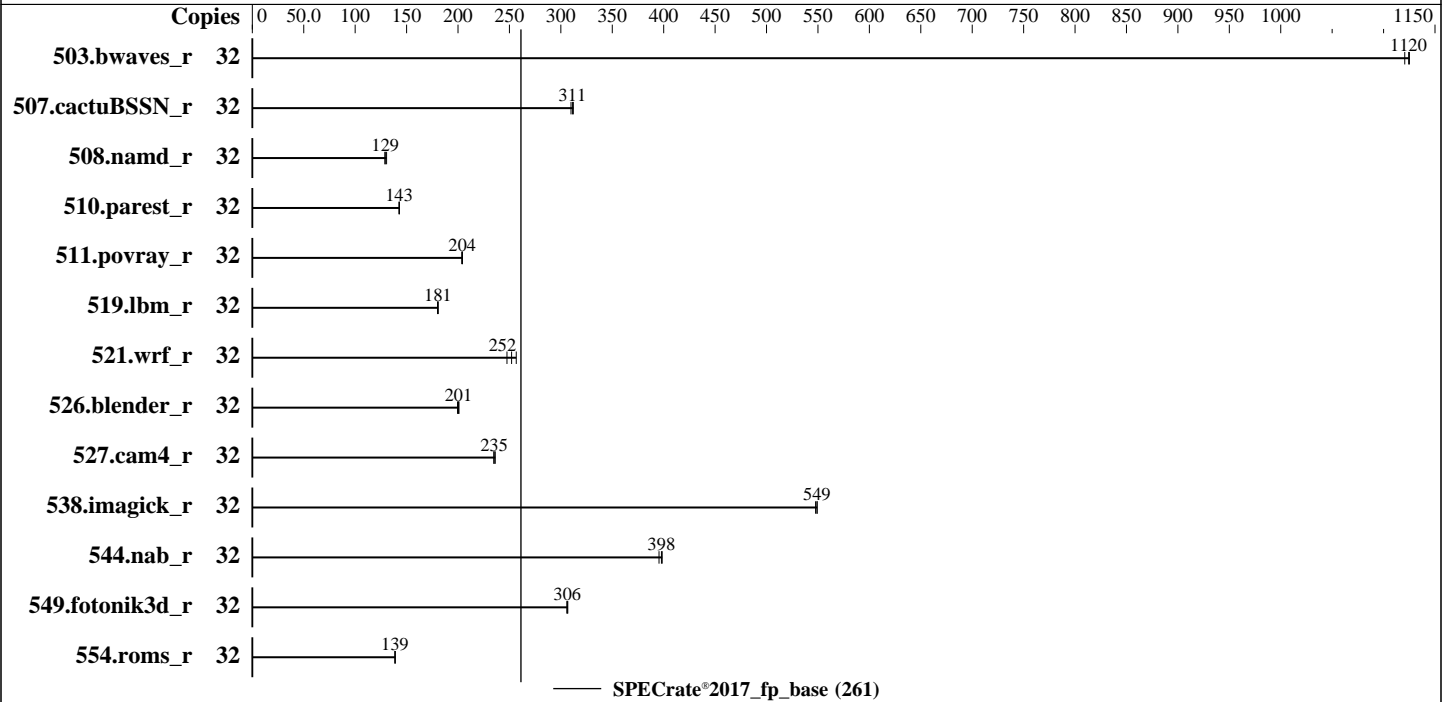

### Hardware

CPU Name: Intel Xeon Gold 5415+  
 Max MHz: 4100  
 Nominal: 2900  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 5.29 released Mar-2023 BIOS  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261  
SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066  
Test Sponsor: New H3C Technologies Co., Ltd.  
Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	285	1130	<u>285</u>	<u>1120</u>	286	1120							
507.cactuBSSN_r	32	130	312	131	310	<u>130</u>	<u>311</u>							
508.namd_r	32	236	129	<u>235</u>	<u>129</u>	233	131							
510.parest_r	32	586	143	<u>586</u>	<u>143</u>	586	143							
511.povray_r	32	366	204	<u>366</u>	<u>204</u>	367	204							
519.lbm_r	32	187	181	187	180	<u>187</u>	<u>181</u>							
521.wrf_r	32	279	257	<u>284</u>	<u>252</u>	289	248							
526.blender_r	32	244	200	243	201	<u>243</u>	<u>201</u>							
527.cam4_r	32	<u>238</u>	<u>235</u>	237	236	238	235							
538.imagick_r	32	<u>145</u>	<u>549</u>	145	549	145	548							
544.nab_r	32	135	399	136	395	<u>135</u>	<u>398</u>							
549.fotonik3d_r	32	<u>407</u>	<u>306</u>	408	306	407	307							
554.roms_r	32	<u>366</u>	<u>139</u>	366	139	367	139							

SPECrate®2017\_fp\_base = 261

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
cpupower was set to performance using "cpupower frequency-set -g performance"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## General Notes (Continued)

Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:  
Set SNC to Enable SNC2  
Set Patrol Scrub to Disabled  
Set Power Performance Tuning to BIOS Controls EPB  
Set ENERGY\_PERF\_BIAS\_CFG mode to Performance  
Set LLC Prefetch to Disabled  
Set FB Thread Slicing to Enabled  
Set AMP Prefetch to Enabled  
  
Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Apr 20 08:04:05 2023  
  
SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
  - 2. w
  - 3. Username
  - 4. ulimit -a
  - 5. sysinfo process ancestry
  - 6. /proc/cpuinfo
  - 7. lscpu
  - 8. numactl --hardware
  - 9. /proc/meminfo
  - 10. who -r
  - 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  - 12. Services, from systemctl list-unit-files
  - 13. Linux kernel boot-time arguments, from /proc/cmdline
  - 14. cpupower frequency-info
  - 15. sysctl
  - 16. /sys/kernel/mm/transparent\_hugepage
  - 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  - 18. OS release
  - 19. Disk information
  - 20. /sys/devices/virtual/dmi/id
  - 21. dmidecode
  - 22. BIOS
- 
- 1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux
- 

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261  
SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

2. w  
08:04:05 up 1 min, 1 user, load average: 0.70, 0.41, 0.16  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttyl - 08:03 21.00s 0.95s 0.01s -bash

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4126972  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4126972  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd linux --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=16 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base -o all fprate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=16 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base --output\_format all --nopower --runmode  
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/speccpu

6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5415+  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b000181  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs  
cpu cores : 8  
siblings : 16  
2 physical ids (chips)  
32 processors (hardware threads)  
physical id 0: core ids 0-7  
physical id 1: core ids 0-7

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

physical id 0: apicids 0-15  
physical id 1: apicids 128-143  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 5415+
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              2
Stepping:               8
CPU max MHz:           4100.0000
CPU min MHz:           800.0000
BogoMIPS:              5800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             768 KiB (16 instances)
L1i cache:             512 KiB (16 instances)
L2 cache:              32 MiB (16 instances)
L3 cache:              45 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-3,16-19
NUMA node1 CPU(s):    4-7,20-23
NUMA node2 CPU(s):    8-11,24-27
NUMA node3 CPU(s):    12-15,28-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261  
SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 257683 MB
node 0 free: 257045 MB
node 1 cpus: 4-7,20-23
node 1 size: 258045 MB
node 1 free: 257714 MB
node 2 cpus: 8-11,24-27
node 2 size: 258045 MB
node 2 free: 257775 MB
node 3 cpus: 12-15,28-31
node 3 size: 257991 MB
node 3 free: 257606 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056529036 kB

10. who -r

run-level 3 Apr 20 08:02

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels
rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

indirect systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=5e9c115a-0dad-46df-981e-74909447beaa  
linux  
ip=dhcp  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 4.10 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
16. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261  
SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

scan\_sleep\_millisecs 10000

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4  
-----

19. Disk information  
SPEC is set to: /home/speccpu  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 btrfs 890G 23G 866G 3% /home  
-----

20. /sys/devices/virtual/dmi/id  
Vendor: New H3C Technologies Co., Ltd.  
Product: H3C UniServer R4900 G6 Ultra  
Product Family: Rack  
Serial: 210235A4CJ4900060001  
-----

21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Micron MTC40F2046S1RC48BA1 64 GB 2 rank 4800, configured at 4400  
-----

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 6.00.17  
BIOS Date: 03/30/2023  
BIOS Revision: 5.29  
-----

## Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261  
SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.  
H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Gold 5415+)

SPECrate®2017\_fp\_base = 261

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevC.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevC.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-20 08:04:04-0400.

Report generated on 2023-05-23 11:01:49 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.