



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023

Hardware Availability: Jul-2021

Software Availability: Dec-2022

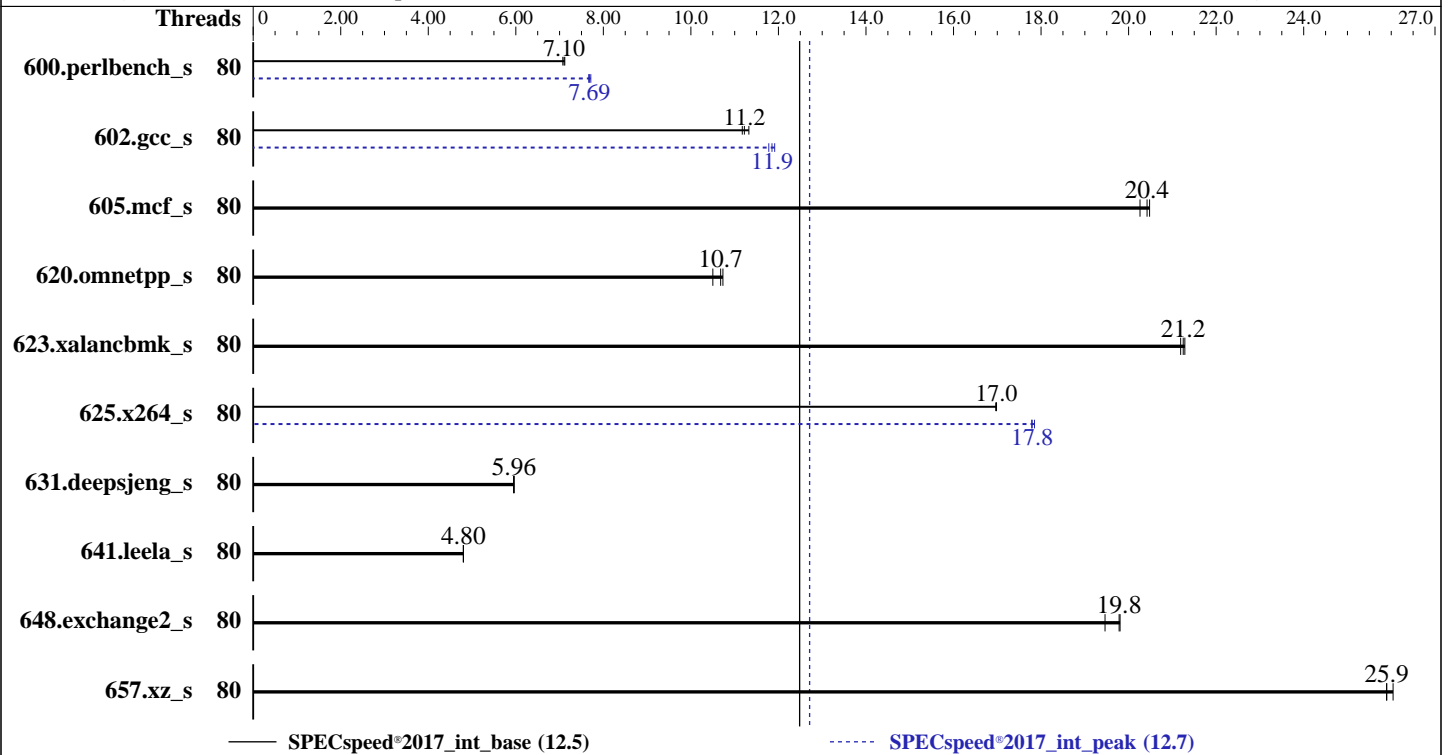

Hardware

CPU Name: Intel Xeon Platinum 8380
 Max MHz: 3400
 Nominal: 2300
 Enabled: 80 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)
 4.18.0-240.22.1.el8_3.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 0504 released May-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	80	249	7.12	<u>250</u>	<u>7.10</u>	251	7.07	80	230	7.71	232	7.66	<u>231</u>	<u>7.69</u>
602.gcc_s	80	356	11.2	<u>355</u>	<u>11.2</u>	352	11.3	80	338	11.8	<u>336</u>	<u>11.9</u>	334	11.9
605.mcf_s	80	233	20.3	231	20.5	<u>231</u>	<u>20.4</u>	80	233	20.3	231	20.5	<u>231</u>	<u>20.4</u>
620.omnetpp_s	80	155	10.5	<u>153</u>	<u>10.7</u>	152	10.7	80	155	10.5	<u>153</u>	<u>10.7</u>	152	10.7
623.xalancbmk_s	80	66.9	21.2	66.6	21.3	<u>66.7</u>	<u>21.2</u>	80	66.9	21.2	66.6	21.3	<u>66.7</u>	<u>21.2</u>
625.x264_s	80	104	17.0	<u>104</u>	<u>17.0</u>	104	17.0	80	99.2	17.8	<u>99.1</u>	<u>17.8</u>	98.8	17.9
631.deepsjeng_s	80	240	5.96	<u>240</u>	<u>5.96</u>	241	5.95	80	240	5.96	<u>240</u>	<u>5.96</u>	241	5.95
641.leela_s	80	355	4.80	<u>355</u>	<u>4.80</u>	355	4.80	80	355	4.80	<u>355</u>	<u>4.80</u>	355	4.80
648.exchange2_s	80	151	19.5	<u>149</u>	<u>19.8</u>	148	19.8	80	151	19.5	<u>149</u>	<u>19.8</u>	148	19.8
657.xz_s	80	237	26.0	<u>239</u>	<u>25.9</u>	239	25.9	80	237	26.0	<u>239</u>	<u>25.9</u>	239	25.9

SPECspeed®2017_int_base = **12.5**

SPECspeed®2017_int_peak = **12.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpull19/lib/intel64:/home/cpull19/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

General Notes (Continued)

Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
VT-d = Disabled
Patrol Scrub = Disabled
Hyper-Threading = Disable
Engine Boost = Aggressive
SR-IOV Support = Disabled
BMC Configuration:
Fan mode = Full speed mode

Sysinfo program /home/cpu119/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Apr 19 22:14:35 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 239 (239-41.el8_3.2)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
 22. Disk information
 23. /sys/devices/virtual/dmi/id
 24. dmidecode
 25. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

1. `uname -a`
Linux localhost.localdomain 4.18.0-240.22.1.el8_3.x86_64 #1 SMP Thu Mar 25 14:36:04 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux

2. `w`
22:14:35 up 10:51, 2 users, load average: 54.23, 66.92, 69.55
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 11:28 4:48m 1.06s 0.00s /bin/bash ./speed.sh
root tty2 - 11:28 4:21m 0.08s 0.08s -bash

3. Username
From environment variable \$USER: root

4. `ulimit -a`
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126038
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126038
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
/bin/bash ./speed.sh
/bin/bash ./speed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=80 --tune base,peak -o all --define
intspeedaffinity --define drop_caches intspeer
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=80 --tune base,peak --output_format all
--define intspeeraffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeer
intspeer --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.005/templogs/preenv.intspeer.005.0.log
--lognum 005.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpull9

6. `/proc/cpuinfo`
model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
vendor_id : GenuineIntel
cpu family : 6
model : 106

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

```
stepping          : 6
microcode         : 0xd000280
bugs              : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores         : 40
siblings          : 40
2 physical ids (chips)
80 processors (hardware threads)
physical id 0: core ids 0-39
physical id 1: core ids 0-39
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            80
On-line CPU(s) list: 0-79
Thread(s) per core: 1
Core(s) per socket: 40
Socket(s):         2
NUMA node(s):     2
Vendor ID:         GenuineIntel
CPU family:        6
Model:             106
Model name:        Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping:          6
CPU MHz:           2765.779
CPU max MHz:       3400.0000
CPU min MHz:       800.0000
BogoMIPS:          4600.00
Virtualization:    VT-x
L1d cache:         48K
L1i cache:         32K
L2 cache:          1280K
L3 cache:          61440K
NUMA node0 CPU(s): 0-39
NUMA node1 CPU(s): 40-79
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
stibp ibrs_enhanced tpr_shadow vmmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-39
node 0 size: 482150 MB
node 0 free: 514168 MB
node 1 cpus: 40-79
node 1 size: 483330 MB
node 1 free: 513297 MB
node distances:
node  0  1
 0:  10  20
 1:  20  10

```

```

-----
9. /proc/meminfo
MemTotal:      1056472780 kB

```

```

-----
10. who -r
run-level 3 Apr 19 11:23

```

```

-----
11. Systemd service manager version: systemd 239 (239-41.el8_3.2)
Default Target Status
multi-user      degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT          LOAD ACTIVE SUB    DESCRIPTION
* kdump.service loaded failed failed Crash recovery kernel arming

```

```

-----
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online abrt-journal-core abrt-oops
abrt-vmcore abrt-xorg abrttd atd auditd autovt@ chronyd crond firewalld getty@ import-state
irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors loadmodules lvm2-monitor mcelog
mdmonitor microcode multipathd pmcd pmie pmlogger rhsmcertd rngd rsyslog selinux-autorelabel-mark
smartd sshd sssd syslog sysstat timedatex tuned udisks2 vdo vgauthd vmtoolsd
disabled abrt-ccpp abrt-pstoreoops arp-ethers blk-availability chrony-wait console-getty cpupower dbxtool
debug-shell ebttables fancontrol grafana-server iprdump iprinit iprupdate ipsec iscsid iscsiui
kpatch ledmon nftables nis-domainname oddjobd pmfind pmie_check pmlogger_check
pmlogger_daily_report pmlogger_daily_report-poll pmmgr pmproxy podman-auto-update postfix
powertop psacct qemu-guest-agent ras-mc-ctl rasdaemon rdisc rdma rhnsd rhsm rhsm-facts
rngd-wake-threshold rrdcached saslauthd serial-getty@ snmpd snmptrapd sshd-keygen@
systemd-resolved tcsd tog-pegasus trace-cmd
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-240.22.1.el8_3.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

rhgb
quiet

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.40 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

18. /sys/kernel/mm/transparent_hugepage
defrag always defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 8.3 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release Red Hat Enterprise Linux release 8.3 (Ootpa)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

itlb_multihit	Not affected
l1tf	Not affected
mds	Not affected
meltdown	Not affected
spec_store_bypass	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1	Mitigation: usercopy/swaps barriers and __user pointer sanitization
spectre_v2	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbsds	Not affected
tsx_async_abort	Not affected

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

22. Disk information

SPEC is set to: /home/cpul19

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	148G	5.4G	143G	4%	/home

23. /sys/devices/virtual/dmi/id

Vendor:	ASUSTeK COMPUTER INC.
Product:	RS720-E10-RS12
Product Family:	Server
Serial:	012345678901

24. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x NO DIMM NO DIMM
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

25. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	0504
BIOS Date:	05/26/2021
BIOS Revision:	5.4

Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```

=====
C++   | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
=====

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023

Hardware Availability: Jul-2021

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = 12.7

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023

Hardware Availability: Jul-2021

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

602.gcc_s (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-19 10:14:35-0400.

Report generated on 2024-01-29 17:42:45 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.