



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573


Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

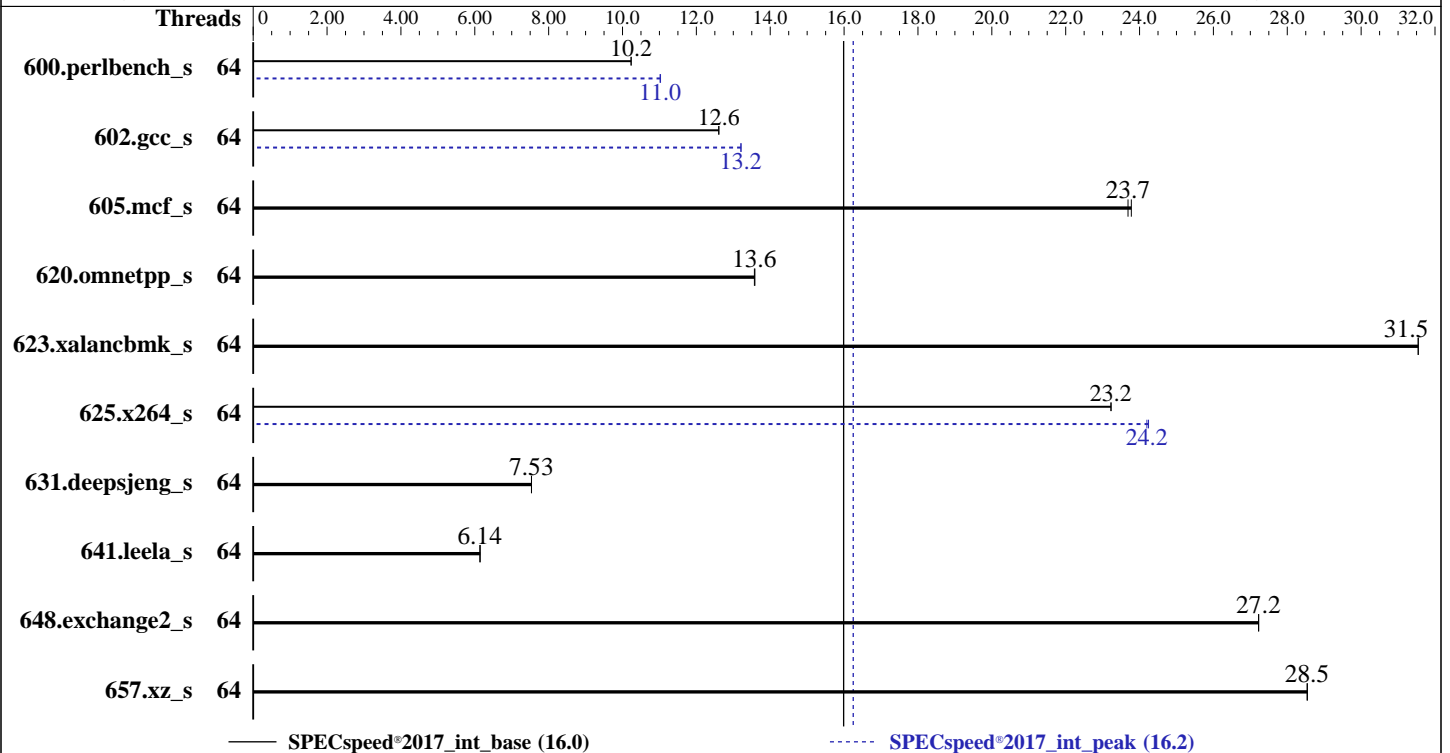

Hardware

CPU Name: Intel Xeon Platinum 8462Y+
 Max MHz: 4100
 Nominal: 2800
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 60 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.19-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 1.0.0 released Mar-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECSpeed®2017_int_peak = 16.2

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	173	10.2	173	10.2			64	161	11.0	161	11.0		
602.gcc_s	64	316	12.6	316	12.6			64	301	13.2	302	13.2		
605.mcf_s	64	199	23.7	199	23.8			64	199	23.7	199	23.8		
620.omnetpp_s	64	120	13.6	120	13.6			64	120	13.6	120	13.6		
623.xalancbmk_s	64	44.9	31.5	44.9	31.5			64	44.9	31.5	44.9	31.5		
625.x264_s	64	75.9	23.2	76.0	23.2			64	72.8	24.2	72.9	24.2		
631.deepsjeng_s	64	190	7.54	190	7.53			64	190	7.54	190	7.53		
641.leela_s	64	278	6.14	277	6.15			64	278	6.14	277	6.15		
648.exchange2_s	64	108	27.2	108	27.2			64	108	27.2	108	27.2		
657.xz_s	64	217	28.5	217	28.5			64	217	28.5	217	28.5		

SPECSpeed®2017_int_base = **16.0**

SPECSpeed®2017_int_peak = **16.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

General Notes (Continued)

Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

ADDC Setting : Disabled
 DIMM Self Healing on
 Uncorrectable Memory Error : Disabled
 Logical Processor : Disabled
 Virtualization Technology : Disabled
 Optimizer Mode : Enabled

System Profile : Custom
 CPU Power Management : Maximum Performance
 CLE : Disabled
 C States : Autonomous
 Memory Patrol Scrub : Disabled
 Energy Efficiency Policy : Performance
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu May 4 10:34:07 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent_hugepage
- 19. /sys/kernel/mm/transparent_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.19-default #1 SMP PREEMPT_DYNAMIC Wed Apr 20 08:32:52 UTC 2022 (d6fb753/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
10:34:07 up 10 min, 2 users, load average: 1.42, 1.24, 0.75
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      :        :               10:25   ?xdm?  1:12   0.02s gdm-session-worker [pam/gdm-autologin]
root      :0       :               10:25   ?xdm?  1:12   0.02s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126145
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126145
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/usr/lib/systemd/systemd --user
/usr/lib/gnome-terminal-server
bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
--define DL-BIOS-addcd=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define
intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define
DL-BIOS-LogProcD=1 --define DL-BIOS-addcd=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc
--define DL-BIOS-LogProcD=1 --define DL-BIOS-addcd=1 --define DL-BIOS-VirtD=1 --output_format
csv,html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed intspeak --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8462Y+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8462Y+
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 2
Stepping: 8
BogoMIPS: 5600.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavesopt xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

```
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
node 0 size: 515505 MB
node 0 free: 506635 MB
node 1 cpus: 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63
node 1 size: 516058 MB
node 1 free: 510694 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo

```
MemTotal: 1056322052 kB
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

10. who -r
run-level 5 May 4 10:26

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* systemd-udev-settle.service loaded failed failed Wait for udev To Complete Device Initialization

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd avahi-daemon bluetooth cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings klog libvirt lvm2-monitor nscd nvme-fc-boot-connections oracle postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xencommons
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis apache2 apache2@ appstream-sync-cache autofs autoyast-initscripts avahi-dnsmasq bgpd blk-availability bluetooth-mesh boot-sysctl booth-arbitrator booth@ ca-certificates chrony-wait chronyd clamav-milter clamd cloud-config cloud-final cloud-init cloud-init-local console-getty containerbuild-regionsrv corosync corosync-notifyd crm_mon cryptctl-client cryptctl-server ctdb cups cups-browsed ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dmraid-activation dnsmasq docker-img-store-setup docker-img-store-setup-xfs drbd drbd-lvchange@ drbd-wait-promotable@ ebttables exchange-bmc-os-info fetchmail freshclam google-guest-agent google-shutdown-scripts google-startup-scripts gpm grub2-once guestregister haveged-switch-root hawk hwloc-dump-hwdata ipmi ipmiev d ipvsadm iscsi-init iscsid iscsiui isid issue-add-ssh-keys kdump kdump-early kexec-load ksm kvm_stat ldirector libvirt-guests logd lunmask lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd munge named nfs nfs-blkmap nfs-server nfsserver nm-cloud-setup nmb ntp-wait ntpd nvme-fc-autoconnect openvpn@ ospf6d ospfd ostree-remount pacemaker pppoe pppoe-server racoon racoon-setkey radvd rarpd@ rdisc ripd ripngd rootgrow rpcbind rpmconfigcheck rsyncd rtkit-daemon salt-minion sapconf saprouter saptune sbd sbd_remote serial-getty@ slurmd slurmdb smartd_generate_opts smb snmpd snmptrapd spamd speech-dispatcher squid srp_daemon srp_daemon_port@ strongswan strongswan-starter svnserv sysstat systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsh tuned udisks2 upower virtinterfaced virtnetworkd virtnodevdev virtwfilterd virtproxyd virtqemu virtsecret virtstoraged virtxend vsftpd waagent winbind wpa_supplicant@ xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsoled xendomains xenstored xrdp xrdp-sesman ypbind zebra
indirect pcsd saned@ uidd virtlockd virtlogd wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.19-default
root=UUID=5dbfa664-5ba7-440a-b916-2ff8d67469f6
splash=silent
mitigations=auto
quiet
security=apparmor

15. cpupower frequency-info
analyzing CPU 0:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

Unable to determine current policy
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
No current active profile.

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 20
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

18. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

20. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 60G 4.2G 56G 7% /mnt/ramdisk

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

22. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge XE8640
Product Family: PowerEdge
Serial: 1234567

23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x 00CE00B300CE M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
6x 00CE069D00CE M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.0.0
BIOS Date: 03/23/2023
BIOS Revision: 1.0

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 16.0

PowerEdge XE8640 (Intel Xeon Platinum 8462Y+)

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-03 22:34:06-0400.

Report generated on 2024-01-29 17:46:59 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.