



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 751

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: May-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

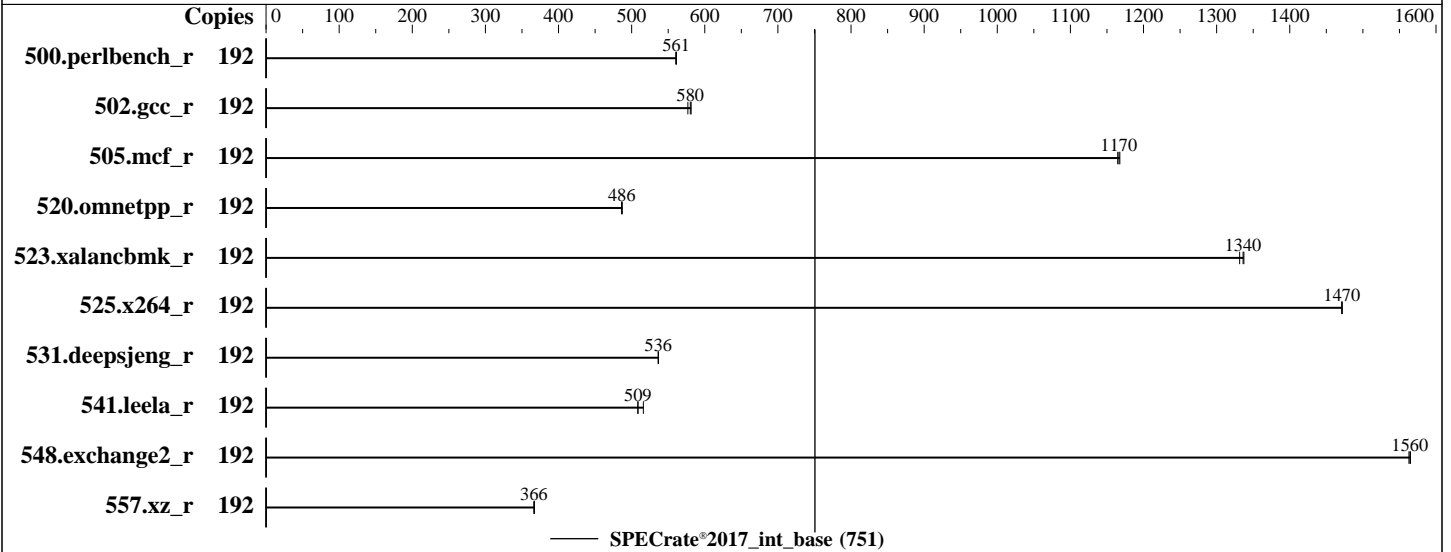

### Hardware

CPU Name: Intel Xeon Max 9468  
 Max MHz: 3500  
 Nominal: 2100  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 640 GB (16 x 32 GB 2Rx8 PC5-4800B-R + 2 x 64 GB HBM)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version USE117T 3.10 released Apr-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_base = 751

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	545	561	<b>545</b>	<b>561</b>	545	560							
502.gcc_r	192	471	577	468	581	<b>469</b>	<b>580</b>							
505.mcf_r	192	266	1160	266	1170	<b>266</b>	<b>1170</b>							
520.omnetpp_r	192	517	487	518	486	<b>518</b>	<b>486</b>							
523.xalancbmk_r	192	152	1330	152	1340	<b>152</b>	<b>1340</b>							
525.x264_r	192	<b>228</b>	<b>1470</b>	228	1470	229	1470							
531.deepsjeng_r	192	410	536	<b>410</b>	<b>536</b>	410	537							
541.leela_r	192	<b>625</b>	<b>509</b>	616	516	625	508							
548.exchange2_r	192	322	1560	321	1570	<b>322</b>	<b>1560</b>							
557.xz_r	192	566	366	<b>566</b>	<b>366</b>	565	367							

SPECrate®2017\_int\_base = 751

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/lib/ia32:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 751

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** May-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Custom Mode  
DCU Streamer Prefetcher set to Disabled  
UPI Link Disable set to Disabled 1 Link  
SNC set to SNC4  
LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on Perf-Seoul2-L Mon May 15 09:54:30 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- -----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_base = 751

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

1. `uname -a`  
Linux Perf-Seoul2-L 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. `w`  
09:54:30 up 15 min, 1 user, load average: 0.07, 0.02, 0.00  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 09:54 14.00s 2.13s 0.07s -bash

3. `Username`  
From environment variable \$USER: root

4. `ulimit -a`  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2062415  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2062415  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. `sysinfo process ancestry`  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base --output\_format all --nopower --runmode  
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.108/templogs/preenv.intrate.108.0.log --lognum 108.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017-1.1.9-ic2023.0

6. `/proc/cpuinfo`  
model name : Intel (R) Xeon (R) CPU Max 9468  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2c0001d1  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swappgs

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 751

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
cpu cores      : 48
siblings      : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:   0-191
Vendor ID:             GenuineIntel
Model name:            Intel (R) Xeon (R) CPU Max 9468
CPU family:            6
Model:                143
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):             2
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             4.5 MiB (96 instances)
L1i cache:             3 MiB (96 instances)
L2 cache:              192 MiB (96 instances)
L3 cache:              210 MiB (2 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-11,96-107
NUMA node1 CPU(s):    12-23,108-119
NUMA node2 CPU(s):    24-35,120-131
NUMA node3 CPU(s):    36-47,132-143
NUMA node4 CPU(s):    48-59,144-155
NUMA node5 CPU(s):    60-71,156-167
NUMA node6 CPU(s):    72-83,168-179
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 751

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

### Platform Notes (Continued)

```

NUMA node7 CPU(s):      84-95,180-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 64134 MB
node 0 free: 63097 MB
node 1 cpus: 12-23,108-119
node 1 size: 64505 MB
node 1 free: 63959 MB
node 2 cpus: 24-35,120-131
node 2 size: 64505 MB
node 2 free: 63948 MB
node 3 cpus: 36-47,132-143
node 3 size: 64505 MB
node 3 free: 64012 MB
node 4 cpus: 48-59,144-155
node 4 size: 64505 MB
node 4 free: 63999 MB
node 5 cpus: 60-71,156-167
node 5 size: 64505 MB
node 5 free: 64032 MB
node 6 cpus: 72-83,168-179
node 6 size: 64505 MB
node 6 free: 63643 MB
node 7 cpus: 84-95,180-191
node 7 size: 64457 MB
node 7 free: 63943 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  21  21  21  21
1:  12  10  12  12  21  21  21  21
2:  12  12  10  12  21  21  21  21
3:  12  12  12  10  21  21  21  21
4:  21  21  21  21  10  12  12  12
5:  21  21  21  21  12  10  12  12
6:  21  21  21  21  12  12  10  12
7:  21  21  21  21  12  12  12  10

```

9. /proc/meminfo

MemTotal: 528002976 kB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_base = 751

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

-----  
10. who -r  
run-level 3 May 15 09:40  
-----

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running  
-----

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged  
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels  
rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6  
wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load  
lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd tuned  
indirect wickedd  
-----

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=5f8bfd2f-a83f-41d5-8917-33e974e2f5bd  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
-----

14. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes  
-----

15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: powersave  
-----

16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 751

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** May-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode         0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   889G  42G  848G   5% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:         Lenovo
Product:        ThinkSystem SD650 V3
Product Family: ThinkSystem
Serial:         9999999999

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Intel  16 GB 1 rank 3200
 16x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 751

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

BIOS Version: USE117T-3.10  
BIOS Date: 04/17/2023  
BIOS Revision: 3.10  
Firmware Revision: 2.10

Each Intel Xeon CPU Max processor is configured with 64 GB of High Bandwidth Memory (HBM) in-package. dmidecode is additionally reporting the capacity of the CPU in-package  
HBM stack as: '8x Intel 16 GB 1 rank 3200'

### Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

### Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 751

ThinkSystem SD650 V3  
(2.10 GHz, Intel Xeon Max 9468)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-P.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-P.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-14 21:54:29-0400.

Report generated on 2024-01-29 17:49:29 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-13.