



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

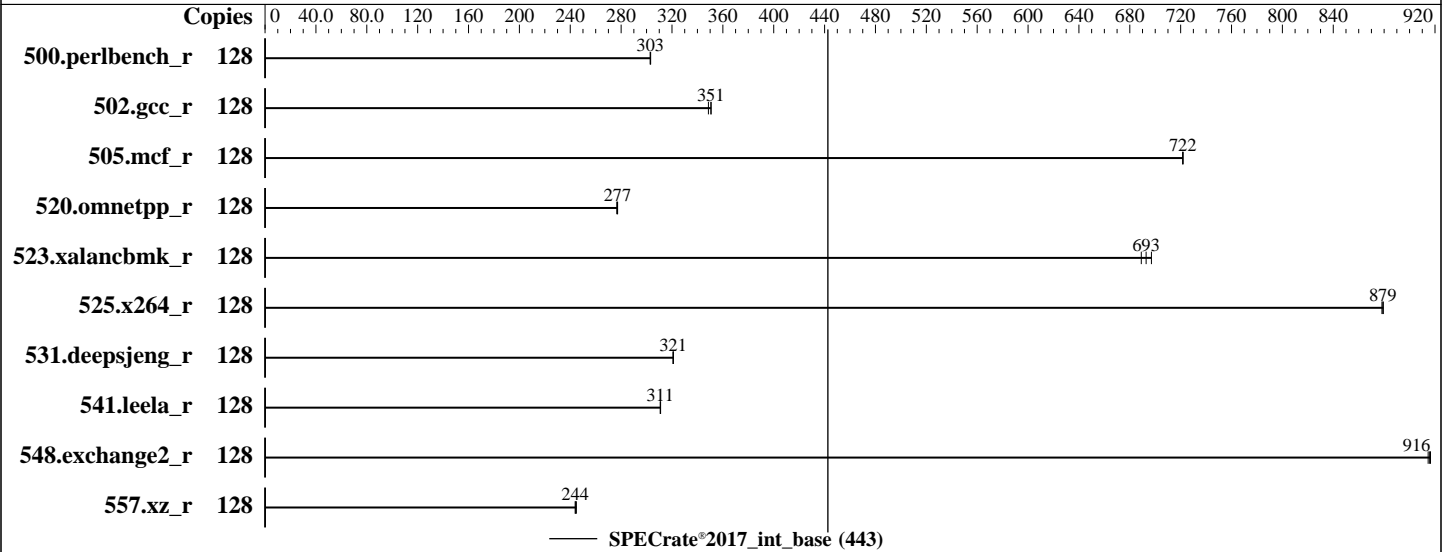

Hardware

CPU Name: Intel Xeon Gold 6338
 Max MHz: 3200
 Nominal: 2000
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa)
 4.18.0-305.el8.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 1.55 Released May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	673	303	673	303	672	303							
502.gcc_r	128	517	351	520	349	517	351							
505.mcf_r	128	287	722	287	722	287	722							
520.omnetpp_r	128	606	277	607	277	606	277							
523.xalancbmk_r	128	195	693	194	697	196	689							
525.x264_r	128	255	879	255	879	255	878							
531.deepsjeng_r	128	457	321	457	321	457	321							
541.leela_r	128	681	311	682	311	682	311							
548.exchange2_r	128	367	915	366	916	366	916							
557.xz_r	128	567	244	567	244	565	245							

SPECrate®2017_int_base = 443

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
"/spec2017-icc2023.0/lib/intel64:/spec2017-icc2023.0/lib/ia32:/spec2017-icc2023.0/je5.0.1-32"  
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enabled SNC2 (2-clusters)

Sysinfo program /spec2017-icc2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Jun 16 14:51:13 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 239 (239-45.el8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

1. uname -a
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021 x86_64 x86_64 x86_64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

GNU/Linux

```
-----
2. w
 14:51:13 up 20 min,  2 users,  load average: 0.06, 0.03, 0.09
USER  TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
root  tty1    -                14:50    9.00s  1.60s  0.08s -bash
root  pts/0   70.167.0.2       14:47    49.00s 0.04s  0.04s -bash
-----
```

```
-----
3. Username
From environment variable $USER:  root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 2060515
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2060515
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 128 -c ic2023.0-lin-core-avx512-rate-20221201.cfg --define
smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base -o all intrate
runcpu --define default-platform-flags --copies 128 --configfile ic2023.0-lin-core-avx512-rate-20221201.cfg
--define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base --output_format all --nopower --runmode rate --tune base --size refrate intrate
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.013/temlogs/preenv.intrate.013.0.log --lognum 013.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec2017-icc2023.0
-----
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping       : 6
microcode      : 0xd000363
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 64
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
CPU family:            6
Model:                106
Model name:            Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
BIOS Model name:       Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
Stepping:              6
CPU MHz:               2600.000
BogoMIPS:              4000.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              49152K
NUMA node0 CPU(s):    0-15,64-79
NUMA node1 CPU(s):    16-31,80-95
NUMA node2 CPU(s):    32-47,96-111
NUMA node3 CPU(s):    48-63,112-127
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts hwp_epp avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear
pconfig flush_l1d arch_capabilities
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128154 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 0 free: 127374 MB
node 1 cpus: 16-31,80-95
node 1 size: 129017 MB
node 1 free: 128284 MB
node 2 cpus: 32-47,96-111
node 2 size: 128979 MB
node 2 free: 128497 MB
node 3 cpus: 48-63,112-127
node 3 size: 129014 MB
node 3 free: 128533 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10

```

```

-----
9. /proc/meminfo
   MemTotal:      527529464 kB

```

```

-----
10. who -r
    run-level 3 Jun 16 14:31

```

```

-----
11. Systemd service manager version: systemd 239 (239-45.e18)
    Default Target Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd
           crond firewalld getty@ import-state irqbalance iscsi iscsi-onboot kdump libstoragemgmt
           loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
           nvme-fc-boot-connections rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd syslog
           sysstat timedatex tuned udisks2 vdo
disabled   arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables iprdump
           iprinit iprupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon nftables nvme-autoconnect oddjob
           psacct rdisc rhod rhsm rhsm-facts serial-getty@ sshd-keygen@ systemd-resolved tcsd
generated  SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
           gcc-toolset-9-stap-server gcc-toolset-9-systemtap scripts startup
indirect   sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked     systemd-timedated

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-4.18.0-305.e18.x86_64
root=UUID=711de346-1631-4b60-a626-37488271d525
ro
crashkernel=auto
resume=UUID=d6a3ac10-1ea1-4e42-a80b-54c427bcad19
rhgb
quiet

```

```

-----
14. cpupower frequency-info
    analyzing CPU 0:
        Unable to determine current policy

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

boost state support:
Supported: yes
Active: yes

15. tuned-adm active
No current active profile.

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 0
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer+madvise [madvise] never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 8.4 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release Red Hat Enterprise Linux release 8.4 (Ootpa)

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit Not affected
lltf Not affected
mds Not affected
meltdown Not affected
spec_store_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

spectre_v1 Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2 Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds Not affected
tsx_async_abort Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information
SPEC is set to: /spec2017-icc2023.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 420G 86G 334G 21% /

22. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 1288H V6
Product Family: Whitley
Serial: Serial

23. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 1.55
BIOS Date: 05/09/2023
BIOS Revision: 1.55

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 443

xFusion 1288H V6 (Intel Xeon Gold 6338)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.2023-07-05.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.2023-07-05.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-16 14:51:12-0400.
Report generated on 2024-01-29 17:54:32 by CPU2017 PDF formatter v6716.
Originally published on 2023-07-04.