



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

### SPECrate®2017\_fp\_base = 948

### FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

### SPECrate®2017\_fp\_peak = 951

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

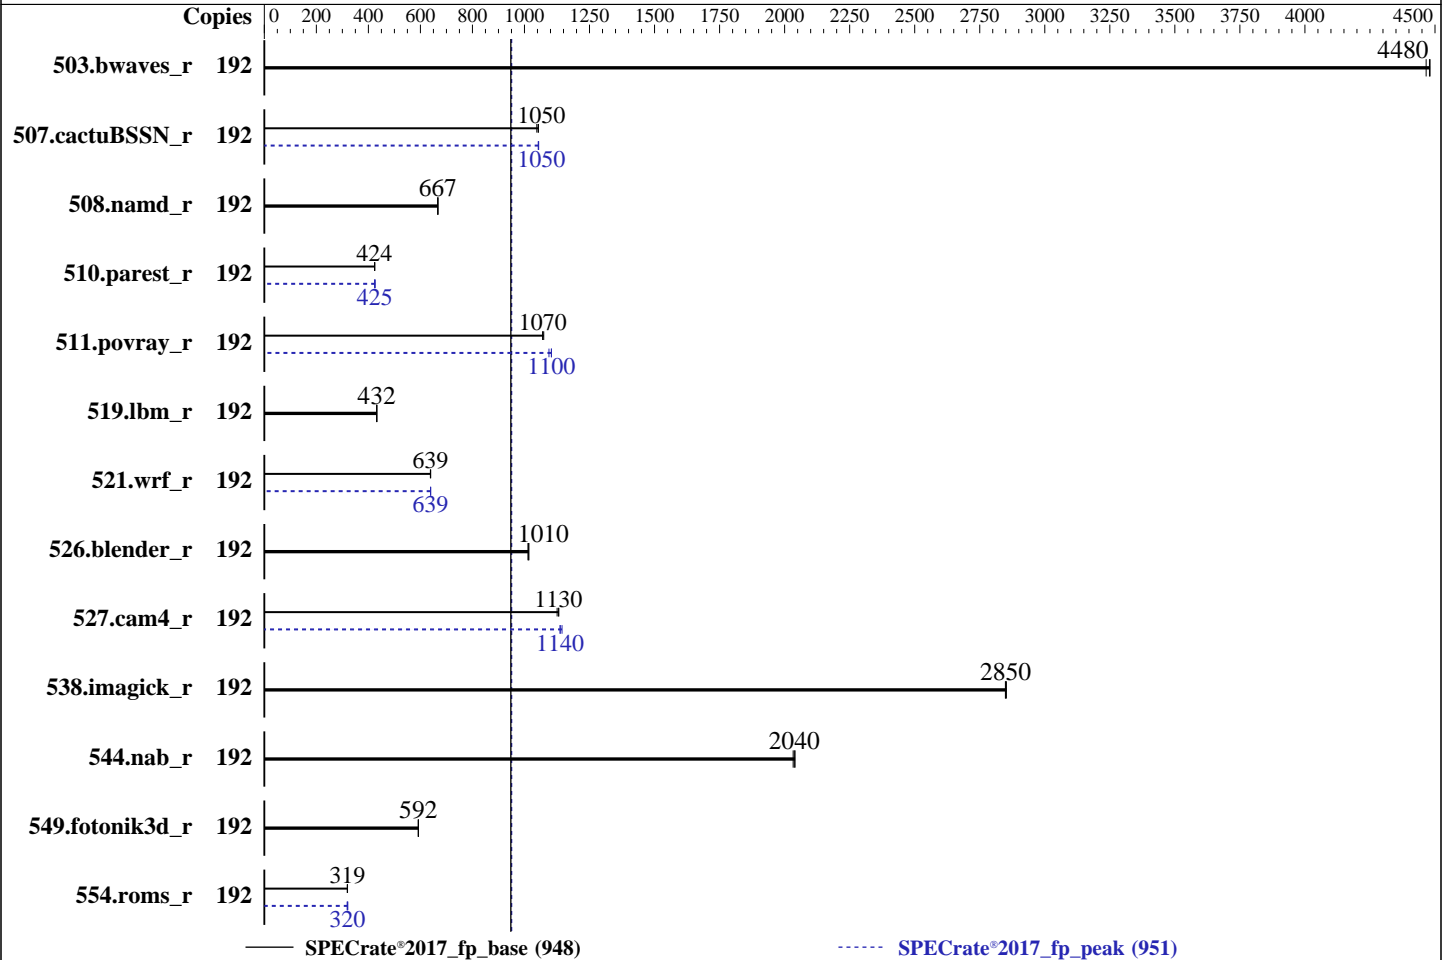

### Hardware

CPU Name: Intel Xeon Platinum 8468H  
 Max MHz: 3800  
 Nominal: 2100  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 1920 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 2.00.55 Released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 948

FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = 951

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jun-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	430	4480	431	4470	<b>430</b>	<b>4480</b>	192	430	4480	431	4470	<b>430</b>	<b>4480</b>
507.cactuBSSN_r	192	<b>231</b>	<b>1050</b>	232	1050	231	1050	192	231	1050	230	1050	<b>231</b>	<b>1050</b>
508.namd_r	192	273	667	<b>273</b>	<b>667</b>	274	667	192	273	667	<b>273</b>	<b>667</b>	274	667
510.parest_r	192	<b>1185</b>	<b>424</b>	1186	424	1182	425	192	1185	424	<b>1183</b>	<b>425</b>	1179	426
511.povray_r	192	419	1070	<b>419</b>	<b>1070</b>	417	1070	192	406	1100	<b>406</b>	<b>1100</b>	410	1090
519.lbm_r	192	468	432	468	432	<b>468</b>	<b>432</b>	192	468	432	468	432	<b>468</b>	<b>432</b>
521.wrf_r	192	<b>673</b>	<b>639</b>	674	638	672	640	192	673	639	673	639	<b>673</b>	<b>639</b>
526.blender_r	192	287	1020	288	1010	<b>288</b>	<b>1010</b>	192	287	1020	288	1010	<b>288</b>	<b>1010</b>
527.cam4_r	192	297	1130	<b>297</b>	<b>1130</b>	298	1130	192	293	1140	<b>295</b>	<b>1140</b>	295	1140
538.imagick_r	192	168	2850	167	2850	<b>168</b>	<b>2850</b>	192	168	2850	167	2850	<b>168</b>	<b>2850</b>
544.nab_r	192	158	2040	159	2030	<b>159</b>	<b>2040</b>	192	158	2040	159	2030	<b>159</b>	<b>2040</b>
549.fotonik3d_r	192	1263	592	<b>1263</b>	<b>592</b>	1265	592	192	1263	592	<b>1263</b>	<b>592</b>	1265	592
554.roms_r	192	<b>955</b>	<b>319</b>	954	320	956	319	192	951	321	958	318	<b>954</b>	<b>320</b>

SPECrate®2017\_fp\_base = 948

SPECrate®2017\_fp\_peak = 951

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec2017-1.1.9-ic2023/lib/intel64:/home/spec2017-1.1.9-ic2023/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 948

FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/spec2017-1.1.9-ic2023/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Fri Jun 16 19:32:29 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

2. w  
19:32:29 up 6:42, 3 users, load average: 51.63, 146.94, 174.69  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 13:34 5:57m 1.26s 0.07s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 948

### FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

## SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
root pts/0 18:21 1:08m 0.08s 0.08s -bash
root pts/1 18:52 39:57 0.13s 0.13s -bash
```

#### 3. Username

From environment variable \$USER: root

#### 4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060079
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060079
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

#### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 192 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg
--define smt-on --define cores=96 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak --iterations 3 -o all fprate
runcpu --define default-platform-flags --copies 192 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --iterations 3 --output_format all
--nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.076/templogs/preenv.fprate.076.0.log --lognum 076.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2017-1.1.9-ic2023
```

#### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000111
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 48
siblings        : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 948

### FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

## SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

physical id 1: apicids 128-223

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Platinum 8468H
BIOS Model name:       Intel(R) Xeon(R) Platinum 8468H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):              2
Stepping:               8
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             4.5 MiB (96 instances)
L1i cache:             3 MiB (96 instances)
L2 cache:              192 MiB (96 instances)
L3 cache:              210 MiB (2 instances)
NUMA node(s):          8
NUMA node0 CPU(s):    0-11,96-107
NUMA node1 CPU(s):    12-23,108-119
NUMA node2 CPU(s):    24-35,120-131
NUMA node3 CPU(s):    36-47,132-143
NUMA node4 CPU(s):    48-59,144-155
NUMA node5 CPU(s):    60-71,156-167
NUMA node6 CPU(s):    72-83,168-179
NUMA node7 CPU(s):    84-95,180-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 948

### FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

## SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 63568 MB
node 0 free: 50372 MB
node 1 cpus: 12-23,108-119
node 1 size: 64506 MB
node 1 free: 54686 MB
node 2 cpus: 24-35,120-131
node 2 size: 64506 MB
node 2 free: 54625 MB
node 3 cpus: 36-47,132-143
node 3 size: 64470 MB
node 3 free: 54635 MB
node 4 cpus: 48-59,144-155
node 4 size: 64506 MB
node 4 free: 51175 MB
node 5 cpus: 60-71,156-167
node 5 size: 64506 MB
node 5 free: 54690 MB
node 6 cpus: 72-83,168-179
node 6 size: 64506 MB
node 6 free: 51304 MB
node 7 cpus: 84-95,180-191
node 7 size: 64486 MB
node 7 free: 54642 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

MemTotal: 527421276 kB

10. who -r

run-level 3 Jun 16 12:50

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 948

### FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

## SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

11. Systemd service manager version: systemd 250 (250-6.e19\_0)  
Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond  
dbus-broker getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname  
rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd sysstat  
systemd-network-generator tuned udisks2 upower  
enabled-runtime systemd-remount-fs  
disabled arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell firewallld  
kvm\_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild  
serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.e19\_0.x86\_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap

15. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

16. tuned-adm active  
Current active profile: throughput-performance

17. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 948

FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
21. Disk information
SPEC is set to: /home/spec2017-1.1.9-ic2023
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   1.7T 144G 1.6T   9% /home

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:          XFUSION
Product:         1288H V7
Product Family: Eagle Stream
Serial:          serial

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

```

```

-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      XFUSION
BIOS Version:     2.00.55

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 948

FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

BIOS Date: 03/07/2023  
BIOS Revision: 0.55

### Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran   | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_fp\_base = 948**

FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

**SPECrate®2017\_fp\_peak = 951**

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 948

FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_fp\_base = 948

FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 948

FusionServer 1288H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = 951

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-16 07:32:28-0400.

Report generated on 2023-07-19 16:20:59 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.