



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 14.6

### PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

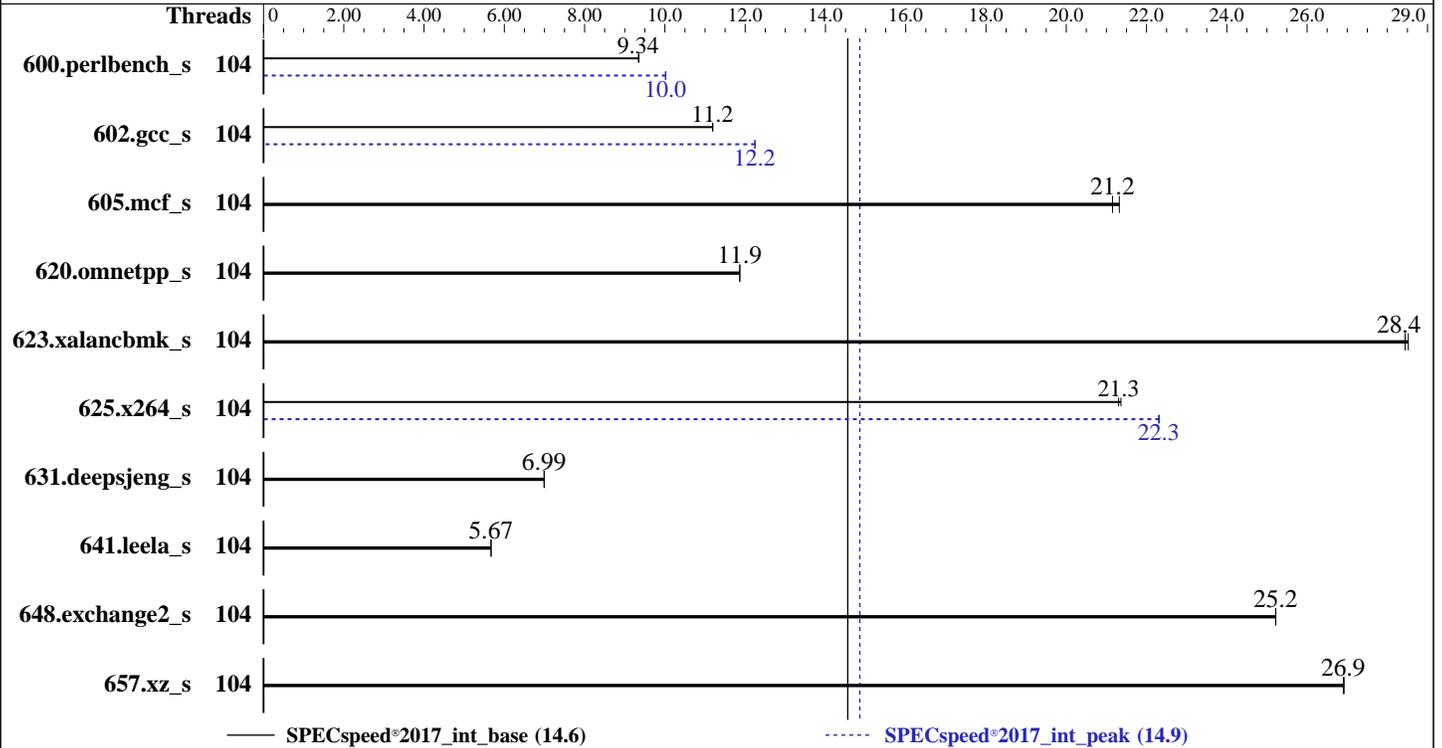

### Hardware

CPU Name: Intel Xeon Platinum 8470  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 104 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 70 GB on tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Version 1.3.2 released Mar-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Feb-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	104	190	9.36	<b>190</b>	<b>9.34</b>			104	<b>177</b>	<b>10.0</b>	177	10.0		
602.gcc_s	104	356	11.2	<b>356</b>	<b>11.2</b>			104	<b>325</b>	<b>12.2</b>	325	12.2		
605.mcf_s	104	221	21.3	<b>223</b>	<b>21.2</b>			104	221	21.3	<b>223</b>	<b>21.2</b>		
620.omnetpp_s	104	137	11.9	<b>137</b>	<b>11.9</b>			104	137	11.9	<b>137</b>	<b>11.9</b>		
623.xalancbmk_s	104	<b>49.8</b>	<b>28.4</b>	49.7	28.5			104	<b>49.8</b>	<b>28.4</b>	49.7	28.5		
625.x264_s	104	<b>82.8</b>	<b>21.3</b>	82.6	21.4			104	79.0	22.3	<b>79.1</b>	<b>22.3</b>		
631.deepsjeng_s	104	<b>205</b>	<b>6.99</b>	205	6.99			104	<b>205</b>	<b>6.99</b>	205	6.99		
641.leela_s	104	<b>301</b>	<b>5.67</b>	301	5.67			104	<b>301</b>	<b>5.67</b>	301	5.67		
648.exchange2_s	104	<b>117</b>	<b>25.2</b>	117	25.2			104	<b>117</b>	<b>25.2</b>	117	25.2		
657.xz_s	104	230	26.9	<b>230</b>	<b>26.9</b>			104	230	26.9	<b>230</b>	<b>26.9</b>		

SPECspeed®2017\_int\_base = **14.6**

SPECspeed®2017\_int\_peak = **14.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Feb-2023  
Software Availability: Dec-2022

## General Notes (Continued)

Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

ADDC Setting : Disabled  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled  
Logical Processor : Disabled  
Virtualization Technology : Disabled  
Sub NUMA Cluster : 2-way Clustering  
Optimizer Mode : Enabled  
  
System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sun May 14 06:02:48 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
06:02:48 up 2 min, 1 user, load average: 0.43, 0.24, 0.10
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1    -              06:01      22.00s     0.93s     0.00s     /bin/bash ./dell-run-speccpu.sh speed
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt

```

```

3. Username
From environment variable $USER: root

```

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124599
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 4124599
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd linux --switched-root --system --deserialize 34
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Feb-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=104 --tune base,peak -o all --define
intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define
DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2
--output_format csv,html,pdf,txt intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=104 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc
--define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2
--output_format csv,html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed intspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/temlogs/preenv.intspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8470
vendor_id      : GenuineIntel
cpu family      : 6
model          : 143
stepping       : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaps
cpu cores      : 52
siblings       : 52
2 physical ids (chips)
104 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 104
On-line CPU(s) list: 0-103
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8470
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 52
Socket(s): 2
Stepping: 8
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 14.6

## PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** May-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

```
L1d cache: 4.9 MiB (104 instances)
L1i cache: 3.3 MiB (104 instances)
L2 cache: 208 MiB (104 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100
NUMA node1 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100
node 0 size: 257422 MB
node 0 free: 246772 MB
node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102
node 1 size: 258041 MB
node 1 free: 257708 MB
node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101
node 2 size: 258041 MB
node 2 free: 257756 MB
node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103
node 3 size: 257669 MB
node 3 free: 257462 MB
node distances:
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 14.6

## PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** May-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

node	0	1	2	3
0:	10	12	21	21
1:	12	10	21	21
2:	21	21	10	12
3:	21	21	12	10

```
-----
9. /proc/meminfo
   MemTotal:      1055921752 kB
-----
```

```
-----
10. who -r
    run-level 3 May 14 06:00
-----
```

```
-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target   Status
    multi-user       running
-----
```

```
-----
12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
                                     nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked
                                     wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime                      systemd-remount-fs
disabled                             autofsd autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                                     chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm
                                     grub2-once haveged-switch-root ipmi ipmievld issue-add-ssh-keys kexec-load lunmask
                                     man-db-create multipathd nfs nfs-blkmap nvme-fc-autoconnect rdisc rpcbind rpmconfigcheck
                                     rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                                     systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect                             wickedd
-----
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=16362246-1892-42a0-9119-ef57f22891af
linux
splash=silent
resume=/dev/disk/by-uuid/c0830e3c-adf5-4663-81bb-2d24c777d423
mitigations=auto
quiet
security=apparmor
crashkernel=309M,high
crashkernel=72M,low
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Feb-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```

vm.compaction_proactiveness      20
vm.dirty_background_bytes        0
vm.dirty_background_ratio        10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs       tmpfs 70G  4.2G  66G   6% /mnt/ramdisk

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge C6620
Product Family: PowerEdge
Serial:      SC662L1

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Feb-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

16x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.3.2  
BIOS Date: 03/28/2023  
BIOS Revision: 1.3

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Feb-2023  
Software Availability: Dec-2022

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:  
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:  
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:  
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.6

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_peak = 14.9

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-14 06:02:47-0400.

Report generated on 2024-01-29 17:56:56 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.