



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710  
SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358


Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Jun-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

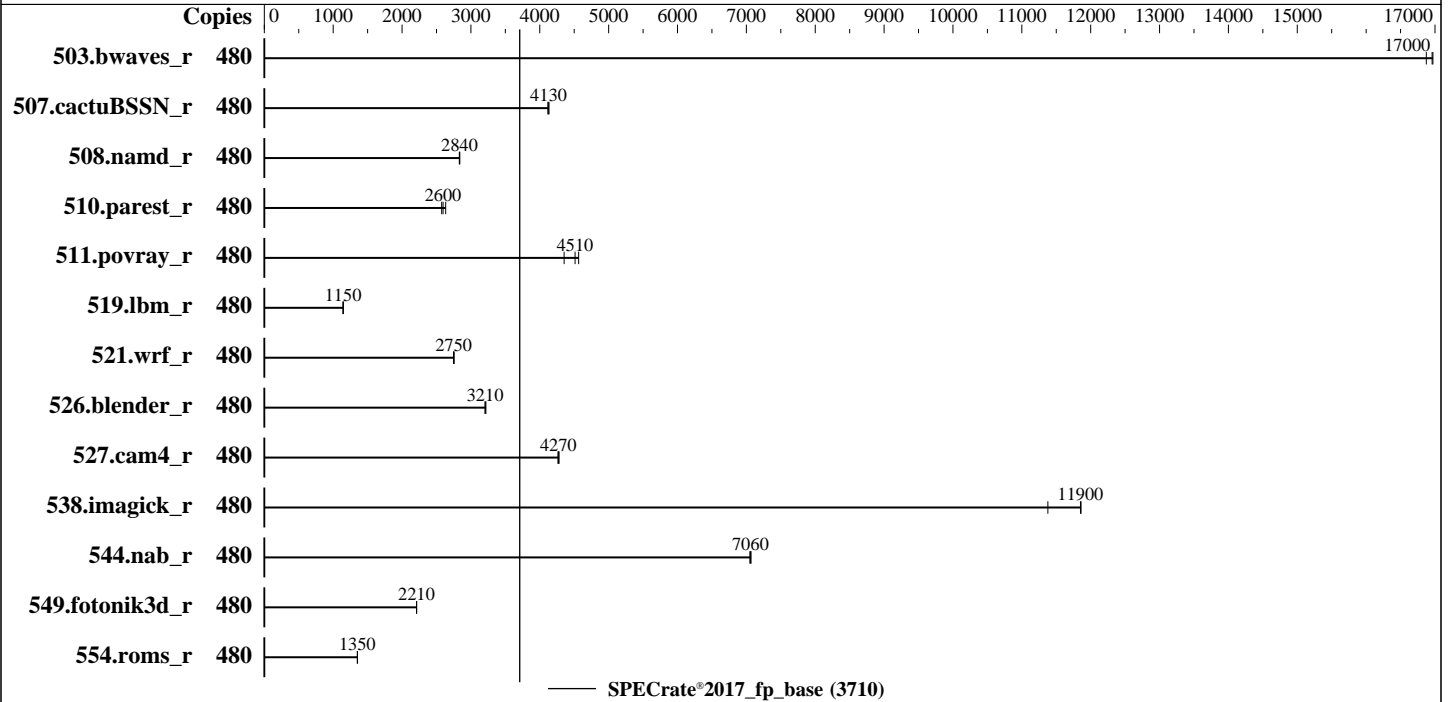

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
 Max MHz: 3500  
 Nominal: 1900  
 Enabled: 480 cores, 8 chips  
 Orderable: 2,4,8 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 112.5 MB I+D on chip per chip  
 Other: None  
 Memory: 2 TB (64 x 32 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 3.2 TB NVME SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 5.14.0-70.22.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 05.00.00 released Apr-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Jun-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	480	<b>284</b>	<b>17000</b>	284	17000	285	16900							
507.cactuBSSN_r	480	148	4120	<b>147</b>	<b>4130</b>	147	4130							
508.namd_r	480	161	2840	<b>161</b>	<b>2840</b>	161	2830							
510.parest_r	480	<b>484</b>	<b>2600</b>	477	2630	488	2580							
511.povray_r	480	<b>248</b>	<b>4510</b>	257	4350	246	4560							
519.lbm_r	480	442	1150	<b>442</b>	<b>1150</b>	442	1140							
521.wrf_r	480	390	2760	391	2750	<b>391</b>	<b>2750</b>							
526.blender_r	480	227	3220	<b>228</b>	<b>3210</b>	228	3210							
527.cam4_r	480	196	4280	197	4260	<b>197</b>	<b>4270</b>							
538.imagick_r	480	105	11400	<b>101</b>	<b>11900</b>	101	11900							
544.nab_r	480	115	7050	<b>114</b>	<b>7060</b>	114	7070							
549.fotonik3d_r	480	846	2210	846	2210	<b>846</b>	<b>2210</b>							
554.roms_r	480	<b>564</b>	<b>1350</b>	564	1350	565	1350							

SPECrate®2017\_fp\_base = 3710

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/19cpu2017/lib/intel64:/home/19cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Jun-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to SNC4

Intel Hyper Threading Technology set to Disabled

Sysinfo program /home/19cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Wed Jun 28 17:31:53 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.22.1.el9\_0.x86\_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Jun-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

-----
2. w
   17:31:53 up 5 min,  1 user,  load average: 0.16, 0.19, 0.10
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1    17:27   9.00s  1.22s  0.02s -bash

```

```

-----
3. Username
   From environment variable $USER:  root

```

```

-----
4. ulimit -a
   real-time non-blocking time (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size                (kbytes, -d) unlimited
   scheduling priority          (-e) 0
   file size                    (blocks, -f) unlimited
   pending signals              (-i) 8254923
   max locked memory            (kbytes, -l) 64
   max memory size              (kbytes, -m) unlimited
   open files                   (-n) 1024
   pipe size                    (512 bytes, -p) 8
   POSIX message queues        (bytes, -q) 819200
   real-time priority           (-r) 0
   stack size                   (kbytes, -s) unlimited
   cpu time                     (seconds, -t) unlimited
   max user processes           (-u) 8254923
   virtual memory               (kbytes, -v) unlimited
   file locks                   (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   -bash
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
     ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=480 --define physicalfirst --define
     invoke_with_interleave --define drop_caches --tune base -o all fprate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
     ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=480 --define physicalfirst --define
     invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode rate
     --tune base --size refrate fprate --noprerev --note-preenv --logfile
     $SPEC/tmp/CPU2017.013/temlogs/preenv.fprate.013.0.log --lognum 013.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/19cpu2017

```

```

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Platinum 8490H
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 143
   stepping       : 6
   microcode      : 0x2b0001b0
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores      : 60
   siblings       : 60
   8 physical ids (chips)
   480 processors (hardware threads)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017\_fp\_base = 3710

TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Jul-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

## Platform Notes (Continued)

```

physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 4: core ids 0-59
physical id 5: core ids 0-59
physical id 6: core ids 0-59
physical id 7: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364,366,368,370,372,374
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,488,490,492,494,496,498,500,502
physical id 4: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,616,618,620,622,624,626,628,630
physical id 5: apicids
640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758
physical id 6: apicids
768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,820,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852,854,856,858,860,862,864,866,868,870,872,874,876,878,880,882,884,886
physical id 7: apicids
896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,936,938,940,942,944,946,948,950,952,954,956,958,960,962,964,966,968,970,972,974,976,978,980,982,984,986,988,990,992,994,996,998,1000,1002,1004,1006,1008,1010,1012,1014

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 480
On-line CPU(s) list: 0-479
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8490H
BIOS Model name: Intel(R) Xeon(R) Platinum 8490H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 60

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017\_fp\_base = 3710

TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Jul-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

## Platform Notes (Continued)

```

Socket(s): 8
Stepping: 6
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic
movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_llid arch_capabilities

L1d cache: 22.5 MiB (480 instances)
L1i cache: 15 MiB (480 instances)
L2 cache: 960 MiB (480 instances)
L3 cache: 900 MiB (8 instances)
NUMA node(s): 32
NUMA node0 CPU(s): 0-14
NUMA node1 CPU(s): 15-29
NUMA node2 CPU(s): 30-44
NUMA node3 CPU(s): 45-59
NUMA node4 CPU(s): 60-74
NUMA node5 CPU(s): 75-89
NUMA node6 CPU(s): 90-104
NUMA node7 CPU(s): 105-119
NUMA node8 CPU(s): 120-134
NUMA node9 CPU(s): 135-149
NUMA node10 CPU(s): 150-164
NUMA node11 CPU(s): 165-179
NUMA node12 CPU(s): 180-194
NUMA node13 CPU(s): 195-209
NUMA node14 CPU(s): 210-224
NUMA node15 CPU(s): 225-239
NUMA node16 CPU(s): 240-254
NUMA node17 CPU(s): 255-269
NUMA node18 CPU(s): 270-284
NUMA node19 CPU(s): 285-299
NUMA node20 CPU(s): 300-314
NUMA node21 CPU(s): 315-329
NUMA node22 CPU(s): 330-344
NUMA node23 CPU(s): 345-359
NUMA node24 CPU(s): 360-374
NUMA node25 CPU(s): 375-389
NUMA node26 CPU(s): 390-404
NUMA node27 CPU(s): 405-419
NUMA node28 CPU(s): 420-434
NUMA node29 CPU(s): 435-449
NUMA node30 CPU(s): 450-464
NUMA node31 CPU(s): 465-479
Vulnerability Itlb multihit: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Jun-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

Vulnerability Llthf: Not affected  
 Vulnerability Mds: Not affected  
 Vulnerability Meltdown: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	22.5M	12	Data	1	64	1	64
L1i	32K	15M	8	Instruction	1	64	1	64
L2	2M	960M	16	Unified	2	2048	1	64
L3	112.5M	900M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)

node 0 cpus: 0-14  
 node 0 size: 64066 MB  
 node 0 free: 63037 MB  
 node 1 cpus: 15-29  
 node 1 size: 64508 MB  
 node 1 free: 63850 MB  
 node 2 cpus: 30-44  
 node 2 size: 64508 MB  
 node 2 free: 64332 MB  
 node 3 cpus: 45-59  
 node 3 size: 64508 MB  
 node 3 free: 64342 MB  
 node 4 cpus: 60-74  
 node 4 size: 64472 MB  
 node 4 free: 64318 MB  
 node 5 cpus: 75-89  
 node 5 size: 64508 MB  
 node 5 free: 64373 MB  
 node 6 cpus: 90-104  
 node 6 size: 64508 MB  
 node 6 free: 64352 MB  
 node 7 cpus: 105-119  
 node 7 size: 64508 MB  
 node 7 free: 64357 MB  
 node 8 cpus: 120-134  
 node 8 size: 64508 MB  
 node 8 free: 64021 MB  
 node 9 cpus: 135-149  
 node 9 size: 64508 MB  
 node 9 free: 64079 MB  
 node 10 cpus: 150-164  
 node 10 size: 64508 MB  
 node 10 free: 64081 MB  
 node 11 cpus: 165-179  
 node 11 size: 64508 MB  
 node 11 free: 63435 MB  
 node 12 cpus: 180-194  
 node 12 size: 64508 MB  
 node 12 free: 64358 MB  
 node 13 cpus: 195-209

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017\_fp\_base = 3710

TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Jul-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

## Platform Notes (Continued)

```

node 13 size: 64508 MB
node 13 free: 64324 MB
node 14 cpus: 210-224
node 14 size: 64508 MB
node 14 free: 64370 MB
node 15 cpus: 225-239
node 15 size: 64508 MB
node 15 free: 64346 MB
node 16 cpus: 240-254
node 16 size: 64508 MB
node 16 free: 64326 MB
node 17 cpus: 255-269
node 17 size: 64508 MB
node 17 free: 64363 MB
node 18 cpus: 270-284
node 18 size: 64508 MB
node 18 free: 64328 MB
node 19 cpus: 285-299
node 19 size: 64508 MB
node 19 free: 64372 MB
node 20 cpus: 300-314
node 20 size: 64508 MB
node 20 free: 64357 MB
node 21 cpus: 315-329
node 21 size: 64508 MB
node 21 free: 64351 MB
node 22 cpus: 330-344
node 22 size: 64508 MB
node 22 free: 64349 MB
node 23 cpus: 345-359
node 23 size: 64508 MB
node 23 free: 64367 MB
node 24 cpus: 360-374
node 24 size: 64508 MB
node 24 free: 64291 MB
node 25 cpus: 375-389
node 25 size: 64508 MB
node 25 free: 64348 MB
node 26 cpus: 390-404
node 26 size: 64508 MB
node 26 free: 64324 MB
node 27 cpus: 405-419
node 27 size: 64508 MB
node 27 free: 64326 MB
node 28 cpus: 420-434
node 28 size: 64508 MB
node 28 free: 64370 MB
node 29 cpus: 435-449
node 29 size: 64508 MB
node 29 free: 64369 MB
node 30 cpus: 450-464
node 30 size: 64508 MB
node 30 free: 64340 MB
node 31 cpus: 465-479
node 31 size: 64479 MB
node 31 free: 64343 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
0: 10 12 12 12 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21

```

(Continued on next page)







# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710  
SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.  
**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Jun-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
21 21 21 12 12 10 12
31: 31 31 31 31 21 21 21 21 21 21 21 31 31 31 31 31 31 21 21 21 21 21
21 21 21 12 12 12 10
```

9. /proc/meminfo  
MemTotal: 2113300780 kB

10. who -r  
run-level 3 Jun 28 17:27

11. Systemd service manager version: systemd 250 (250-6.el9\_0)  
Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond  
dbus-broker firewalld getty@ kdump lvm2-monitor mdmonitor microcode nis-domainname  
rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned  
udisks2 upower  
enabled-runtime systemd-remount-fs  
disabled blk-availability canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell irqbalance  
kvm\_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild  
serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9\_0.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap

15. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.50 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

16. tuned-adm active  
Current active profile: throughput-performance

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Jun-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

### 17. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              10
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

```

### 18. /sys/kernel/mm/transparent\_hugepage

```

defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

### 19. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

### 20. OS release

```

From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

### 21. Disk information

SPEC is set to: /home/19cpu2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   2.9T  600G  2.3T  21% /home

```

### 22. /sys/devices/virtual/dmi/id

```

Vendor:      IEI
Product:     TS860G7
Product Family: Not specified
Serial:      000000000

```

### 23. dmidecode

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710  
SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.  
**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Jun-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
64x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800

-----  
24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 05.00.00  
BIOS Date: 04/07/2023

## Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Jun-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.

**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Jun-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Dec-2022

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
TS860G7 (Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 3710  
SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd.

**Tested by:** Inspur Electronic Information Industry Co., Ltd.

**Test Date:** Jun-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-28 17:31:52-0400.

Report generated on 2023-07-19 16:27:44 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.