



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573


Test Date: Jun-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

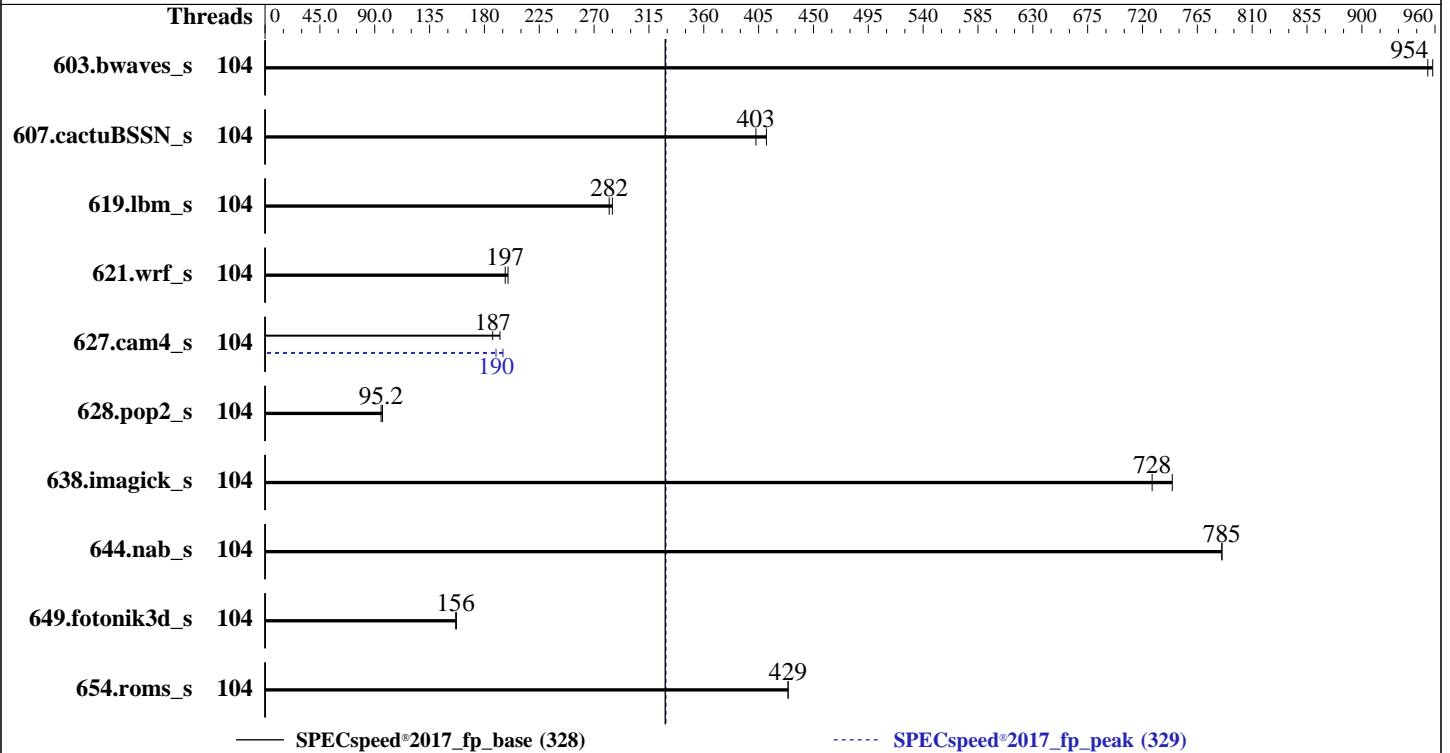

Hardware

CPU Name: Intel Xeon Platinum 8470
 Max MHz: 3800
 Nominal: 2000
 Enabled: 104 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 70 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 1.2.1 released May-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECSpeed®2017_fp_peak = 329

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|-----------------|---------|--------------------|--------------------|--------------------|-------------------|---------|-------|---------|--------------------|--------------------|--------------------|-------------------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 104 | <u>61.8</u> | <u>954</u> | 61.6 | 958 | | | 104 | <u>61.8</u> | <u>954</u> | 61.6 | 958 | | |
| 607.cactuBSSN_s | 104 | <u>41.4</u> | <u>403</u> | 40.5 | 411 | | | 104 | <u>41.4</u> | <u>403</u> | 40.5 | 411 | | |
| 619.lbm_s | 104 | 18.4 | 285 | <u>18.5</u> | <u>282</u> | | | 104 | 18.4 | 285 | <u>18.5</u> | <u>282</u> | | |
| 621.wrf_s | 104 | <u>67.1</u> | <u>197</u> | 66.3 | 199 | | | 104 | <u>67.1</u> | <u>197</u> | 66.3 | 199 | | |
| 627.cam4_s | 104 | <u>47.5</u> | <u>187</u> | 46.0 | 193 | | | 104 | <u>46.8</u> | <u>190</u> | 45.4 | 195 | | |
| 628.pop2_s | 104 | <u>125</u> | <u>95.2</u> | 123 | 96.3 | | | 104 | <u>125</u> | <u>95.2</u> | 123 | 96.3 | | |
| 638.imagick_s | 104 | 19.4 | 744 | <u>19.8</u> | <u>728</u> | | | 104 | 19.4 | 744 | <u>19.8</u> | <u>728</u> | | |
| 644.nab_s | 104 | <u>22.3</u> | <u>785</u> | 22.3 | 785 | | | 104 | <u>22.3</u> | <u>785</u> | 22.3 | 785 | | |
| 649.fotonik3d_s | 104 | 58.0 | 157 | <u>58.3</u> | <u>156</u> | | | 104 | 58.0 | 157 | <u>58.3</u> | <u>156</u> | | |
| 654.roms_s | 104 | <u>36.7</u> | <u>429</u> | 36.7 | 429 | | | 104 | <u>36.7</u> | <u>429</u> | 36.7 | 429 | | |

SPECSpeed®2017_fp_base = 328

SPECSpeed®2017_fp_peak = 329

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECSpeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes

BIOS settings:

ADDDC Setting : Disabled
 DIMM Self Healing on
 Uncorrectable Memory Error : Disabled
 Logical Processor : Disabled
 Virtualization Technology : Disabled
 Sub NUMA Cluster : 2-way Clustering

System Profile : Custom
 CPU Power Management : Maximum Performance
 CLE : Disabled
 C States : Autonomous
 Memory Patrol Scrub : Disabled
 Energy Efficiency Policy : Performance
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Jun 27 12:14:00 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w
12:14:00 up 2:17, 2 users, load average: 6.11, 6.36, 3.77
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
root      :      :      09:57  ?xdm?  3:13  0.01s  gdm-session-worker [pam/gdm-password]
root      :1     :1     09:57  ?xdm?  3:13  0.00s  /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124600
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 4124600
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/usr/lib/systemd/systemd --user
/usr/lib/gnome-terminal-server
bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5
--output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5
--output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=104 --tune base,peak -o all --define
drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define
DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5 --output_format
csv,html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=104 --tune base,peak --output_format all
--define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5
--output_format csv,html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed fpspeed
--nopreenv --note-preenv --logfile $$SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0
--from_runcpu 2
specperl $$SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

6. /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8470

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

vendor_id      : GenuineIntel
cpu family    : 6
model         : 143
stepping      : 8
microcode     : 0x2b0004b1
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 52
siblings      : 52
2 physical ids (chips)
104 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                104
On-line CPU(s) list:  0-103
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8470
CPU family:            6
Model:                143
Thread(s) per core:   1
Core(s) per socket:   52
Socket(s):             2
Stepping:              8
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                      avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                      arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                      bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                      tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

L1d cache:            4.9 MiB (104 instances)
L1i cache:            3.3 MiB (104 instances)
L2 cache:             208 MiB (104 instances)
L3 cache:             210 MiB (2 instances)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node(s): 4
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,38,42,46,50,54,58,62,66,70,74,78,82,86,90,96,100
NUMA node1 CPU(s): 2,6,10,14,18,22,26,30,34,40,44,48,52,56,60,64,68,72,76,80,84,88,92,94,98,102
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,35,39,43,47,51,55,59,65,69,73,75,79,83,87,93,97,101
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,37,41,45,49,53,57,61,63,67,71,77,81,85,89,91,95,99,103
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d | 48K | 4.9M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 3.3M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 208M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 105M | 210M | 15 | Unified | 3 | 114688 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,38,42,46,50,54,58,62,66,70,74,78,82,86,90,96,100
node 0 size: 257421 MB
node 0 free: 247486 MB
node 1 cpus: 2,6,10,14,18,22,26,30,34,40,44,48,52,56,60,64,68,72,76,80,84,88,92,94,98,102
node 1 size: 258041 MB
node 1 free: 257414 MB
node 2 cpus: 1,5,9,13,17,21,25,29,33,35,39,43,47,51,55,59,65,69,73,75,79,83,87,93,97,101
node 2 size: 258006 MB
node 2 free: 257448 MB
node 3 cpus: 3,7,11,15,19,23,27,31,37,41,45,49,53,57,61,63,67,71,77,81,85,89,91,95,99,103
node 3 size: 257705 MB
node 3 free: 256890 MB
node distances:
node  0  1  2  3
 0:  10 12 21 21
 1:  12 10 21 21
 2:  21 21 10 12
 3:  21 21 12 10

```

9. /proc/meminfo

MemTotal: 1055923516 kB

10. who -r

run-level 5 Jun 27 09:57

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Date: Jun-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

graphical running

12. Services, from `systemctl list-unit-files`

| STATE | UNIT FILES |
|-----------------|--|
| enabled | ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant |
| enabled-runtime | systemd-remount-fs |
| disabled | NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiuiio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nm-cloud-setup nmb nvme-f-autoconnect openvpn@ ostree-remount pppoe pppoe-server rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2 upower wpa_supplicant@ |
| indirect | pcscd saned@ wickedd |

13. Linux kernel boot-time arguments, from `/proc/cmdline`

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=96676a86-8cd3-46ed-9bba-65753961bf30
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=307M,high
crashkernel=72M,low

```

14. `cpupower frequency-info`

```

analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

15. `sysctl`

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 70G  4.2G  66G   6% /mnt/ramdisk

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge XE8640
Product Family: PowerEdge
Serial:          1234567

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.2.1
BIOS Date:        05/17/2023
BIOS Revision:    1.2

```




SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 328

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

627.cam4_s (continued):

```
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-27 12:14:00-0400.

Report generated on 2023-08-16 14:15:18 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.