



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

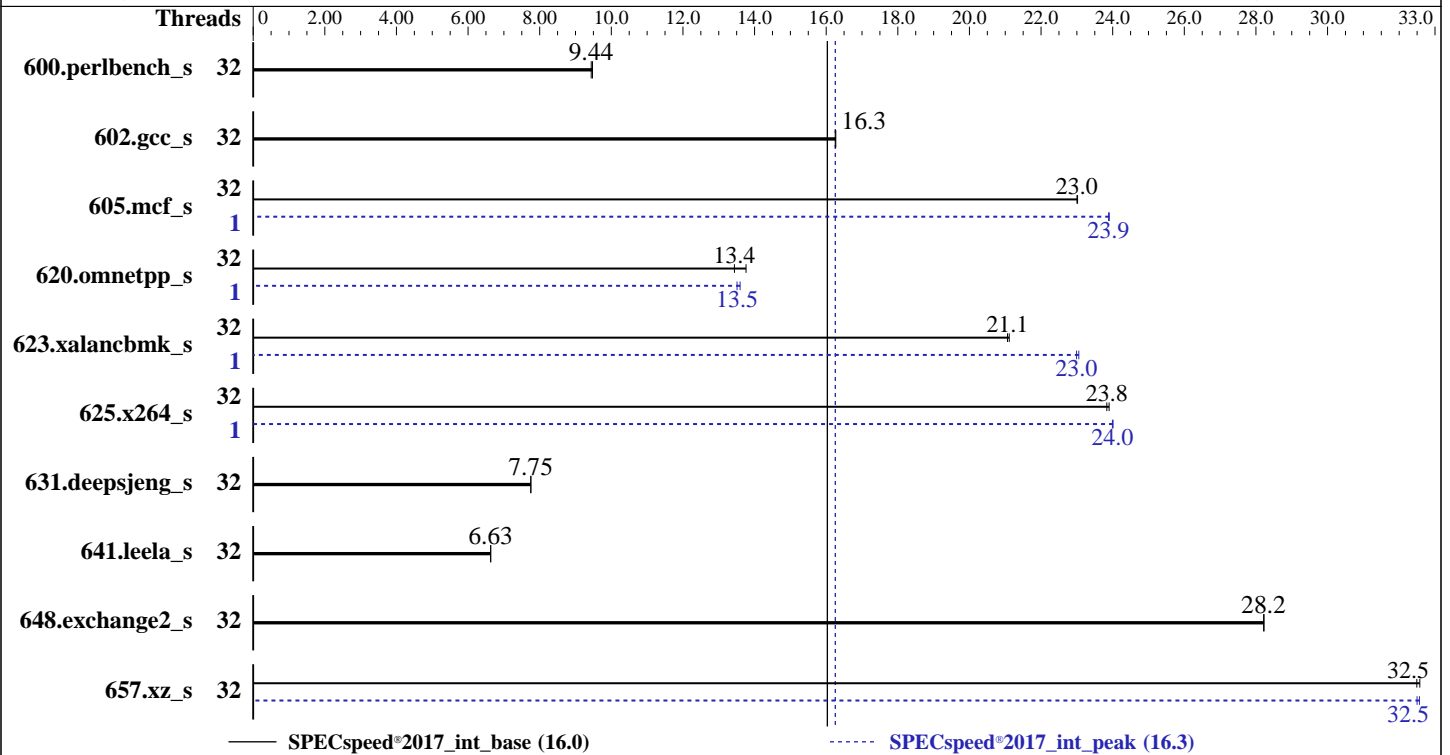

### Hardware

CPU Name: AMD EPYC 9184X  
 Max MHz: 4200  
 Nominal: 3550  
 Enabled: 32 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 768 MB I+D on chip per chip, 96 MB shared / 2 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 40 GB on tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.24.21-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.4.5 released May-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jul-2023  
Hardware Availability: Jul-2023  
Software Availability: Nov-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	<b>188</b>	<b>9.44</b>	187	9.47			32	<b>188</b>	<b>9.44</b>	187	9.47		
602.gcc_s	32	<b>245</b>	<b>16.3</b>	245	16.3			32	<b>245</b>	<b>16.3</b>	245	16.3		
605.mcf_s	32	<b>205</b>	<b>23.0</b>	205	23.0			1	<b>198</b>	<b>23.9</b>	197	23.9		
620.omnetpp_s	32	119	13.8	<b>121</b>	<b>13.4</b>			1	120	13.6	<b>121</b>	<b>13.5</b>		
623.xalancbmk_s	32	<b>67.3</b>	<b>21.1</b>	67.1	21.1			1	<b>61.6</b>	<b>23.0</b>	61.5	23.1		
625.x264_s	32	73.8	23.9	<b>74.0</b>	<b>23.8</b>			1	73.5	24.0	<b>73.5</b>	<b>24.0</b>		
631.deepsjeng_s	32	<b>185</b>	<b>7.75</b>	185	7.76			32	<b>185</b>	<b>7.75</b>	185	7.76		
641.leela_s	32	257	6.63	<b>257</b>	<b>6.63</b>			32	257	6.63	<b>257</b>	<b>6.63</b>		
648.exchange2_s	32	<b>104</b>	<b>28.2</b>	104	28.2			32	<b>104</b>	<b>28.2</b>	104	28.2		
657.xz_s	32	<b>190</b>	<b>32.5</b>	190	32.6			32	190	32.6	<b>190</b>	<b>32.5</b>		

SPECspeed®2017\_int\_base = **16.0**

SPECspeed®2017\_int\_peak = **16.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
    DRAM Refresh Delay : Performance
    DIMM Self Healing on
Uncorrectable Memory Error : Disabled
    Logical Processor : Disabled
Virtualization Technology : Disabled
    NUMA Nodes per Socket : 4
    L3 Cache as NUMA Domain : Enabled
```

```
    System Profile : Custom
    C-States : Disabled
Memory Patrol Scrub : Disabled
    PCI ASPM L1 Link
    Power Management : Disabled
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

Determinism Slider : Power Determinism  
Algorithm Performance  
Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Jul 19 01:27:59 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.12+suse.135.g7b70d88264)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.24.21-default #1 SMP PREEMPT_DYNAMIC Wed Sep 7 06:51:18 UTC 2022 (974d0aa)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:27:59 up 3 min, 1 user, load average: 0.87, 0.83, 0.37
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 01:27 39.00s 1.36s 0.31s /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6190787
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

max locked memory      (kbytes, -l) 2097152
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 6190787
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-VERS=v4.6 --output_format html,pdf,txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --define DL-VERS=v4.6 --output_format html,pdf,txt intspeer
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --define DL-VERS=v4.6 --output_format html,pdf,txt --nopower --runmode speed --tune
base:peak --size test:train:refspeed intspeer --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeer.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1

```

#### 6. /proc/cpuinfo

```

model name      : AMD EPYC 9184X 16-Core Processor
vendor_id      : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa101135
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores       : 16
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 1: core ids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 0: apicids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 1: apicids 128-129,144-145,160-161,176-177,192-193,208-209,224-225,240-241
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

#### 7. lscpu

From lscpu from util-linux 2.37.2:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       32
On-line CPU(s) list:         0-31
Vendor ID:                    AuthenticAMD
Model name:                   AMD EPYC 9184X 16-Core Processor
CPU family:                   25
Model:                        17
Thread(s) per core:          1
Core(s) per socket:          16
Socket(s):                    2
Stepping:                     1
Frequency boost:              enabled
CPU max MHz:                  3550.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     7102.10
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_omsave_vmload vgif v_spec_ctrl avx512vbmi
                                umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization:               AMD-V
L1d cache:                    1 MiB (32 instances)
L1i cache:                    1 MiB (32 instances)
L2 cache:                     32 MiB (32 instances)
L3 cache:                     1.5 GiB (16 instances)
NUMA node(s):                 8
NUMA node0 CPU(s):           0-3
NUMA node1 CPU(s):           4-7
NUMA node2 CPU(s):           8-11
NUMA node3 CPU(s):           12-15
NUMA node4 CPU(s):           16-19
NUMA node5 CPU(s):           20-23
NUMA node6 CPU(s):           24-27
NUMA node7 CPU(s):           28-31
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:      Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	96M	1.5G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-3
node 0 size: 193079 MB
node 0 free: 192829 MB
node 1 cpus: 4-7
node 1 size: 193533 MB
node 1 free: 193205 MB
node 2 cpus: 8-11
node 2 size: 193533 MB
node 2 free: 190412 MB
node 3 cpus: 12-15
node 3 size: 193517 MB
node 3 free: 192632 MB
node 4 cpus: 16-19
node 4 size: 193533 MB
node 4 free: 193277 MB
node 5 cpus: 20-23
node 5 size: 193533 MB
node 5 free: 193255 MB
node 6 cpus: 24-27
node 6 size: 193499 MB
node 6 free: 193333 MB
node 7 cpus: 28-31
node 7 size: 193494 MB
node 7 free: 193323 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1584872080 kB

10. who -r

run-level 3 Jul 19 01:26

11. Systemd service manager version: systemd 249 (249.12+suse.135.g7b70d88264)

Default Target	Status
multi-user	running

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 6573

Test Date: Jul-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

### 12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
                haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix
                purge-kernels rollback rsyslog smartd sshd tuned wickedd wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell dmraid-activation ebttables
                exchange-bmc-os-info gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
                issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc
                rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd udisks2
indirect       wickedd

```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.24.21-default
root=UUID=2cdc8db2-6b0f-453b-b0a0-3317c903ad65
splash=silent
mitigations=auto
quiet
security=apparmor

```

### 14. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 3.55 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

### 15. tuned-adm active

Current active profile: latency-performance

### 16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

vm.zone_reclaim_mode          1
-----
17. /sys/kernel/mm/transparent_hugepage
   defrag          [always] defer defer+madvise madvise never
   enabled         [always] madvise never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none           511
   max_ptes_shared        256
   max_ptes_swap           64
   pages_to_scan          4096
   scan_sleep_millisecs   10000
-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4
-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1
  Filesystem      Type  Size  Used Avail Use% Mounted on
  tmpfs           tmpfs 40G  3.5G  37G   9% /mnt/ramdisk
-----
21. /sys/devices/virtual/dmi/id
   Vendor:         Dell Inc.
   Product:        PowerEdge R7625
   Product Family: PowerEdge
   Serial:         1234567
-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:      Dell Inc.
  BIOS Version:     1.4.5
  BIOS Date:        05/29/2023
  BIOS Revision:    1.4

```

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

| 657.xz\_s(base, peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
641.leela\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jul-2023  
Hardware Availability: Jul-2023  
Software Availability: Nov-2022

## Base Portability Flags (Continued)

648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang  
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: Same as 605.mcf\_s

657.xz\_s: Same as 605.mcf\_s

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>



# SPEC CPU<sup>®</sup>2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed<sup>®</sup>2017\_int\_base = 16.0

PowerEdge R7625 (AMD EPYC 9184X 16-Core Processor)

SPECspeed<sup>®</sup>2017\_int\_peak = 16.3

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.9 on 2023-07-19 02:27:59-0400.

Report generated on 2023-09-13 14:46:46 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.