



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358


Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

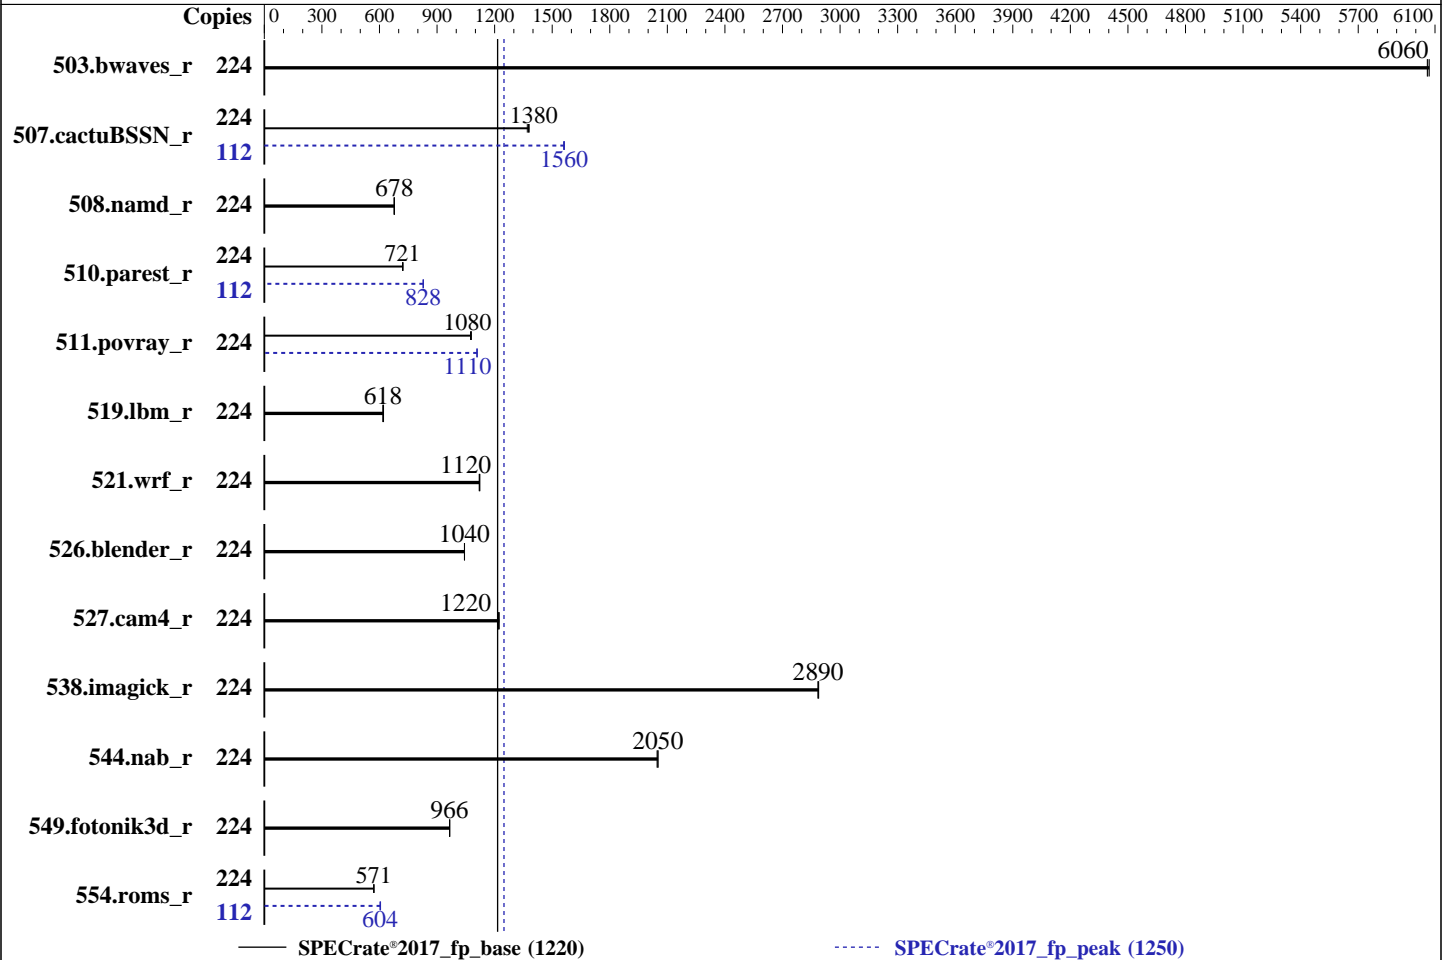

Hardware

CPU Name: Intel Xeon Platinum 8450H
 Max MHz: 3500
 Nominal: 2000
 Enabled: 112 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 75 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 03.00.00 released Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	370	6070	<u>371</u>	<u>6060</u>	371	6060	224	370	6070	<u>371</u>	<u>6060</u>	371	6060
507.cactuBSSN_r	224	207	1370	<u>206</u>	<u>1380</u>	206	1380	112	<u>90.7</u>	<u>1560</u>	90.9	1560	90.7	1560
508.namd_r	224	<u>314</u>	<u>678</u>	314	678	315	676	224	<u>314</u>	<u>678</u>	314	678	315	676
510.parest_r	224	810	723	814	720	<u>813</u>	<u>721</u>	112	354	829	<u>354</u>	<u>828</u>	354	827
511.povray_r	224	485	1080	<u>485</u>	<u>1080</u>	487	1070	224	472	1110	<u>472</u>	<u>1110</u>	472	1110
519.lbm_r	224	380	621	<u>382</u>	<u>618</u>	382	618	224	380	621	<u>382</u>	<u>618</u>	382	618
521.wrf_r	224	447	1120	<u>447</u>	<u>1120</u>	448	1120	224	447	1120	<u>447</u>	<u>1120</u>	448	1120
526.blender_r	224	<u>327</u>	<u>1040</u>	327	1040	327	1040	224	<u>327</u>	<u>1040</u>	327	1040	327	1040
527.cam4_r	224	<u>321</u>	<u>1220</u>	320	1220	322	1220	224	<u>321</u>	<u>1220</u>	320	1220	322	1220
538.imagick_r	224	193	2890	<u>193</u>	<u>2890</u>	193	2890	224	193	2890	<u>193</u>	<u>2890</u>	193	2890
544.nab_r	224	184	2050	184	2050	<u>184</u>	<u>2050</u>	224	184	2050	184	2050	<u>184</u>	<u>2050</u>
549.fotonik3d_r	224	904	966	904	965	<u>904</u>	<u>966</u>	224	904	966	904	965	<u>904</u>	<u>966</u>
554.roms_r	224	<u>623</u>	<u>571</u>	625	570	623	571	112	295	604	<u>295</u>	<u>604</u>	294	606

SPECrate®2017_fp_base = 1220

SPECrate®2017_fp_peak = 1250

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to SNC2

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Aug 25 11:33:19 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.e19_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
11:33:19 up 23:22, 1 user, load average: 133.10, 201.58, 215.06
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358
Test Sponsor: Inspur Electronic Information Industry Co., Ltd.
Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
root      tty1      Thu12    6:41m  1.29s  0.02s  sh
reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
```

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126460
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126460
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=112 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=112 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.011/templogs/preenv.fprate.011.0.log --lognum 011.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8450H
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 6
microcode : 0x2b000130
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores : 28
siblings : 56
4 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-27
physical id 1: core ids 0-27
physical id 2: core ids 0-27

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

physical id 3: core ids 0-27
physical id 0: apicids 0-55
physical id 1: apicids 128-183
physical id 2: apicids 256-311
physical id 3: apicids 384-439

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      224
On-line CPU(s) list:        0-223
Vendor ID:                   GenuineIntel
BIOS Vendor ID:             Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) Platinum 8450H
BIOS Model name:            Intel(R) Xeon(R) Platinum 8450H
CPU family:                  6
Model:                      143
Thread(s) per core:         2
Core(s) per socket:         28
Socket(s):                   4
Stepping:                    6
CPU max MHz:                 3500.0000
CPU min MHz:                 800.0000
BogoMIPS:                    4000.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                              clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                              lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                              nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                              smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic
                              movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                              3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                              intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                              tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                              rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                              avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                              cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                              wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                              avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                              avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                              cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                              arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

L1d cache:                   5.3 MiB (112 instances)
L1i cache:                   3.5 MiB (112 instances)
L2 cache:                    224 MiB (112 instances)
L3 cache:                    300 MiB (4 instances)
NUMA node(s):                16
NUMA node0 CPU(s):          0-6,112-118
NUMA node1 CPU(s):          7-13,119-125
NUMA node2 CPU(s):          14-20,126-132
NUMA node3 CPU(s):          21-27,133-139
NUMA node4 CPU(s):          28-34,140-146
NUMA node5 CPU(s):          35-41,147-153
NUMA node6 CPU(s):          42-48,154-160

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node7 CPU(s):          49-55,161-167
NUMA node8 CPU(s):          56-62,168-174
NUMA node9 CPU(s):          63-69,175-181
NUMA node10 CPU(s):         70-76,182-188
NUMA node11 CPU(s):         77-83,189-195
NUMA node12 CPU(s):         84-90,196-202
NUMA node13 CPU(s):         91-97,203-209
NUMA node14 CPU(s):         98-104,210-216
NUMA node15 CPU(s):         105-111,217-223
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	75M	300M	15	Unified	3	81920	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-6,112-118
node 0 size: 64077 MB
node 0 free: 54256 MB
node 1 cpus: 7-13,119-125
node 1 size: 64508 MB
node 1 free: 58587 MB
node 2 cpus: 14-20,126-132
node 2 size: 64508 MB
node 2 free: 58600 MB
node 3 cpus: 21-27,133-139
node 3 size: 64508 MB
node 3 free: 58601 MB
node 4 cpus: 28-34,140-146
node 4 size: 64508 MB
node 4 free: 58573 MB
node 5 cpus: 35-41,147-153
node 5 size: 64508 MB
node 5 free: 58608 MB
node 6 cpus: 42-48,154-160
node 6 size: 64508 MB
node 6 free: 58605 MB
node 7 cpus: 49-55,161-167
node 7 size: 64508 MB
node 7 free: 58606 MB
node 8 cpus: 56-62,168-174
node 8 size: 64508 MB
node 8 free: 58612 MB
node 9 cpus: 63-69,175-181
node 9 size: 64508 MB
node 9 free: 58611 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358
Test Sponsor: Inspur Electronic Information Industry Co., Ltd.
Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 10 cpus: 70-76,182-188
node 10 size: 64508 MB
node 10 free: 58649 MB
node 11 cpus: 77-83,189-195
node 11 size: 64508 MB
node 11 free: 58642 MB
node 12 cpus: 84-90,196-202
node 12 size: 64508 MB
node 12 free: 58643 MB
node 13 cpus: 91-97,203-209
node 13 size: 64472 MB
node 13 free: 58588 MB
node 14 cpus: 98-104,210-216
node 14 size: 64508 MB
node 14 free: 58650 MB
node 15 cpus: 105-111,217-223
node 15 size: 64489 MB
node 15 free: 58631 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
1:  12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
2:  12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
3:  12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
4:  21 21 21 21 10 12 12 12 21 21 21 21 21 21 21 21
5:  21 21 21 21 12 10 12 12 21 21 21 21 21 21 21 21
6:  21 21 21 21 12 12 10 12 21 21 21 21 21 21 21 21
7:  21 21 21 21 12 12 12 10 21 21 21 21 21 21 21 21
8:  21 21 21 21 21 21 21 21 10 12 12 12 21 21 21 21
9:  21 21 21 21 21 21 21 21 12 10 12 12 21 21 21 21
10: 21 21 21 21 21 21 21 21 12 12 10 12 21 21 21 21
11: 21 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21
12: 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12 12
13: 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12 12
14: 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12 12
15: 21 21 21 21 21 21 21 21 21 21 21 12 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      1056414792 kB

```

```

-----
10. who -r
run-level 3 Aug 24 12:10

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user      degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

```

```

-----
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor microcode nis-domainname

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

enabled-runtime  rhtsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator upower
disabled         systemd-remount-fs
                 blk-availability canberra-system-bootup canberra-system-shutdown
                 canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell kvm_stat
                 man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@
                 sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect        sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,msdos1)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.50 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

```
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

20. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 155G 664G 19% /home
```

21. /sys/devices/virtual/dmi/id

```
Vendor: IEI
Product: NF8480-M7-A0-R0-00
Product Family: Not specified
Serial: 380251A12
```

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 32x Micron MTC20F2085S1RC48BA1 32 GB 2 rank 4800
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 03.00.00
BIOS Date: 12/16/2022
```

Compiler Version Notes

```
====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220

SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220
SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF8480M7 (Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 1220

SPECrate®2017_fp_peak = 1250

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-25 11:33:19-0400.

Report generated on 2023-10-13 18:30:19 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-26.