



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro


UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Sep-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

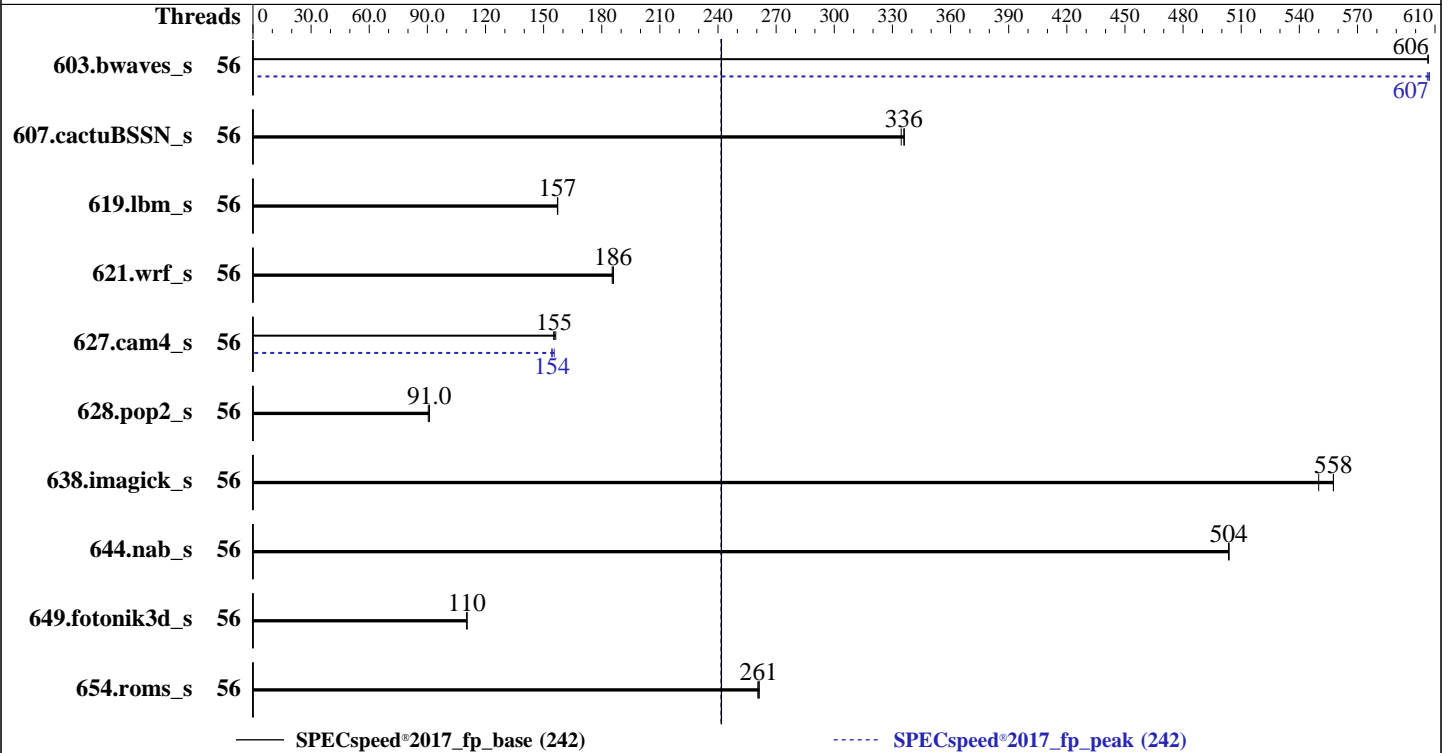

### Hardware

CPU Name: Intel Xeon Platinum 8480+  
Max MHz: 3800  
Nominal: 2000  
Enabled: 56 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 105 MB I+D on chip per chip  
Other: None  
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R)  
Storage: 1 x 240 GB SATA III SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
Kernel 5.14.21-150400.22-default  
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: Version 1.1 released Jan-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECSpeed®2017\_fp\_base = 242

SPECSpeed®2017\_fp\_peak = 242

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Sep-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	97.3	606	97.3	606	<b>97.3</b>	<b>606</b>	56	97.2	607	97.4	606	<b>97.2</b>	<b>607</b>
607.cactuBSSN_s	56	49.8	335	<b>49.6</b>	<b>336</b>	49.6	336	56	49.8	335	<b>49.6</b>	<b>336</b>	49.6	336
619.lbm_s	56	<b>33.3</b>	<b>157</b>	33.3	157	33.3	157	56	<b>33.3</b>	<b>157</b>	33.3	157	33.3	157
621.wrf_s	56	<b>71.2</b>	<b>186</b>	71.3	185	71.1	186	56	<b>71.2</b>	<b>186</b>	71.3	185	71.1	186
627.cam4_s	56	56.7	156	<b>57.0</b>	<b>155</b>	57.1	155	56	<b>57.4</b>	<b>154</b>	57.5	154	57.0	155
628.pop2_s	56	130	91.1	<b>130</b>	<b>91.0</b>	131	90.5	56	130	91.1	<b>130</b>	<b>91.0</b>	131	90.5
638.imagick_s	56	<b>25.9</b>	<b>558</b>	25.9	558	26.2	550	56	<b>25.9</b>	<b>558</b>	25.9	558	26.2	550
644.nab_s	56	34.7	504	<b>34.7</b>	<b>504</b>	34.7	504	56	34.7	504	<b>34.7</b>	<b>504</b>	34.7	504
649.fotonik3d_s	56	82.6	110	82.6	110	<b>82.6</b>	<b>110</b>	56	82.6	110	82.6	110	<b>82.6</b>	<b>110</b>
654.roms_s	56	60.3	261	60.4	261	<b>60.3</b>	<b>261</b>	56	60.3	261	60.4	261	<b>60.3</b>	<b>261</b>

SPECSpeed®2017\_fp\_base = 242

SPECSpeed®2017\_fp\_peak = 242

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes

### BIOS Settings:

Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance  
DCU Streamer Prefetcher = Disable  
Hyper-Threading [ALL] = Disable  
LLC Dead Line Alloc = Disable  
KTI Prefetch = Enable  
Stale AtoS = Disable  
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on SYS-521C-NR-8480 Fri Sep 15 22:22:04 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux SYS-521C-NR-8480 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022
(49db222) x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
 22:22:04 up 3:25, 2 users, load average: 6.44, 5.89, 3.48
USER   TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root   tty1     -             18:58       3:22m     0.88s   0.00s  -bash
root   tty2     -             18:59       3:22m     0.02s   0.02s  -bash
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 1029610
max locked memory     (kbytes, -l) 64
max memory size       (kbytes, -m) unlimited
open files            (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues  (bytes, -q) 819200
real-time priority    (-r) 0
stack size            (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes    (-u) 1029610
virtual memory        (kbytes, -v) unlimited
file locks            (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=56 --tune base,peak -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=56 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $$SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
  --from_runcpu 2
specperl $$SPEC/bin/sysinfo
$$SPEC = /home/cpu2017

```

```

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8480+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaps
cpu cores      : 56
siblings       : 56
1 physical ids (chips)
56 processors (hardware threads)
physical id 0: core ids 0-55
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.2:

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       56
On-line CPU(s) list:         0-55
Vendor ID:                   GenuineIntel
Model name:                   Intel(R) Xeon(R) Platinum 8480+
CPU family:                   6
Model:                        143
Thread(s) per core:          1
Core(s) per socket:          56
Socket(s):                    1
Stepping:                     8
Frequency boost:              enabled
CPU max MHz:                  2001.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4000.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                cflflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   2.6 MiB (56 instances)
L1i cache:                   1.8 MiB (56 instances)
L2 cache:                    112 MiB (56 instances)
L3 cache:                    105 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):           0-55
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL   SETS PHY-LINE COHERENCY-SIZE
L1d   48K      2.6M   12 Data          1       64      1           64
L1i   32K      1.8M    8 Instruction    1       64      1           64
L2    2M       112M   16 Unified       2      2048    1           64
L3   105M     105M   15 Unified       3  114688    1           64

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-55
node 0 size: 257429 MB
node 0 free: 249513 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 263607708 kB
```

10. who -r

```
run-level 3 Sep 15 18:56
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels
rollback rsyslog smartd sshd wpa_supplicant
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap
nm-cloud-setup rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny wpa_supplicant@
indirect wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=e03d955a-b534-4e13-b78b-6834d53b79c0
splash=silent
quiet
security=apparmor
mitigations=auto
```

14. cpupower frequency-info

```
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 2.00 GHz.
The governor "ondemand" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   221G  102G  120G  46% /
-----
20. /sys/devices/virtual/dmi/id
Vendor:          FruPM33
Product:         FruPPM33
Product Family: Family
Serial:          FruPS33
-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
8x Micron Technology MTC20F2085S1RC48BA1 32 GB 2 rank 4800

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.1  
BIOS Date: 01/19/2023  
BIOS Revision: 5.29

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-521C-NR  
(X13SEDW-F, Intel Xeon Platinum 8480+)

SPECspeed®2017\_fp\_base = 242

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Sep-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64\\_revB.html](http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.html)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64\\_revB.xml](http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.xml)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-15 10:22:03-0400.  
Report generated on 2023-10-11 12:35:38 by CPU2017 PDF formatter v6716.  
Originally published on 2023-10-10.