



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

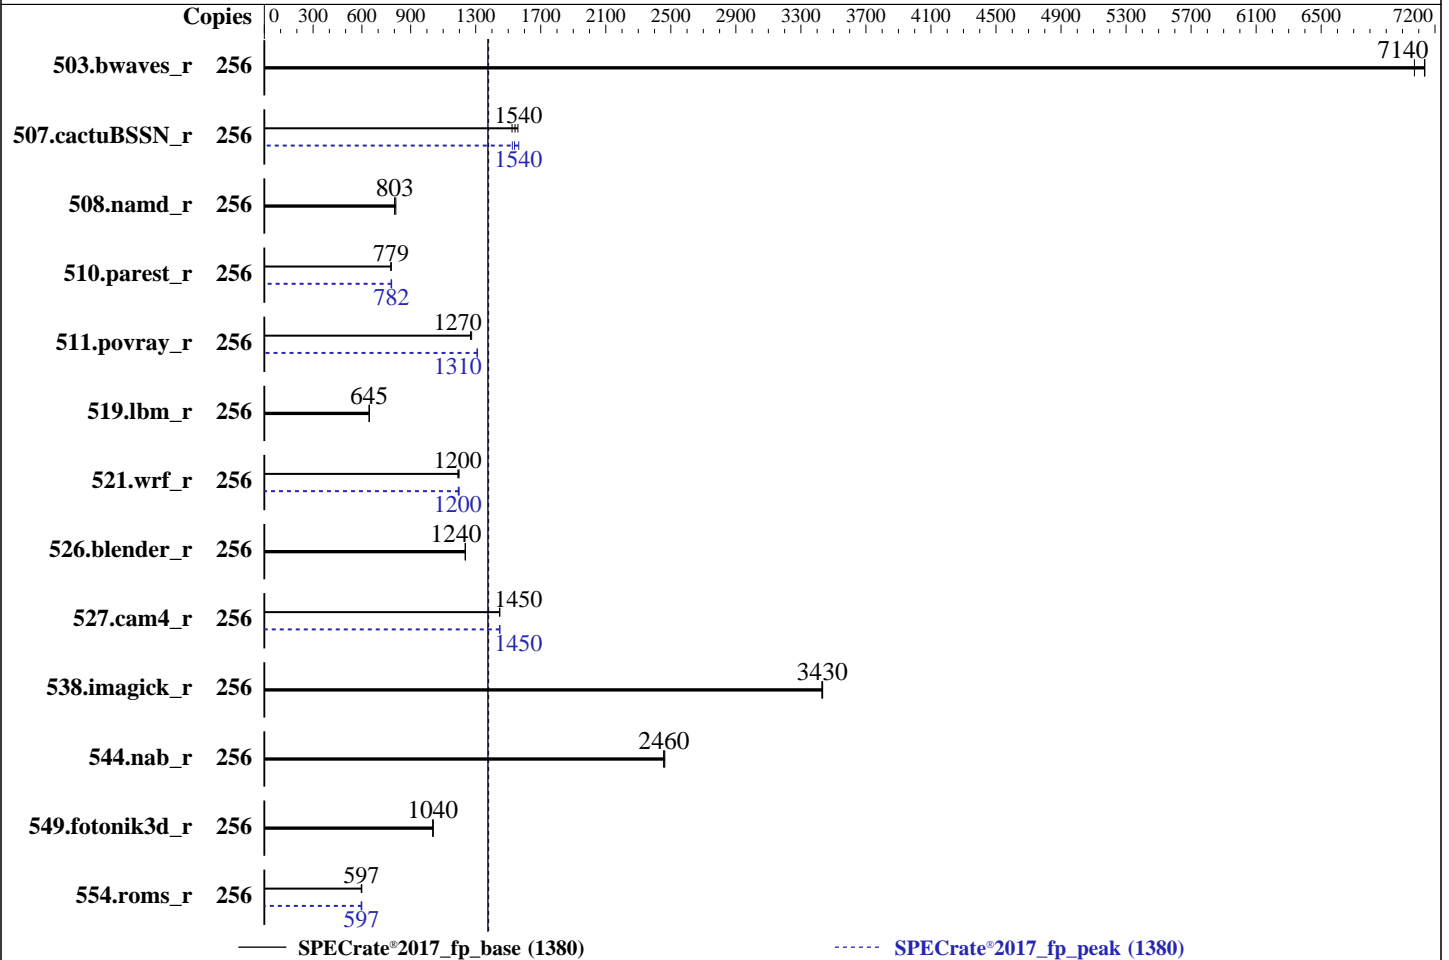

### Hardware

CPU Name: Intel Xeon Platinum 8454H  
 Max MHz: 3400  
 Nominal: 2100  
 Enabled: 128 cores, 4 chips, 2 threads/core  
 Orderable: 1,2,4 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 82.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 01.02.00.05 Released Jul-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Oct-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	<b>360</b>	<b>7140</b>	360	7140	363	7070	256	<b>360</b>	<b>7140</b>	360	7140	363	7070
507.cactuBSSN_r	256	208	1560	213	1520	<b>210</b>	<b>1540</b>	256	<b>211</b>	<b>1540</b>	212	1530	207	1560
508.namd_r	256	<b>303</b>	<b>803</b>	304	801	301	809	256	<b>303</b>	<b>803</b>	304	801	301	809
510.parest_r	256	860	779	<b>859</b>	<b>779</b>	858	780	256	855	783	<b>856</b>	<b>782</b>	859	780
511.povray_r	256	<b>471</b>	<b>1270</b>	469	1280	471	1270	256	457	1310	<b>456</b>	<b>1310</b>	456	1310
519.lbm_r	256	418	645	<b>418</b>	<b>645</b>	418	645	256	418	645	<b>418</b>	<b>645</b>	418	645
521.wrf_r	256	482	1190	<b>479</b>	<b>1200</b>	479	1200	256	479	1200	481	1190	<b>479</b>	<b>1200</b>
526.blender_r	256	<b>315</b>	<b>1240</b>	315	1240	315	1240	256	<b>315</b>	<b>1240</b>	315	1240	315	1240
527.cam4_r	256	<b>310</b>	<b>1450</b>	309	1450	310	1450	256	309	1450	<b>309</b>	<b>1450</b>	309	1450
538.imagick_r	256	<b>186</b>	<b>3430</b>	185	3430	186	3430	256	<b>186</b>	<b>3430</b>	185	3430	186	3430
544.nab_r	256	175	2460	175	2460	<b>175</b>	<b>2460</b>	256	175	2460	175	2460	<b>175</b>	<b>2460</b>
549.fotonik3d_r	256	960	1040	963	1040	<b>962</b>	<b>1040</b>	256	960	1040	963	1040	<b>962</b>	<b>1040</b>
554.roms_r	256	682	597	<b>681</b>	<b>597</b>	679	600	256	683	596	678	600	<b>681</b>	<b>597</b>

SPECrate®2017\_fp\_base = **1380**

SPECrate®2017\_fp\_peak = **1380**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/je5.0.1-64"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Sat Oct 7 17:50:14 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

2. w  
17:50:14 up 6:33, 0 users, load average: 36.18, 170.89, 221.70  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4125098
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4125098
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/bin/sh ./run_rate.sh
runcpu --define default-platform-flags --copies 256 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg
--define smt-on --define cores=128 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 256 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.022/temlogs/preenv.fprate.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/cpu2017
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8454H
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b0001b0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 32
siblings        : 64
4 physical ids (chips)
256 processors (hardware threads)
physical id 0:  core ids 0-31
physical id 1:  core ids 0-31
physical id 2:  core ids 0-31
physical id 3:  core ids 0-31
physical id 0:  apicids 0-63
physical id 1:  apicids 128-191
physical id 2:  apicids 256-319
physical id 3:  apicids 384-447
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8454H
BIOS Model name:      Intel(R) Xeon(R) Platinum 8454H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             4
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                      invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                      clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                      avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                      enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                      amx_tile flush_lld arch_capabilities

```

```

Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              330 MiB (4 instances)
NUMA node(s):         16
NUMA node0 CPU(s):    0-7,128-135
NUMA node1 CPU(s):    8-15,136-143
NUMA node2 CPU(s):    16-23,144-151
NUMA node3 CPU(s):    24-31,152-159
NUMA node4 CPU(s):    32-39,160-167
NUMA node5 CPU(s):    40-47,168-175
NUMA node6 CPU(s):    48-55,176-183
NUMA node7 CPU(s):    56-63,184-191
NUMA node8 CPU(s):    64-71,192-199
NUMA node9 CPU(s):    72-79,200-207
NUMA node10 CPU(s):   80-87,208-215
NUMA node11 CPU(s):   88-95,216-223
NUMA node12 CPU(s):   96-103,224-231

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

NUMA node13 CPU(s):          104-111,232-239
NUMA node14 CPU(s):          112-119,240-247
NUMA node15 CPU(s):          120-127,248-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:    Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	82.5M	330M	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-7,128-135
node 0 size: 63740 MB
node 0 free: 62673 MB
node 1 cpus: 8-15,136-143
node 1 size: 64508 MB
node 1 free: 63641 MB
node 2 cpus: 16-23,144-151
node 2 size: 64508 MB
node 2 free: 63180 MB
node 3 cpus: 24-31,152-159
node 3 size: 64508 MB
node 3 free: 63633 MB
node 4 cpus: 32-39,160-167
node 4 size: 64508 MB
node 4 free: 63614 MB
node 5 cpus: 40-47,168-175
node 5 size: 64508 MB
node 5 free: 63637 MB
node 6 cpus: 48-55,176-183
node 6 size: 64508 MB
node 6 free: 63626 MB
node 7 cpus: 56-63,184-191
node 7 size: 64508 MB
node 7 free: 63634 MB
node 8 cpus: 64-71,192-199
node 8 size: 64508 MB
node 8 free: 63630 MB
node 9 cpus: 72-79,200-207
node 9 size: 64508 MB
node 9 free: 63628 MB
node 10 cpus: 80-87,208-215
node 10 size: 64508 MB
node 10 free: 63627 MB
node 11 cpus: 88-95,216-223
node 11 size: 64472 MB
node 11 free: 63589 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

node 12 cpus: 96-103,224-231
node 12 size: 64508 MB
node 12 free: 63632 MB
node 13 cpus: 104-111,232-239
node 13 size: 64508 MB
node 13 free: 63633 MB
node 14 cpus: 112-119,240-247
node 14 size: 64508 MB
node 14 free: 63626 MB
node 15 cpus: 120-127,248-255
node 15 size: 64488 MB
node 15 free: 63627 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0: 10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
1: 12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
2: 12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
3: 12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
4: 21 21 21 21 10 12 12 12 21 21 21 21 21 21 21 21
5: 21 21 21 21 12 10 12 12 21 21 21 21 21 21 21 21
6: 21 21 21 21 12 12 12 10 12 21 21 21 21 21 21 21
7: 21 21 21 21 12 12 12 10 21 21 21 21 21 21 21 21
8: 21 21 21 21 21 21 21 10 12 12 12 21 21 21 21 21
9: 21 21 21 21 21 21 21 12 10 12 12 21 21 21 21 21
10: 21 21 21 21 21 21 21 12 12 10 12 21 21 21 21 21
11: 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21 21
12: 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12 12
13: 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12 12
14: 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12 12
15: 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10 12

```

```

-----
9. /proc/meminfo
   MemTotal:      1056063264 kB

```

```

-----
10. who -r
    run-level 3 Oct 7 11:17

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.e19_0)
    Default Target   Status
    multi-user       degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
    UNIT          LOAD   ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

```

-----
13. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                 dbus-broker firewalld getty@ irgbalance kdump mdmonitor microcode nis-domainname rhsmcertd
                 rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-network-generator tuned udisks2
enabled-runtime  systemd-remount-fs
disabled         chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update
                 nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@
                 systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=058bdfdf1-c62b-4fad-8d41-5c40aa179007
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b47f1685-a5fa-4d39-b2d7-e3f6e95ad499
nohz_full=1-72

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

-----  
20. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)  
-----

-----  
21. Disk information  
SPEC is set to: /home/Uniautos/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda5 xfs 820G 52G 768G 7% /home  
-----

-----  
22. /sys/devices/virtual/dmi/id  
Vendor: XFUSION  
Product: 5885H V7  
Product Family: EagleStream  
-----

-----  
23. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800  
-----

-----  
24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: XFUSION  
BIOS Version: 01.02.00.05  
BIOS Date: 07/13/2023  
-----

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Oct-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1380

FusionServer 5885H V7 (Intel Xeon Platinum 8454H)

SPECrate®2017\_fp\_peak = 1380

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Oct-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-07 05:50:13-0400.

Report generated on 2023-11-07 18:41:05 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-07.