



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

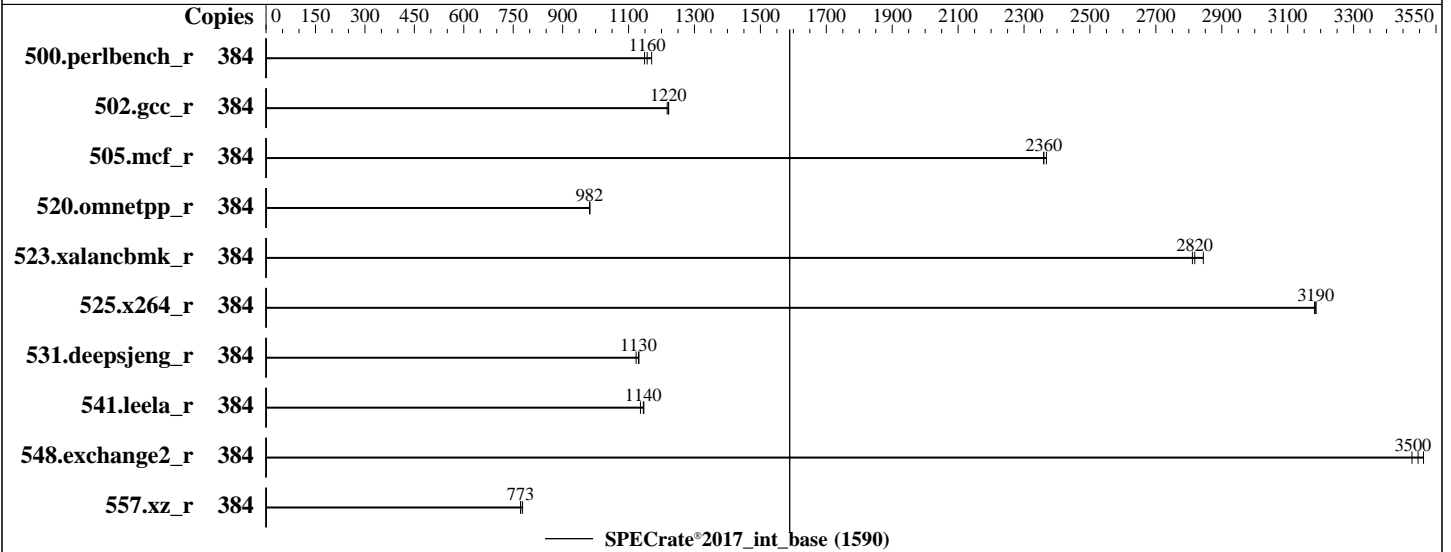

Hardware

CPU Name: Intel Xeon Platinum 8468H
 Max MHz: 3800
 Nominal: 2100
 Enabled: 192 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.1 (Plow) (x86_64)
 Kernel 5.14.0-162.6.1.el9_1.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version RSE109C 3.10 released Sep-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	529	1160	522	1170	532	1150							
502.gcc_r	384	447	1220	445	1220	445	1220							
505.mcf_r	384	263	2360	263	2360	262	2370							
520.omnetpp_r	384	513	983	513	981	513	982							
523.xalancbmk_r	384	144	2820	143	2840	144	2810							
525.x264_r	384	211	3190	211	3190	211	3180							
531.deepsjeng_r	384	389	1130	392	1120	389	1130							
541.leela_r	384	560	1140	555	1140	555	1150							
548.exchange2_r	384	286	3510	288	3500	289	3480							
557.xz_r	384	533	778	537	772	537	773							

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2023.0-2/lib/intel64:/home/cpu2017-1.1.9-ic2023.0-2/lib/ia32:/home/cpu2017-1.1.9-ic2023.0-2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 1590

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC4

UPI Link Disable set to Minimum Number of Links Enabled

LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0-2/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Tue Oct 10 00:30:45 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-12.e19_1)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 1590

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

1. `uname -a`
Linux localhost.localdomain 5.14.0-162.6.1.el9_1.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Sep 30 07:36:03 EDT 2022
x86_64 x86_64 x86_64 GNU/Linux

2. `w`
00:30:45 up 8:05, 2 users, load average: 81.17, 279.99, 343.34
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 16:26 6:50m 0.96s 0.02s /bin/bash ./run_SR850V3.sh
root pts/0 17:36 6:51m 0.01s 0.01s -bash

3. Username
From environment variable \$USER: root

4. `ulimit -a`
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 8255404
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8255404
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./run_SR850V3.sh
/bin/bash ./run_SR850V3.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.155/templogs/preenv.intrate.155.0.log --lognum 155.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017-1.1.9-ic2023.0-2

6. `/proc/cpuinfo`
model name : Intel(R) Xeon(R) Platinum 8468H
vendor_id : GenuineIntel
cpu family : 6
model : 143

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 1590

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
stepping      : 8
microcode     : 0x2b0004d0
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 48
siblings      : 96
4 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 2: core ids 0-47
physical id 3: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
physical id 2: apicids 256-351
physical id 3: apicids 384-479
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8468H
BIOS Model name:      Intel(R) Xeon(R) Platinum 8468H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   48
Socket(s):             4
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                    tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2
                    smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                    arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                    vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                    bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                    tsxldtrk pconfig arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                    arch_capabilities
Virtualization:        VT-x
L1d cache:             9 MiB (192 instances)
L1i cache:             6 MiB (192 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

L2 cache:                384 MiB (192 instances)
L3 cache:                420 MiB (4 instances)
NUMA node(s):           16
NUMA node0 CPU(s):      0-11,192-203
NUMA node1 CPU(s):      12-23,204-215
NUMA node2 CPU(s):      24-35,216-227
NUMA node3 CPU(s):      36-47,228-239
NUMA node4 CPU(s):      48-59,240-251
NUMA node5 CPU(s):      60-71,252-263
NUMA node6 CPU(s):      72-83,264-275
NUMA node7 CPU(s):      84-95,276-287
NUMA node8 CPU(s):      96-107,288-299
NUMA node9 CPU(s):      108-119,300-311
NUMA node10 CPU(s):     120-131,312-323
NUMA node11 CPU(s):     132-143,324-335
NUMA node12 CPU(s):     144-155,336-347
NUMA node13 CPU(s):     156-167,348-359
NUMA node14 CPU(s):     168-179,360-371
NUMA node15 CPU(s):     180-191,372-383
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW
sequence
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-11,192-203
node 0 size: 128680 MB
node 0 free: 127311 MB
node 1 cpus: 12-23,204-215
node 1 size: 129018 MB
node 1 free: 127964 MB
node 2 cpus: 24-35,216-227
node 2 size: 129018 MB
node 2 free: 128001 MB
node 3 cpus: 36-47,228-239
node 3 size: 129018 MB
node 3 free: 127967 MB
node 4 cpus: 48-59,240-251
node 4 size: 129018 MB
node 4 free: 127985 MB
node 5 cpus: 60-71,252-263
node 5 size: 129018 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

node 5 free: 127985 MB
node 6 cpus: 72-83,264-275
node 6 size: 129018 MB
node 6 free: 127990 MB
node 7 cpus: 84-95,276-287
node 7 size: 129018 MB
node 7 free: 127995 MB
node 8 cpus: 96-107,288-299
node 8 size: 129018 MB
node 8 free: 127987 MB
node 9 cpus: 108-119,300-311
node 9 size: 129018 MB
node 9 free: 127994 MB
node 10 cpus: 120-131,312-323
node 10 size: 129018 MB
node 10 free: 128010 MB
node 11 cpus: 132-143,324-335
node 11 size: 129018 MB
node 11 free: 127999 MB
node 12 cpus: 144-155,336-347
node 12 size: 129018 MB
node 12 free: 127995 MB
node 13 cpus: 156-167,348-359
node 13 size: 129018 MB
node 13 free: 127991 MB
node 14 cpus: 168-179,360-371
node 14 size: 129018 MB
node 14 free: 127983 MB
node 15 cpus: 180-191,372-383
node 15 size: 128949 MB
node 15 free: 127885 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 12 12 21 21 21 21 31 31 31 31 21 21 21 21
1:  12 10 12 12 21 21 21 21 31 31 31 31 21 21 21 21
2:  12 12 10 12 21 21 21 21 31 31 31 31 21 21 21 21
3:  12 12 12 10 21 21 21 21 31 31 31 31 21 21 21 21
4:  21 21 21 21 10 12 12 12 21 21 21 21 31 31 31 31
5:  21 21 21 21 12 10 12 12 21 21 21 21 31 31 31 31
6:  21 21 21 21 12 12 10 12 21 21 21 21 31 31 31 31
7:  21 21 21 21 12 12 12 10 21 21 21 21 31 31 31 31
8:  31 31 31 31 21 21 21 21 10 12 12 12 21 21 21 21
9:  31 31 31 31 21 21 21 21 12 10 12 12 21 21 21 21
10: 31 31 31 31 21 21 21 21 12 12 10 12 21 21 21 21
11: 31 31 31 31 21 21 21 21 12 12 12 10 21 21 21 21
12: 21 21 21 21 31 31 31 31 21 21 21 21 10 12 12 12
13: 21 21 21 21 31 31 31 31 21 21 21 21 12 10 12 12
14: 21 21 21 21 31 31 31 31 21 21 21 21 12 12 10 12
15: 21 21 21 21 31 31 31 31 21 21 21 21 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      2113423960 kB

```

```

-----
10. who -r
    run-level 3 Oct 9 16:26

```

```

-----
11. Systemd service manager version: systemd 250 (250-12.el9_1)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* dnf-makecache.service	loaded	failed	failed	dnf makecache
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online
* systemd-sysctl.service	loaded	failed	failed	Apply Kernel Variables

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker getty@ irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell firewallld kvm_stat man-db-restart-cache-update nftables pesign rdisc rhsm rhsm-facts rpmdm-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
generated	ntp_sync
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd3,gpt3)/boot/vmlinuz-5.14.0-162.6.1.el9_1.x86_64
root=UUID=43a7f1b1-66b0-456a-8c3f-451305a00281
ro
resume=UUID=58de1c40-542f-453b-bb6a-6bbd3510660a
```

15. cpupower frequency-info

```
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

16. tuned-adm active

Current active profile: throughput-performance

17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.nr_overcommit_hugepages      0
vm.swappiness                    10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release           Red Hat Enterprise Linux 9.1 (Plow)
redhat-release       Red Hat Enterprise Linux release 9.1 (Plow)
system-release       Red Hat Enterprise Linux release 9.1 (Plow)

```

```

-----
21. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0-2
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs  819G  28G  791G   4% /home

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR850 V3
Product Family: ThinkSystem
Serial:          None

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  7x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
  3x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
  3x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
  6x Samsung M321R8GA0BB0-CQKVE 64 GB 2 rank 4800
 13x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

```

-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Vendor: Lenovo
BIOS Version: RSE109C-3.10
BIOS Date: 09/26/2023
BIOS Revision: 3.10
Firmware Revision: 3.10

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1590

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-09 12:30:45-0400.

Report generated on 2024-01-29 18:13:57 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-07.