



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2023

Hardware Availability: Sep-2023

Software Availability: Sep-2023

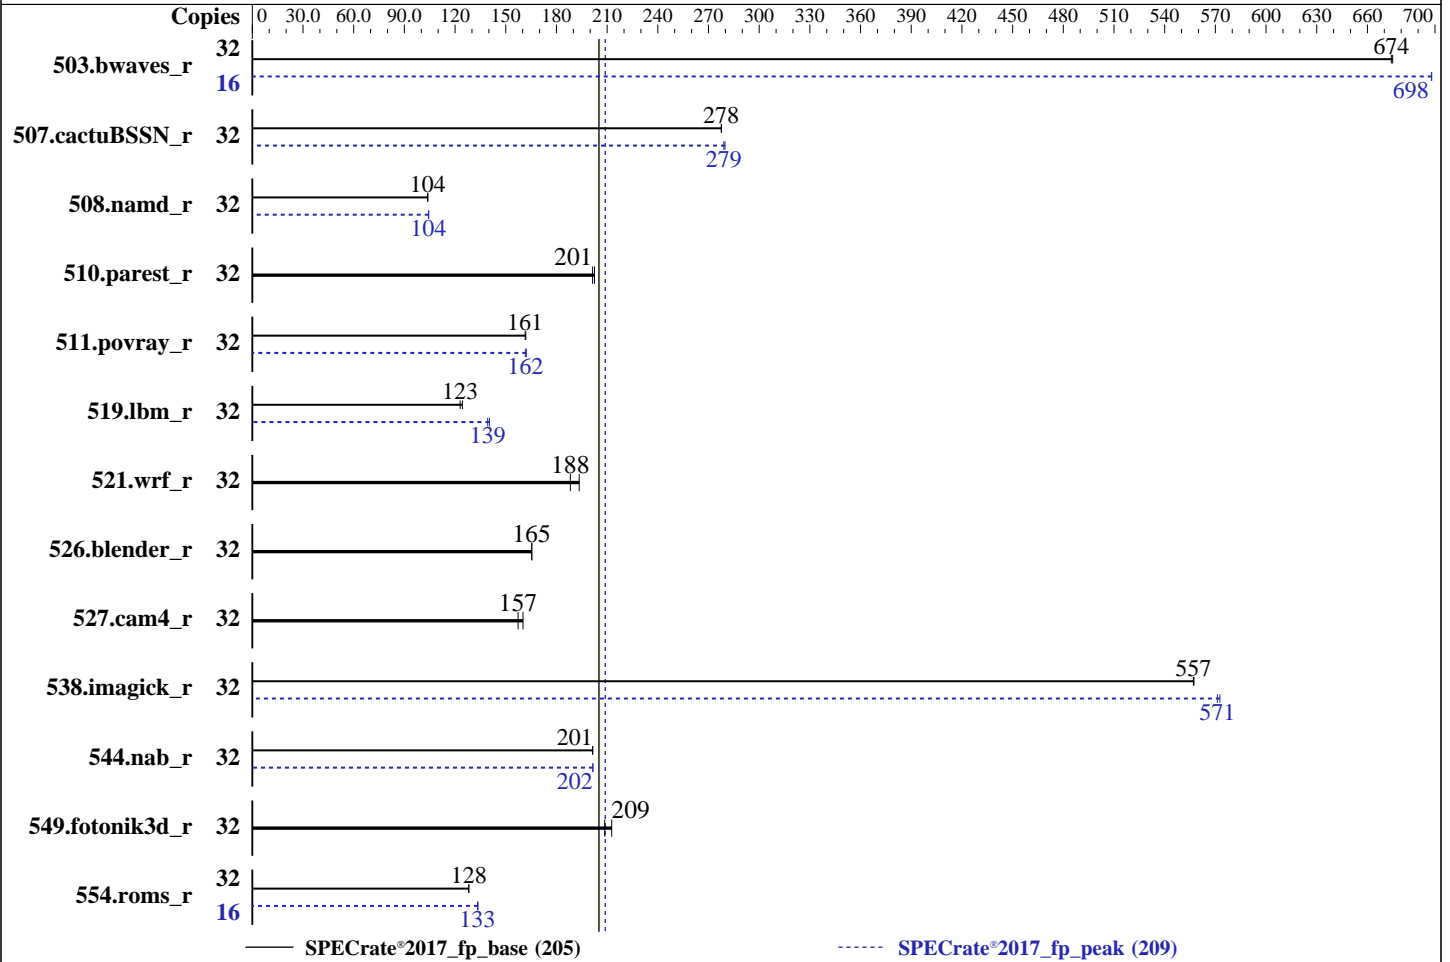

Hardware

CPU Name: AMD EPYC 7203
 Max MHz: 3400
 Nominal: 2800
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 16 MB shared / 2 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 240 GB SATA III SSD
 Other: None

Software

OS: Ubuntu 22.04.3 LTS
 Kernel 5.15.0-86-generic
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: No
 Firmware: Version 2.6 released Apr-2023
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	475	675	476	674			16	230	698	230	698		
507.cactuBSSN_r	32	146	278	146	278			32	145	279	145	280		
508.namd_r	32	293	104	293	104			32	291	104	291	104		
510.parest_r	32	413	203	416	201			32	413	203	416	201		
511.povray_r	32	463	161	462	162			32	462	162	461	162		
519.lbm_r	32	274	123	271	124			32	240	140	242	139		
521.wrf_r	32	381	188	371	193			32	381	188	371	193		
526.blender_r	32	295	165	295	165			32	295	165	295	165		
527.cam4_r	32	349	160	356	157			32	349	160	356	157		
538.imagick_r	32	143	557	143	557			32	139	573	139	571		
544.nab_r	32	267	201	267	202			32	267	202	267	202		
549.fotonik3d_r	32	586	213	598	209			32	586	213	598	209		
554.roms_r	32	397	128	397	128			16	191	133	190	134		

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 150
Package Power Limit Control = Manual
Package Power Limit = 150
APBDIS = 1
NUMA Nodes Per Socket = NPS4

sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on as-2024s-tr-7203 Mon Oct 23 15:55:19 2023

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

```

8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux as-2024s-tr-7203 5.15.0-86-generic #96-Ubuntu SMP Wed Sep 20 08:23:49 UTC 2023 x86_64 x86_64 x86_64
GNU/Linux

```

```

-----
2. w
 15:55:19 up 4:00, 2 users, load average: 20.63, 29.13, 30.80
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
lab       tty1    -                11:55    4:00m  0.67s  0.01s -bash
lab       pts/0   -                11:55    3:59m  1.57s  0.63s sudo su -

```

```

-----
3. Username
From environment variable $USER:  root
From the command 'logname':      lab

```

```

-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            4127219
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0

```

```

-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_rate_aocc320_milanx_A1.py
/bin/bash ./amd_rate_aocc320_milanx_A1.sh

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

```
runcpu --config amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 fprate
runcpu --configfile amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 7203 8-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 1
stepping       : 1
microcode      : 0xa0011d1
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 2560 4K pages
cpu cores      : 8
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 16-31
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 7203 8-Core Processor
CPU family:            25
Model:                 1
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3431.6399
CPU min MHz:           1500.0000
BogoMIPS:              5600.18
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe
popcnt aes xsave avx fl6c rdrand lahf_lm cmp_legacy svm extapic
cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

```
cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid
overflow_recov succor smca fsrm
```

```
Virtualization: AMD-V
L1d cache: 512 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 8 MiB (16 instances)
L3 cache: 128 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0,1,16,17
NUMA node1 CPU(s): 2,3,18,19
NUMA node2 CPU(s): 4,5,20,21
NUMA node3 CPU(s): 6,7,22,23
NUMA node4 CPU(s): 8,9,24,25
NUMA node5 CPU(s): 10,11,26,27
NUMA node6 CPU(s): 12,13,28,29
NUMA node7 CPU(s): 14,15,30,31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 32K 512K 8 Data 1 64 1 64
L1i 32K 512K 8 Instruction 1 64 1 64
L2 512K 8M 8 Unified 2 1024 1 64
L3 16M 128M 16 Unified 3 16384 1 64
```

```
-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-1,16-17
node 0 size: 128822 MB
node 0 free: 128305 MB
node 1 cpus: 2-3,18-19
node 1 size: 129022 MB
node 1 free: 128620 MB
node 2 cpus: 4-5,20-21
node 2 size: 128974 MB
node 2 free: 128545 MB
node 3 cpus: 6-7,22-23
node 3 size: 129010 MB
node 3 free: 128536 MB
node 4 cpus: 8-9,24-25
node 4 size: 129022 MB
node 4 free: 128622 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

```

node 5 cpus: 10-11,26-27
node 5 size: 129022 MB
node 5 free: 128638 MB
node 6 cpus: 12-13,28-29
node 6 size: 129022 MB
node 6 free: 128651 MB
node 7 cpus: 14-15,30-31
node 7 size: 129021 MB
node 7 free: 128592 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1056684136 kB

```

```

-----
10. who -r
    run-level 5 Oct 23 11:55

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
    Default Target   Status
    graphical        running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated apport
indirect uuid
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-86-generic
root=UUID=d06a341c-7b0d-4f57-aec5-11bd41alc57a
ro

```

```

-----
14. cpupower frequency-info

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.80 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2800MHz

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 218G 16G 191G 8% /

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: AS-2024S-TR
Serial: WMF21BS602916

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends Inc.
BIOS Version: 2.6
BIOS Date: 04/13/2023
BIOS Revision: 5.22

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Compiler Version Notes (Continued)

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

```
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

C++ benchmarks:

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -Hz,1,0x1 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loop-fusion
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -z muldefs -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flt0 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flt0 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flt0
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fininline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

510.parest_r: basepeak = yes

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flt0
-Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2023

Hardware Availability: Sep-2023

Software Availability: Sep-2023

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang
```

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Mrecursive -lamdlibm -ljemalloc
-lflang
```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revH.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7203)

SPECrate®2017_fp_base = 205

SPECrate®2017_fp_peak = 209

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2023

Hardware Availability: Sep-2023

Software Availability: Sep-2023

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-23 11:55:18-0400.

Report generated on 2023-11-07 18:45:07 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-07.