



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

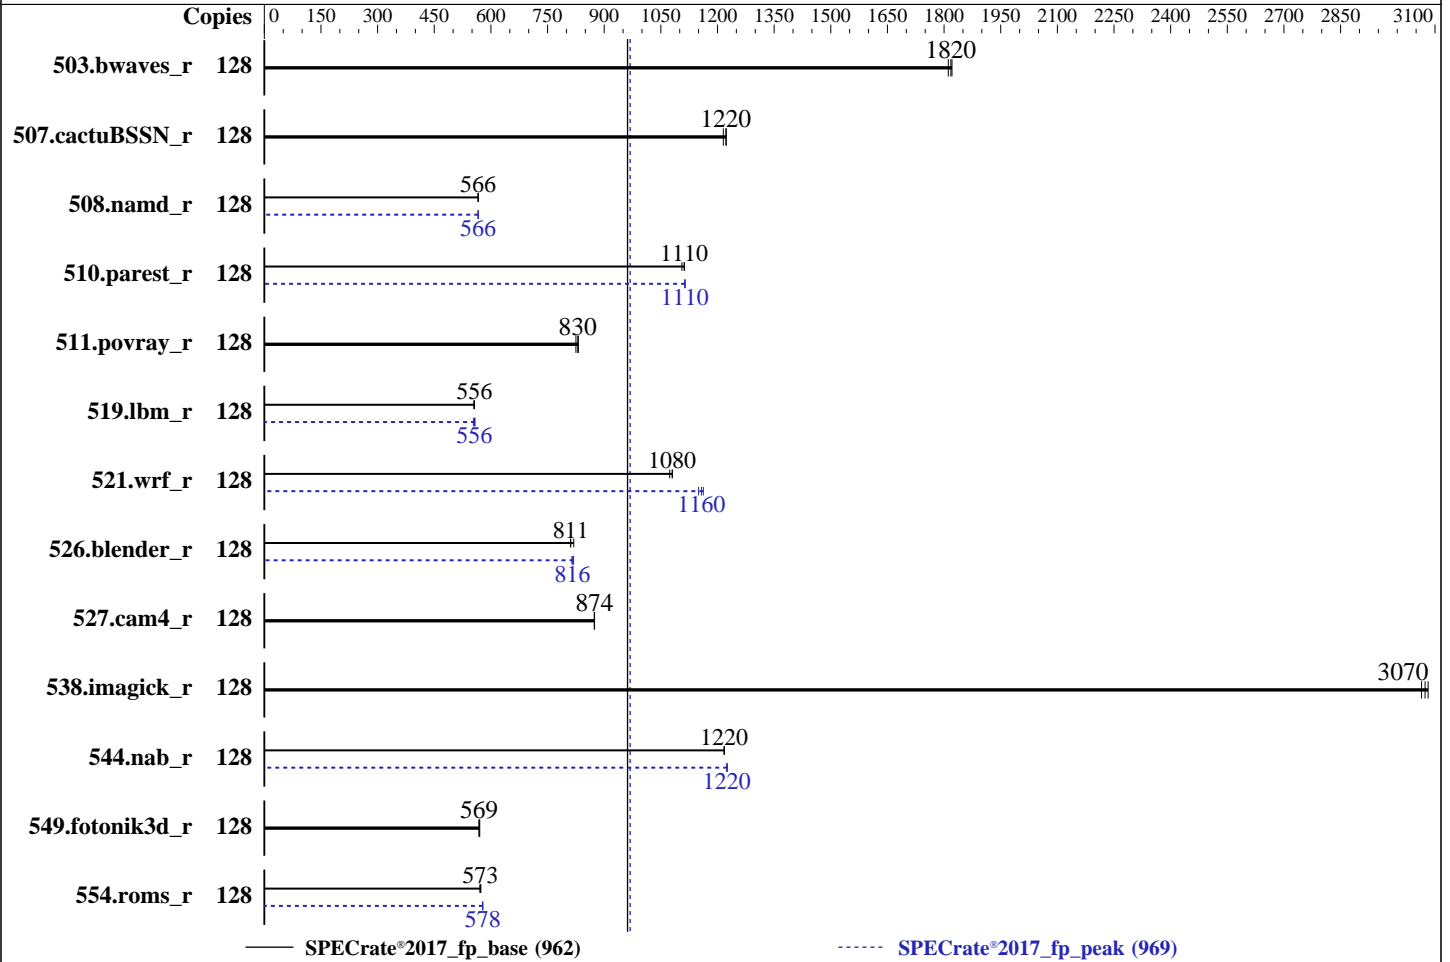

### Hardware

CPU Name: AMD EPYC 9384X  
 Max MHz: 3900  
 Nominal: 3100  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 768 MB I+D on chip per chip,  
 96 MB shared / 4 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 4.0 TB PCIe NVMe SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1002 released May-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	709	1810	705	1820	<b>706</b>	<b>1820</b>	128	709	1810	705	1820	<b>706</b>	<b>1820</b>
507.cactuBSSN_r	128	133	1220	<b>133</b>	<b>1220</b>	132	1220	128	133	1220	<b>133</b>	<b>1220</b>	132	1220
508.namd_r	128	<b>215</b>	<b>566</b>	215	567	215	566	128	215	566	<b>215</b>	<b>566</b>	215	566
510.parest_r	128	301	1110	303	1110	<b>301</b>	<b>1110</b>	128	301	1110	301	1110	<b>301</b>	<b>1110</b>
511.povray_r	128	<b>360</b>	<b>830</b>	359	832	362	825	128	<b>360</b>	<b>830</b>	359	832	362	825
519.lbm_r	128	243	555	242	557	<b>242</b>	<b>556</b>	128	244	554	242	558	<b>242</b>	<b>556</b>
521.wrf_r	128	267	1070	265	1080	<b>265</b>	<b>1080</b>	128	249	1150	247	1160	<b>248</b>	<b>1160</b>
526.blender_r	128	238	819	<b>240</b>	<b>811</b>	240	811	128	238	819	239	815	<b>239</b>	<b>816</b>
527.cam4_r	128	<b>256</b>	<b>874</b>	256	874	256	874	128	<b>256</b>	<b>874</b>	256	874	256	874
538.imagick_r	128	103	3080	104	3060	<b>104</b>	<b>3070</b>	128	103	3080	104	3060	<b>104</b>	<b>3070</b>
544.nab_r	128	177	1220	<b>177</b>	<b>1220</b>	177	1220	128	<b>176</b>	<b>1220</b>	176	1230	176	1220
549.fotonik3d_r	128	877	569	874	570	<b>877</b>	<b>569</b>	128	877	569	874	570	<b>877</b>	<b>569</b>
554.roms_r	128	<b>355</b>	<b>573</b>	356	571	355	573	128	<b>352</b>	<b>578</b>	352	578	351	579

SPECrate®2017\_fp\_base = **962**

SPECrate®2017\_fp\_peak = **969**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

```
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/aocczn4/amd\_rate\_aocc400\_znver4\_A\_lib/lib:/aocczn4/amd\_rate\_aocc400\_znver4\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

SR-IOV Support = Disabled

SVM Mode = Disabled

NUMA nodes per socket = NPS4

Determinism Control = Manual

Determinism Enable = Power

Engine Boost = Aggressive

TDP Control = Manual

TDP = 400

PPT Control = Manual

PPT = 400

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /aocczn4/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Oct 27 11:32:20 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
11:32:20 up 3 min, 1 user, load average: 0.51, 1.22, 0.62
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 11:30 20.00s 1.22s 0.13s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6190603
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6190603
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.223/templogs/preenv.fprate.223.0.log --lognum 223.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /aocczn4
```

#### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9384X 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 2
microcode       : 0xa101235
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1:  core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0:  apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1:  apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            128
On-line CPU(s) list: 0-127
Vendor ID:         AuthenticAMD
Model name:        AMD EPYC 9384X 32-Core Processor
CPU family:        25
Model:            17
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s):         2
Stepping:          2
Frequency boost:   enabled
CPU max MHz:       3911.3279
CPU min MHz:       1500.0000
BogoMIPS:          6200.13
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                  clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                  constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                  pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                  popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                  abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                  perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                  invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                  avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                  avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                  xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                  avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists  
pausefilter pfthreshold avic v\_vmsave\_vmload vgif v\_spec\_ctrl avx512vbmi  
umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg  
avx512\_vpopcntdq la57 rdpid overflow\_recov succor smca fsrm flush\_llid

Virtualization:

```

AMD-V
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 1.5 GiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	96M	1.5G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 193268 MB
node 0 free: 191829 MB
node 1 cpus: 8-15,72-79
node 1 size: 193519 MB
node 1 free: 193205 MB
node 2 cpus: 16-23,80-87
node 2 size: 193519 MB
node 2 free: 193248 MB
node 3 cpus: 24-31,88-95
node 3 size: 193519 MB
node 3 free: 193191 MB
node 4 cpus: 32-39,96-103
node 4 size: 193485 MB
node 4 free: 193179 MB
node 5 cpus: 40-47,104-111
node 5 size: 193519 MB
node 5 free: 193223 MB
node 6 cpus: 48-55,112-119
node 6 size: 193519 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

node 6 free: 192717 MB
node 7 cpus: 56-63,120-127
node 7 size: 193321 MB
node 7 free: 193032 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10

```

```

-----
9. /proc/meminfo
MemTotal:      1584819300 kB

```

```

-----
10. who -r
run-level 3 Oct 27 11:29

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target  Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
               irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
               postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
               wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
               chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
               firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
               issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap
               nvme-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
               snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator
               systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2
indirect       wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=bd4eeb48-8f2c-47c9-ae06-b7241b1d0eb7
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 3.10 GHz.
The governor "performance" may decide which speed to use
within this range.

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
19. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

-----  
20. Disk information

SPEC is set to: /aocczn4  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p4 xfs 2.0T 211G 1.8T 11% /

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id  
Vendor: ASUSTeK COMPUTER INC.  
Product: RS720A-E12-RS12  
Product Family: Server  
Serial: 123456789012

22. dmidecode  
Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
24x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends Inc.  
BIOS Version: 1002  
BIOS Date: 05/24/2023  
BIOS Revision: 10.2

### Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

```

-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

```

=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
 526.blender\_r: -funsigned-char -DSPEC\_LP64  
 527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
 -Wl,-mllvm -Wl,-reduce-array-computations=3  
 -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
 -march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
 -mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
 -fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
 -zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
 -Wl,-mllvm -Wl,-reduce-array-computations=3  
 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
 -fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100  
 -finline-aggressive -mllvm -loop-unswitch-threshold=200000  
 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
 -lflang

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
 -Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

538.imagick\_r: basepeak = yes

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

554.roms\_r (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

```
526.blender_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm
-lamdalloc
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_fp\_base = 962

SPECrate®2017\_fp\_peak = 969

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.4.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.4.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-26 23:32:19-0400.

Report generated on 2023-11-21 20:33:48 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.