



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

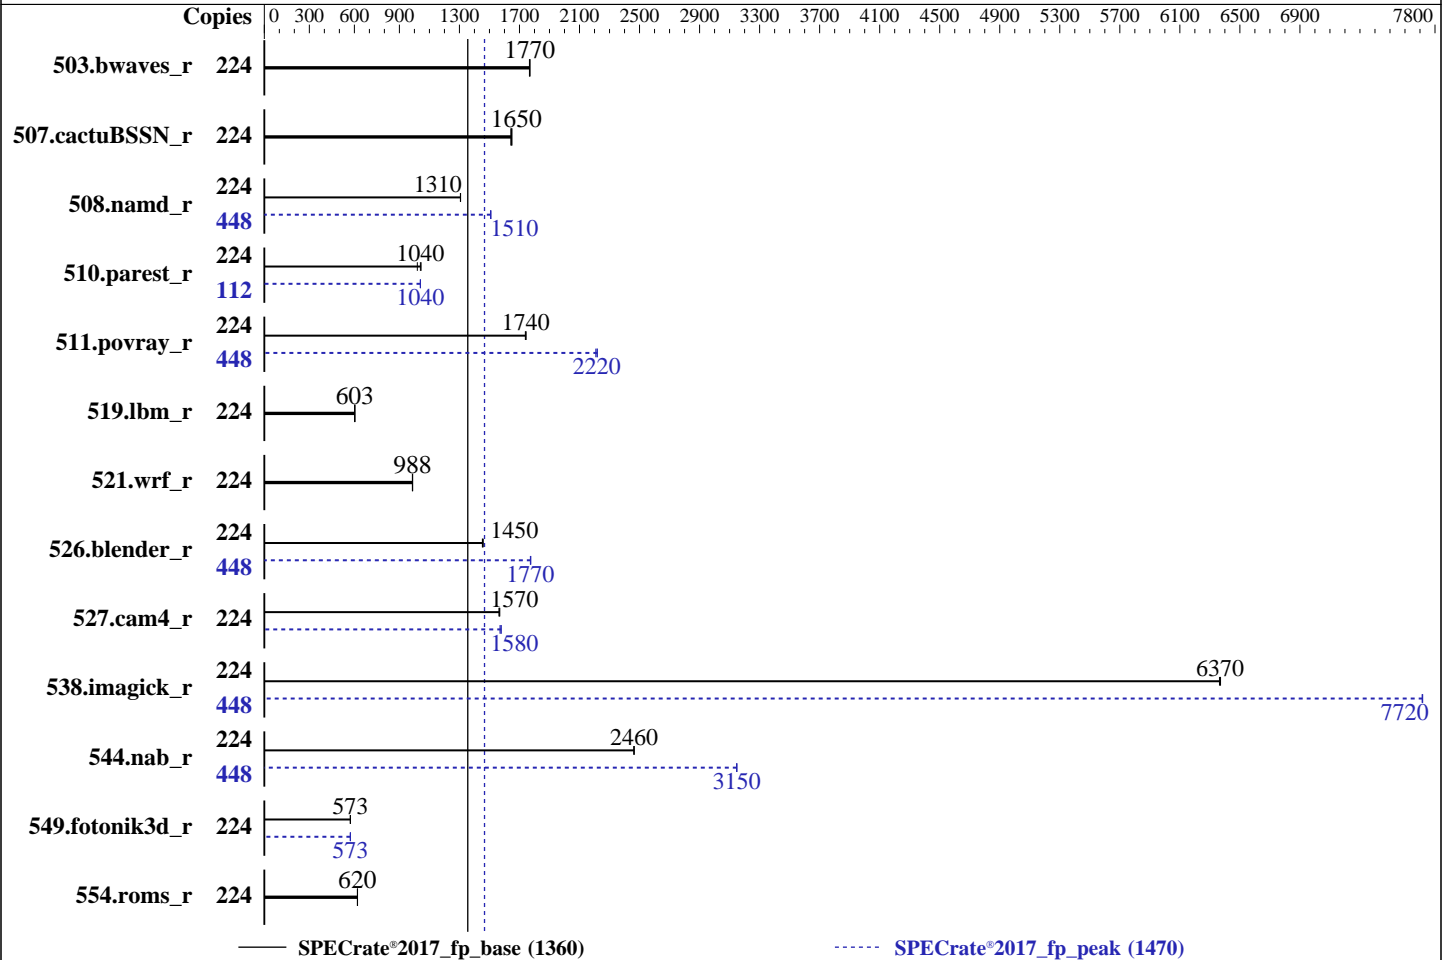

### Hardware

CPU Name: AMD EPYC 9734  
 Max MHz: 3000  
 Nominal: 2200  
 Enabled: 224 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 16 MB shared / 7 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 4.0 TB PCIe NVMe SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1002 released May-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	1272	1770	1269	1770	<u>1270</u>	<u>1770</u>	224	1272	1770	1269	1770	<u>1270</u>	<u>1770</u>
507.cactuBSSN_r	224	<u>172</u>	<u>1650</u>	172	1650	173	1640	224	<u>172</u>	<u>1650</u>	172	1650	173	1640
508.namd_r	224	163	1310	163	1310	<u>163</u>	<u>1310</u>	448	282	1510	282	1510	<u>282</u>	<u>1510</u>
510.parest_r	224	<u>563</u>	<u>1040</u>	575	1020	561	1040	112	282	1040	<u>282</u>	<u>1040</u>	282	1040
511.povray_r	224	301	1740	300	1740	<u>300</u>	<u>1740</u>	448	<u>472</u>	<u>2220</u>	474	2210	471	2220
519.lbm_r	224	<u>392</u>	<u>603</u>	392	602	391	603	224	<u>392</u>	<u>603</u>	392	602	391	603
521.wrf_r	224	509	986	<u>508</u>	<u>988</u>	508	988	224	509	986	<u>508</u>	<u>988</u>	508	988
526.blender_r	224	<u>235</u>	<u>1450</u>	234	1460	235	1450	448	384	1780	<u>385</u>	<u>1770</u>	385	1770
527.cam4_r	224	<u>250</u>	<u>1570</u>	250	1560	250	1570	224	248	1580	<u>249</u>	<u>1580</u>	250	1570
538.imagick_r	224	87.5	6360	<u>87.5</u>	<u>6370</u>	87.4	6370	448	<u>144</u>	<u>7720</u>	144	7720	144	7720
544.nab_r	224	153	2460	153	2460	<u>153</u>	<u>2460</u>	448	<u>240</u>	<u>3150</u>	240	3150	240	3150
549.fotonik3d_r	224	<u>1523</u>	<u>573</u>	1523	573	1522	573	224	<u>1522</u>	<u>573</u>	1522	573	1523	573
554.roms_r	224	574	620	573	621	<u>574</u>	<u>620</u>	224	574	620	573	621	<u>574</u>	<u>620</u>

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/aocczn4/amd\_rate\_aocc400\_znver4\_A\_lib/lib:/aocczn4/amd\_rate\_aocc400\_znver4\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Configuration:

SR-IOV Support = Disabled

SVM Mode = Disabled

NUMA nodes per socket = NPS4

Determinism Control = Manual

Determinism Enable = Power

Engine Boost = Aggressive

TDP Control = Manual

TDP = 400

PPT Control = Manual

PPT = 400

L2 Stream HW Prefetcher = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /aocczn4/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sat Nov 18 02:47:20 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
02:47:20 up 11:39, 1 user, load average: 17.78, 102.33, 183.87
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1     -             15:10   11:19m 1.68s  0.26s /bin/bash ./amd_rate_aocc400_znver4_A1.sh

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6190564
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6190564
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.315/templogs/preenv.fprate.315.0.log --lognum 315.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /aocczn4

```

#### 6. /proc/cpuinfo

```

model name      : AMD EPYC 9734 112-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa0020e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 112
siblings       : 224
2 physical ids (chips)
448 processors (hardware threads)
physical id 0: core ids
0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94,96-102,104-110,112-118,120-126
physical id 1: core ids
0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94,96-102,104-110,112-118,120-126
physical id 0: apicids
0-13,16-29,32-45,48-61,64-77,80-93,96-109,112-125,128-141,144-157,160-173,176-189,192-205,208-221,224-237,240-253
physical id 1: apicids
256-269,272-285,288-301,304-317,320-333,336-349,352-365,368-381,384-397,400-413,416-429,432-445,448-461,464-477,480-493,496-509

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                448
On-line CPU(s) list:   0-447
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9734 112-Core Processor
CPU family:            25
Model:                 160
Thread(s) per core:    2
Core(s) per socket:    112
Socket(s):              2
Stepping:              2
Frequency boost:       enabled
CPU max MHz:           2999.2180
CPU min MHz:           1500.0000
BogoMIPS:              4399.98
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrp_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V

```

#### Virtualization:

```

L1d cache: 7 MiB (224 instances)
L1i cache: 7 MiB (224 instances)
L2 cache: 224 MiB (224 instances)
L3 cache: 512 MiB (32 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-27,224-251
NUMA node1 CPU(s): 28-55,252-279
NUMA node2 CPU(s): 56-83,280-307
NUMA node3 CPU(s): 84-111,308-335
NUMA node4 CPU(s): 112-139,336-363
NUMA node5 CPU(s): 140-167,364-391
NUMA node6 CPU(s): 168-195,392-419
NUMA node7 CPU(s): 196-223,420-447
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

#### From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	7M	8	Data	1	64	1	64
L1i	32K	7M	8	Instruction	1	64	1	64
L2	1M	224M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

#### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-27,224-251
node 0 size: 193268 MB
node 0 free: 191306 MB
node 1 cpus: 28-55,252-279
node 1 size: 193519 MB
node 1 free: 192014 MB
node 2 cpus: 56-83,280-307
node 2 size: 193519 MB
node 2 free: 191938 MB
node 3 cpus: 84-111,308-335
node 3 size: 193519 MB
node 3 free: 192003 MB
node 4 cpus: 112-139,336-363

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

node 4 size: 193485 MB
node 4 free: 191485 MB
node 5 cpus: 140-167,364-391
node 5 size: 193519 MB
node 5 free: 191975 MB
node 6 cpus: 168-195,392-419
node 6 size: 193519 MB
node 6 free: 192056 MB
node 7 cpus: 196-223,420-447
node 7 size: 193311 MB
node 7 free: 191798 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10

```

```

-----
9. /proc/meminfo
MemTotal:      1584809180 kB

```

```

-----
10. who -r
run-level 3 Nov 17 15:10

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target  Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
               irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
               postfix purge-kernels rollback rsyslog smartd sshd wickedd wickedd-auto4 wickedd-dhcp4
               wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
               chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
               firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
               issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap
               nvme-fc-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
               snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator
               systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2
indirect        wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=bd4eeb48-8f2c-47c9-ae06-b7241b1d0eb7
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
boost state support:
  Supported: yes
  Active: yes
-----
```

```
-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

#### 20. Disk information

SPEC is set to: /aocczn4

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	xfss	2.0T	201G	1.9T	10%	/

#### 21. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.  
 Product: RS720A-E12-RS12  
 Product Family: Server  
 Serial: 123456789012

#### 22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

#### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.  
 BIOS Version: 1002  
 BIOS Date: 05/24/2023  
 BIOS Revision: 10.2

### Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)  
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====
```

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

### Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

### Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

```
538.imagick_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2023

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

549.fotonik3d\_r (continued):

```
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

```
527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc
```

```
526.blender_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm
-lamdalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 1360

SPECrate®2017\_fp\_peak = 1470

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.6.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.6.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-17 13:47:20-0500.

Report generated on 2024-01-03 17:31:17 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-02.