



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573


Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

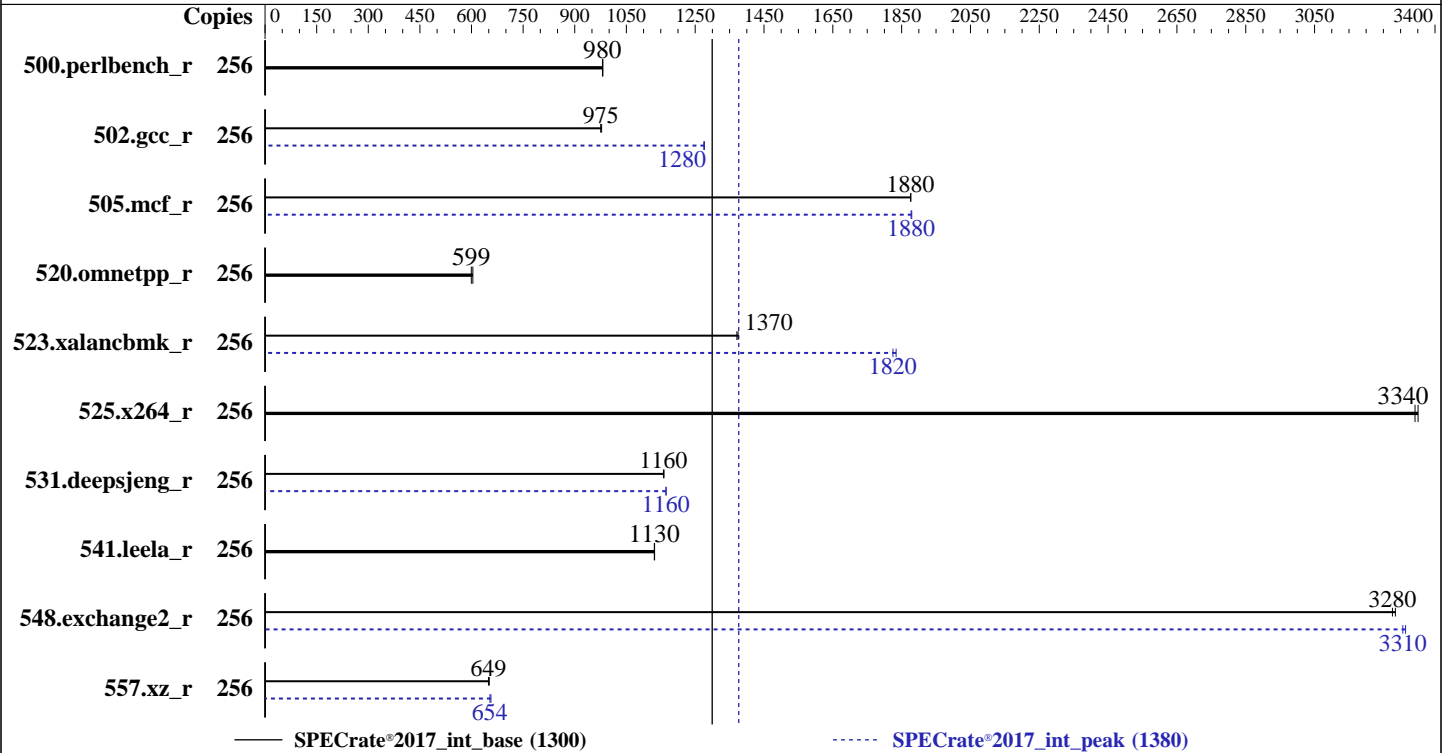

### Hardware

CPU Name: AMD EPYC 9554  
 Max MHz: 3750  
 Nominal: 3100  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 130 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.3 LTS  
 5.15.0-84-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.4.6 released Jul-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2023  
Hardware Availability: Feb-2023  
Software Availability: Sep-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	415	982	<b>416</b>	<b>980</b>			256	415	982	<b>416</b>	<b>980</b>		
502.gcc_r	256	371	978	<b>372</b>	<b>975</b>			256	284	1280	<b>284</b>	<b>1280</b>		
505.mcf_r	256	220	1880	<b>220</b>	<b>1880</b>			256	220	1880	<b>220</b>	<b>1880</b>		
520.omnetpp_r	256	<b>560</b>	<b>599</b>	556	604			256	<b>560</b>	<b>599</b>	556	604		
523.xalancbmk_r	256	197	1370	<b>197</b>	<b>1370</b>			256	147	1830	<b>148</b>	<b>1820</b>		
525.x264_r	256	<b>134</b>	<b>3340</b>	134	3350			256	<b>134</b>	<b>3340</b>	134	3350		
531.deepsjeng_r	256	<b>253</b>	<b>1160</b>	253	1160			256	<b>252</b>	<b>1160</b>	252	1170		
541.leela_r	256	<b>375</b>	<b>1130</b>	374	1130			256	<b>375</b>	<b>1130</b>	374	1130		
548.exchange2_r	256	204	3280	<b>205</b>	<b>3280</b>			256	<b>203</b>	<b>3310</b>	202	3310		
557.xz_r	256	424	652	<b>426</b>	<b>649</b>			256	<b>423</b>	<b>654</b>	421	656		

SPECrate®2017\_int\_base = **1300**

SPECrate®2017\_int\_peak = **1380**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_rate_aocc400_znver4_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 130 GB ramdisk created with the cmd: "mount -t tmpfs -o size=130G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
```

```
Virtualization Technology : Disabled
NUMA Nodes per Socket : 4
```

```
System Profile : Custom
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link
Power Management : Disabled
Determinism Slider : Power Determinism
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-spa Thu Oct 19 15:46:55 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

## Platform Notes (Continued)

- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux amd-spa 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:46:55 up 22:53, 2 users, load average: 0.27, 0.11, 0.04
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 25Nov61 23.00s 1.90s 0.44s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
root pts/0 10.168.103.74 10:45 5:01m 0.00s 0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 6190216
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8 --output_format html,pdf,txt
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

**CPU2017 License:** 6573

**Test Date:** Oct-2023

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Feb-2023

**Tested by:** Dell Inc.

**Software Availability:** Sep-2023

## Platform Notes (Continued)

```
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define
DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8 --output_format html,pdf,txt intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define
DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8 --output_format html,pdf,txt --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9554 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping      : 1
microcode     : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 64
siblings      : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9554 64-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3762.9880
CPU min MHz:           1500.0000
BogoMIPS:              6201.53
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                        rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                        movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                        cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                        topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Sep-2023

### Platform Notes (Continued)

```
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmcall
fsgsbase bmil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lld
```

```
Virtualization: AMD-V
L1d cache: 4 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-15,128-143
node 0 size: 193072 MB
node 0 free: 191853 MB
node 1 cpus: 16-31,144-159
node 1 size: 193527 MB
node 1 free: 192492 MB
node 2 cpus: 32-47,160-175
node 2 size: 193527 MB
node 2 free: 192462 MB
node 3 cpus: 48-63,176-191
node 3 size: 193511 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

```

node 3 free: 188751 MB
node 4 cpus: 64-79,192-207
node 4 size: 193527 MB
node 4 free: 192531 MB
node 5 cpus: 80-95,208-223
node 5 size: 193479 MB
node 5 free: 192487 MB
node 6 cpus: 96-111,224-239
node 6 size: 193527 MB
node 6 free: 192543 MB
node 7 cpus: 112-127,240-255
node 7 size: 193495 MB
node 7 free: 192474 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

```

9. /proc/meminfo
   MemTotal:      1584811424 kB

```

```

10. who -r
    run-level 5 Nov 25 17:42

```

```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
    Default Target   Status
    graphical        running

```

```

12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd
           getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors
           lvm2-monitor lxd-agent multipathd networkd-dispatcher open-vm-tools pollinate rsyslog
           secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved
           systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled     console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@
           systemd-boot-check-no-failures systemd-network-generator systemd-sysext
           systemd-time-wait-sync upower
generated    apport
indirect     uuuid
masked       cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
           systemd-networkd-wait-online x11-common

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/vmlinuz-5.15.0-84-generic
    root=/dev/mapper/ubuntu--vg-ubuntu--lv
    ro

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

### 14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 1.50 GHz and 3.10 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 3100MHz

### 15. tuned-adm active

Current active profile: latency-performance

### 16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

### 17. /sys/kernel/mm/transparent\_hugepage

```

defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

### 18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

### 19. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

### 20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	130G	3.4G	127G	3%	/mnt/ramdisk

### 21. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.  
 Product: PowerEdge R7625  
 Product Family: PowerEdge  
 Serial: SLR7601

### 22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
24x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
 BIOS Version: 1.4.6  
 BIOS Date: 07/06/2023  
 BIOS Revision: 1.4

## Compiler Version Notes

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2023  
Hardware Availability: Feb-2023  
Software Availability: Sep-2023

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdallic
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Sep-2023

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Peak Portability Flags (Continued)

```

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

```

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

```

```

505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc

```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlbm -lamalloc-ext
```

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlbm
-lflang -lamalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1300

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECrate®2017\_int\_peak = 1380

**CPU2017 License:** 6573

**Test Date:** Oct-2023

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Feb-2023

**Tested by:** Dell Inc.

**Software Availability:** Sep-2023

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.html](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.xml](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-19 11:46:54-0400.

Report generated on 2024-01-03 17:37:55 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-02.