



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro


SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2023  
Hardware Availability: Nov-2023  
Software Availability: Dec-2023

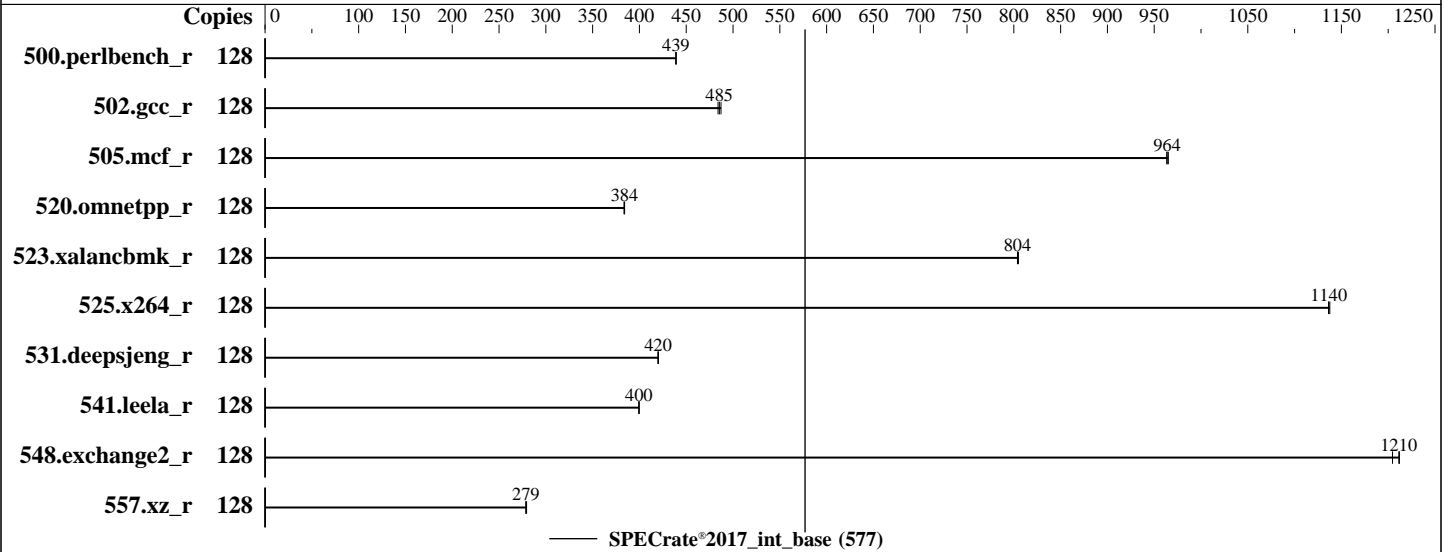

### Hardware

CPU Name: Intel Xeon Gold 6448Y  
Max MHz: 4100  
Nominal: 2100  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 60 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 960 GB M.2 NVME SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
5.14.21-150500.53-default  
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran  
Compiler for Linux;  
Parallel: No  
Firmware: Version 2.1 released Nov-2023  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of  
additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2023  
Hardware Availability: Nov-2023  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	464	439	464	439	<b>464</b>	<b>439</b>							
502.gcc_r	128	372	487	<b>373</b>	<b>485</b>	375	484							
505.mcf_r	128	215	963	214	965	<b>215</b>	<b>964</b>							
520.omnetpp_r	128	438	383	<b>437</b>	<b>384</b>	437	384							
523.xalancbmk_r	128	168	805	168	804	<b>168</b>	<b>804</b>							
525.x264_r	128	<b>197</b>	<b>1140</b>	197	1140	197	1140							
531.deepsjeng_r	128	<b>349</b>	<b>420</b>	349	420	349	420							
541.leela_r	128	531	399	530	400	<b>531</b>	<b>400</b>							
548.exchange2_r	128	<b>277</b>	<b>1210</b>	277	1210	278	1200							
557.xz_r	128	495	279	496	279	<b>496</b>	<b>279</b>							

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Dec-2023

### General Notes (Continued)

is mitigated in the system as tested and documented.

### Platform Notes

#### BIOS Settings:

Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Extreme Performance  
KTI Prefetch = Enable  
SNC = Enable SNC2 (2-clusters)  
DCU Streamer Prefetcher = Disable  
LLC Dead Line Alloc = Disable  
Fan Mode: Full Speed

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on 113-6 Thu Nov 30 18:03:24 2023

SUT (System Under Test) info as seen by some common utilities.

#### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux 113-6 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043) x86_64
x86_64 x86_64 GNU/Linux

```

```

2. w
18:03:24 up 5 min, 3 users, load average: 0.10, 0.10, 0.04
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      tty1     -             18:02       1.00s       0.82s       0.02s      -bash

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

#### 3. Username

From environment variable \$USER: root

#### 4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4125029
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4125029
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/temlogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

#### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6448Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6448Y
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               8
CPU max MHz:           4100.0000
CPU min MHz:           800.0000
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):    0-15,64-79
NUMA node1 CPU(s):    16-31,80-95
NUMA node2 CPU(s):    32-47,96-111
NUMA node3 CPU(s):    48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 257606 MB
node 0 free: 256227 MB
node 1 cpus: 16-31,80-95
node 1 size: 258039 MB
node 1 free: 257325 MB
node 2 cpus: 32-47,96-111
node 2 size: 258005 MB
node 2 free: 257160 MB
node 3 cpus: 48-63,112-127
node 3 size: 257636 MB
node 3 free: 256923 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056039464 kB

10. who -r

run-level 3 Nov 30 18:02 last=5

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
graphical      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early
klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables
exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
nvme-autoconnect ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
update-system-flatpaks upower vncserver@
indirect wickedd

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=61728338-1a1e-4dd4-b832-16beafe26c70
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=364M,high
crashkernel=72M,low
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5  
-----

-----  
19. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p5 btrfs 563G 72G 490G 13% /home  
-----

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Supermicro  
Product: Super Server  
Product Family: Family  
Serial: 0123456789  
-----

-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x SK Hynix HMC94MEBRA109N 64 GB 2 rank 4800  
-----

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 2.1  
BIOS Date: 11/30/2023  
BIOS Revision: 5.32  
-----

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Dec-2023

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-621H-TN12R  
(X13DEM , Intel Xeon Gold 6448Y)

SPECrate®2017\_int\_base = 577

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Dec-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-30 21:03:24-0500.  
Report generated on 2024-01-08 13:58:04 by CPU2017 PDF formatter v6716.  
Originally published on 2024-01-02.