



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Date: Dec-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

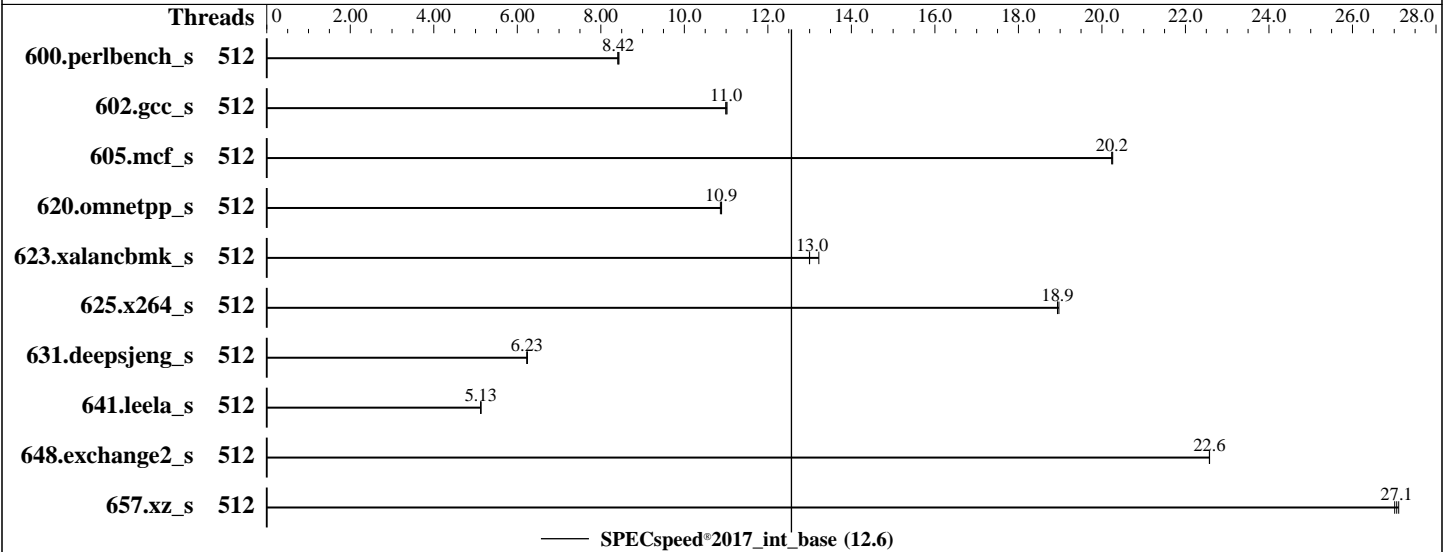

Hardware

CPU Name: Intel Xeon Platinum 8454H
 Max MHz: 3400
 Nominal: 2100
 Enabled: 256 cores, 8 chips, 2 threads/core
 Orderable: 8 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 82.5 MB I+D on chip per chip
 Other: None
 Memory: 4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 Kernel 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version EBE1040-1.10 released Dec-2023;
 tested with pre-release version EBE103M-1.10
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_base = 12.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	512	211	8.42	211	8.41	210	8.43							
602.gcc_s	512	362	11.0	361	11.0	362	11.0							
605.mcf_s	512	233	20.2	233	20.3	233	20.2							
620.omnetpp_s	512	150	10.9	150	10.9	150	10.9							
623.xalancbmk_s	512	109	13.0	107	13.2	109	13.0							
625.x264_s	512	93.1	18.9	93.2	18.9	93.0	19.0							
631.deepsjeng_s	512	230	6.23	230	6.24	230	6.23							
641.leela_s	512	333	5.13	333	5.13	333	5.12							
648.exchange2_s	512	130	22.6	130	22.6	130	22.6							
657.xz_s	512	228	27.1	229	27.0	228	27.1							

SPECspeed®2017_int_base = 12.6

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/home/cpu2017-1.1.9-ic2023.2.3/lib/intel164:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC2

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Dec 20 04:34:56 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
04:34:56 up 3:54, 1 user, load average: 0.30, 4.17, 3.71
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root     tty1      00:40   3:48m  0.96s  0.00s /bin/bash ./speccpu_rock.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

file size                (blocks, -f) unlimited
pending signals          (-i) 16512059
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 16512059
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash ./speccpu_rock.sh
/bin/bash ./speccpu_rock.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=256 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=256 --tune base --output_format all
  --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base
  --size refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.099/temlogs/preenv.intspeed.099.0.log --lognum 099.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8454H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0004b1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 32
siblings       : 64
8 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 4: core ids 0-31
physical id 5: core ids 0-31
physical id 6: core ids 0-31
physical id 7: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447
physical id 4: apicids 512-575
physical id 5: apicids 640-703
physical id 6: apicids 768-831

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 7: apicids 896-959

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 512
On-line CPU(s) list:   0-511
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Platinum 8454H
BIOS Model name:       Intel(R) Xeon(R) Platinum 8454H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              8
Stepping:               8
CPU max MHz:            3400.0000
CPU min MHz:            800.0000
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmlil avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8
                        flush_lld arch_capabilities
Virtualization:         VT-x
L1d cache:              12 MiB (256 instances)
L1i cache:              8 MiB (256 instances)
L2 cache:               512 MiB (256 instances)
L3 cache:               660 MiB (8 instances)
NUMA node(s):          16
NUMA node0 CPU(s):     0-15,256-271
NUMA node1 CPU(s):     16-31,272-287
NUMA node2 CPU(s):     32-47,288-303
NUMA node3 CPU(s):     48-63,304-319
NUMA node4 CPU(s):     64-79,320-335
NUMA node5 CPU(s):     80-95,336-351
NUMA node6 CPU(s):     96-111,352-367
NUMA node7 CPU(s):     112-127,368-383
NUMA node8 CPU(s):     128-143,384-399

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

NUMA node9 CPU(s):      144-159,400-415
NUMA node10 CPU(s):     160-175,416-431
NUMA node11 CPU(s):     176-191,432-447
NUMA node12 CPU(s):     192-207,448-463
NUMA node13 CPU(s):     208-223,464-479
NUMA node14 CPU(s):     224-239,480-495
NUMA node15 CPU(s):     240-255,496-511
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                           sequence
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	2M	512M	16	Unified	2	2048	1	64
L3	82.5M	660M	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-15,256-271
node 0 size: 257505 MB
node 0 free: 256848 MB
node 1 cpus: 16-31,272-287
node 1 size: 258040 MB
node 1 free: 257640 MB
node 2 cpus: 32-47,288-303
node 2 size: 258040 MB
node 2 free: 257619 MB
node 3 cpus: 48-63,304-319
node 3 size: 258040 MB
node 3 free: 257601 MB
node 4 cpus: 64-79,320-335
node 4 size: 258040 MB
node 4 free: 257561 MB
node 5 cpus: 80-95,336-351
node 5 size: 258040 MB
node 5 free: 257610 MB
node 6 cpus: 96-111,352-367
node 6 size: 258040 MB
node 6 free: 257536 MB
node 7 cpus: 112-127,368-383
node 7 size: 258040 MB
node 7 free: 255639 MB
node 8 cpus: 128-143,384-399
node 8 size: 258040 MB
node 8 free: 257651 MB
node 9 cpus: 144-159,400-415
node 9 size: 258040 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

node 9 free: 257621 MB
node 10 cpus: 160-175,416-431
node 10 size: 258040 MB
node 10 free: 257643 MB
node 11 cpus: 176-191,432-447
node 11 size: 258040 MB
node 11 free: 257658 MB
node 12 cpus: 192-207,448-463
node 12 size: 258040 MB
node 12 free: 257162 MB
node 13 cpus: 208-223,464-479
node 13 size: 258040 MB
node 13 free: 257154 MB
node 14 cpus: 224-239,480-495
node 14 size: 258040 MB
node 14 free: 257689 MB
node 15 cpus: 240-255,496-511
node 15 size: 257977 MB
node 15 free: 256106 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 21 21 21 21 31 31 31 31 21 21 21 21 31 31
1:  12 10 21 21 21 21 31 31 31 31 21 21 21 21 31 31
2:  21 21 10 12 31 31 21 21 21 21 31 31 31 31 21 21
3:  21 21 12 10 31 31 21 21 21 21 31 31 31 31 21 21
4:  21 21 31 31 10 12 21 21 21 21 31 31 31 31 21 21
5:  21 21 31 31 12 10 21 21 21 21 31 31 31 31 21 21
6:  31 31 21 21 21 21 10 12 31 31 21 21 21 21 31 31
7:  31 31 21 21 21 21 12 10 31 31 21 21 21 21 31 31
8:  31 31 21 21 21 21 31 31 10 12 21 21 21 21 31 31
9:  31 31 21 21 21 21 31 31 12 10 21 21 21 21 31 31
10: 21 21 31 31 31 31 21 21 21 21 10 12 31 31 21 21
11: 21 21 31 31 31 31 21 21 21 21 12 10 31 31 21 21
12: 21 21 31 31 31 31 21 21 21 21 31 31 10 12 21 21
13: 21 21 31 31 31 31 21 21 21 21 31 31 12 10 21 21
14: 31 31 21 21 21 21 31 31 31 31 21 21 21 21 10 12
15: 31 31 21 21 21 21 31 31 31 31 21 21 21 21 12 10

```

```

9. /proc/meminfo
   MemTotal:      4227128000 kB

```

```

10. who -r
    run-level 3 Dec 20 00:40

```

```

11. Systemd service manager version: systemd 252 (252-13.el9_2)
    Default Target   Status
    multi-user       degraded

```

```

12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD ACTIVE SUB    DESCRIPTION
    * dnf-makecache.service loaded failed failed dnf makecache

```

```

13. Services, from systemctl list-unit-files
    STATE UNIT FILES
    enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime      systemd-remount-fs
disabled            canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                    chrony-wait console-getty cpupower debug-shell dnf-system-upgrade kvm_stat
                    man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
                    selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
                    systemd-pstore systemd-sysexit
indirect            sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                    systemd-sysupdate-reboot

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=UUID=116409c2-57ac-4857-ace6-bb315b1769ff
ro
resume=UUID=075e4fda-52f2-4584-8323-c813820fb1bd

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
boost state support:
  Supported: yes
  Active: yes

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdc4 xfs 371G 236G 136G 64% /home

21. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR950 V3
Product Family: ThinkSystem
Serial: BLRSDV044

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
41x SK Hynix HMC94AEBRA102N 64 GB 2 rank 4800
14x SK Hynix HMC94AEBRA109N 64 GB 2 rank 4800
9x SK Hynix HMC94AEBRA123N 64 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: EBE103M-1.10
BIOS Date: 10/10/2023
BIOS Revision: 1.10
Firmware Revision: 1.10

Compiler Version Notes

=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Compiler Version Notes (Continued)

C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 12.6

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-19 15:34:56-0500.
Report generated on 2024-01-17 09:58:28 by CPU2017 PDF formatter v6716.
Originally published on 2024-01-17.