



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion


FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

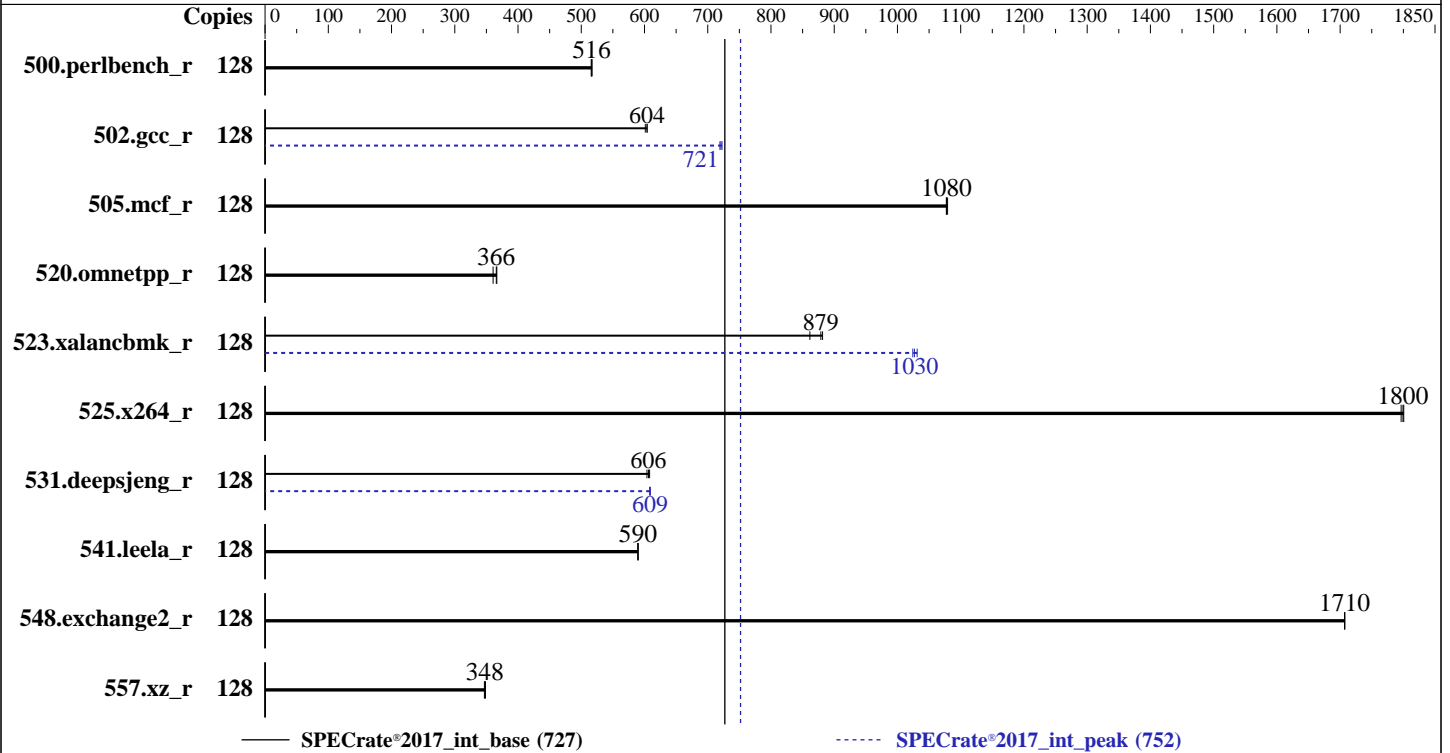

Hardware

CPU Name: AMD EPYC 9334
 Max MHz: 3900
 Nominal: 2700
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.06.29 released Nov-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|-------------------|--------------------|-------------------|-------------------|-------------------|--------------------|--------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 128 | 394 | 517 | <u>395</u> | <u>516</u> | 395 | 516 | 128 | 394 | 517 | <u>395</u> | <u>516</u> | 395 | 516 |
| 502.gcc_r | 128 | <u>300</u> | <u>604</u> | 300 | 604 | 301 | 601 | 128 | 251 | 723 | <u>251</u> | <u>721</u> | 252 | 719 |
| 505.mcf_r | 128 | 192 | 1080 | 192 | 1080 | <u>192</u> | <u>1080</u> | 128 | 192 | 1080 | 192 | 1080 | <u>192</u> | <u>1080</u> |
| 520.omnetpp_r | 128 | 458 | 366 | <u>459</u> | <u>366</u> | 466 | 361 | 128 | 458 | 366 | <u>459</u> | <u>366</u> | 466 | 361 |
| 523.xalancbmk_r | 128 | 157 | 862 | <u>154</u> | <u>879</u> | 153 | 882 | 128 | 131 | 1030 | <u>132</u> | <u>1030</u> | 132 | 1020 |
| 525.x264_r | 128 | <u>125</u> | <u>1800</u> | 124 | 1800 | 125 | 1800 | 128 | <u>125</u> | <u>1800</u> | 124 | 1800 | 125 | 1800 |
| 531.deepsjeng_r | 128 | 243 | 604 | <u>242</u> | <u>606</u> | 241 | 608 | 128 | <u>241</u> | <u>609</u> | 241 | 608 | 241 | 609 |
| 541.leela_r | 128 | 360 | 589 | 359 | 590 | <u>359</u> | <u>590</u> | 128 | 360 | 589 | 359 | 590 | <u>359</u> | <u>590</u> |
| 548.exchange2_r | 128 | <u>196</u> | <u>1710</u> | 196 | 1710 | 196 | 1710 | 128 | <u>196</u> | <u>1710</u> | 196 | 1710 | 196 | 1710 |
| 557.xz_r | 128 | 397 | 349 | <u>398</u> | <u>348</u> | 399 | 347 | 128 | 397 | 349 | <u>398</u> | <u>348</u> | 399 | 347 |

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

```
TDP: 400  
Determinism Enable set to Power  
PPT: 400  
NPS: 4
```

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Sat Jan 13 06:06:48 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
06:06:48 up 7 min, 1 user, load average: 0.10, 0.45, 0.38
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 06:00 1:04 0.98s 0.00s tail -100f nohup.out

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6191057
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6191057
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.005/templogs/preenv.intrate.005.0.log --lognum 005.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : AMD EPYC 9334 32-Core Processor
vendor_id : AuthenticAMD

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa101121
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 64-127

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9334 32-Core Processor
BIOS Model name:      AMD EPYC 9334 32-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
Stepping:              1
Frequency boost:      enabled
CPU max MHz:          3910.2529
CPU min MHz:          1500.0000
BogoMIPS:              5400.06
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:       AMD-V
L1d cache:            2 MiB (64 instances)
L1i cache:            2 MiB (64 instances)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

L2 cache:                64 MiB (64 instances)
L3 cache:                256 MiB (8 instances)
NUMA node(s):           8
NUMA node0 CPU(s):      0-7,64-71
NUMA node1 CPU(s):      8-15,72-79
NUMA node2 CPU(s):      16-23,80-87
NUMA node3 CPU(s):      24-31,88-95
NUMA node4 CPU(s):      32-39,96-103
NUMA node5 CPU(s):      40-47,104-111
NUMA node6 CPU(s):      48-55,112-119
NUMA node7 CPU(s):      56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                          filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 32K | 2M | 8 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 2M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 64M | 8 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 32M | 256M | 16 | Unified | 3 | 32768 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 95943 MB
node 0 free: 95231 MB
node 1 cpus: 8-15,72-79
node 1 size: 96764 MB
node 1 free: 96370 MB
node 2 cpus: 16-23,80-87
node 2 size: 96728 MB
node 2 free: 96326 MB
node 3 cpus: 24-31,88-95
node 3 size: 96764 MB
node 3 free: 96367 MB
node 4 cpus: 32-39,96-103
node 4 size: 96764 MB
node 4 free: 96414 MB
node 5 cpus: 40-47,104-111
node 5 size: 96764 MB
node 5 free: 96392 MB
node 6 cpus: 48-55,112-119
node 6 size: 96764 MB
node 6 free: 96374 MB
node 7 cpus: 56-63,120-127
node 7 size: 96715 MB
node 7 free: 96240 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10

```

```

-----
9. /proc/meminfo
   MemTotal:      791765572 kB

```

```

-----
10. who -r
    run-level 3 Jan 13 05:59

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target  Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                   dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
                   rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2
    enabled-runtime systemd-remount-fs
    disabled        console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat man-db-restart-cache-update
                   nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-pstore systemd-sysex
    indirect        sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hdl,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
    root=UUID=da6bcd86-e169-49dc-be09-79aca5bc5a8d
    ro
    crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
    resume=UUID=73e1e4c9-f998-43cc-8ff7-916ce4b89f9b
    nohz_full=1-127

```

```

-----
14. cpupower frequency-info
    analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.70 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

    boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2700MHz

```

```

-----
15. tuned-adm active
    Current active profile: throughput-performance

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

16. sysctl
   kernel.numa_balancing      1
   kernel.randomize_va_space 0
   vm.compaction_proactiveness 20
   vm.dirty_background_bytes  0
   vm.dirty_background_ratio  10
   vm.dirty_bytes             0
   vm.dirty_expire_centisecs  3000
   vm.dirty_ratio             8
   vm.dirty_writeback_centisecs 500
   vm.dirtytime_expire_seconds 43200
   vm.extfrag_threshold       500
   vm.min_unmapped_ratio      1
   vm.nr_hugepages            0
   vm.nr_hugepages_mempolicy  0
   vm.nr_overcommit_hugepages 0
   vm.swappiness              1
   vm.watermark_boost_factor  15000
   vm.watermark_scale_factor  10
   vm.zone_reclaim_mode       1

-----
17. /sys/kernel/mm/transparent_hugepage
   defrag      [always] defer defer+madvise madvise never
   enabled     [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release      Red Hat Enterprise Linux 9.0 (Plow)
   redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
   system-release  Red Hat Enterprise Linux release 9.0 (Plow)

-----
20. Disk information
   SPEC is set to: /home/cpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sdb3       xfs   719G  9.0G  710G   2% /home

-----
21. /sys/devices/virtual/dmi/id
   Product:      2258 V7
   Product Family: Genoa

-----
22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Micron Technology MTC20F2085S1RC48BA1 32 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: INSYDE Corp.
BIOS Version: 1.06.29
BIOS Date: 11/23/2023
BIOS Revision: 1.6

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 523.xalancbmk_r(peak)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
Fortran | 548.exchange2_r(base, peak)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM  
-ffast-math -finline-aggressive  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -lamdalloc-ext
```

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9334

SPECrate®2017_int_base = 727

SPECrate®2017_int_peak = 752

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jan-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-12 17:06:47-0500.

Report generated on 2024-01-30 23:27:55 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-30.