



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

**SPECrate®2017\_int\_base = 339**

**SPECrate®2017\_int\_peak = 348**

**CPU2017 License:** 6042


**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

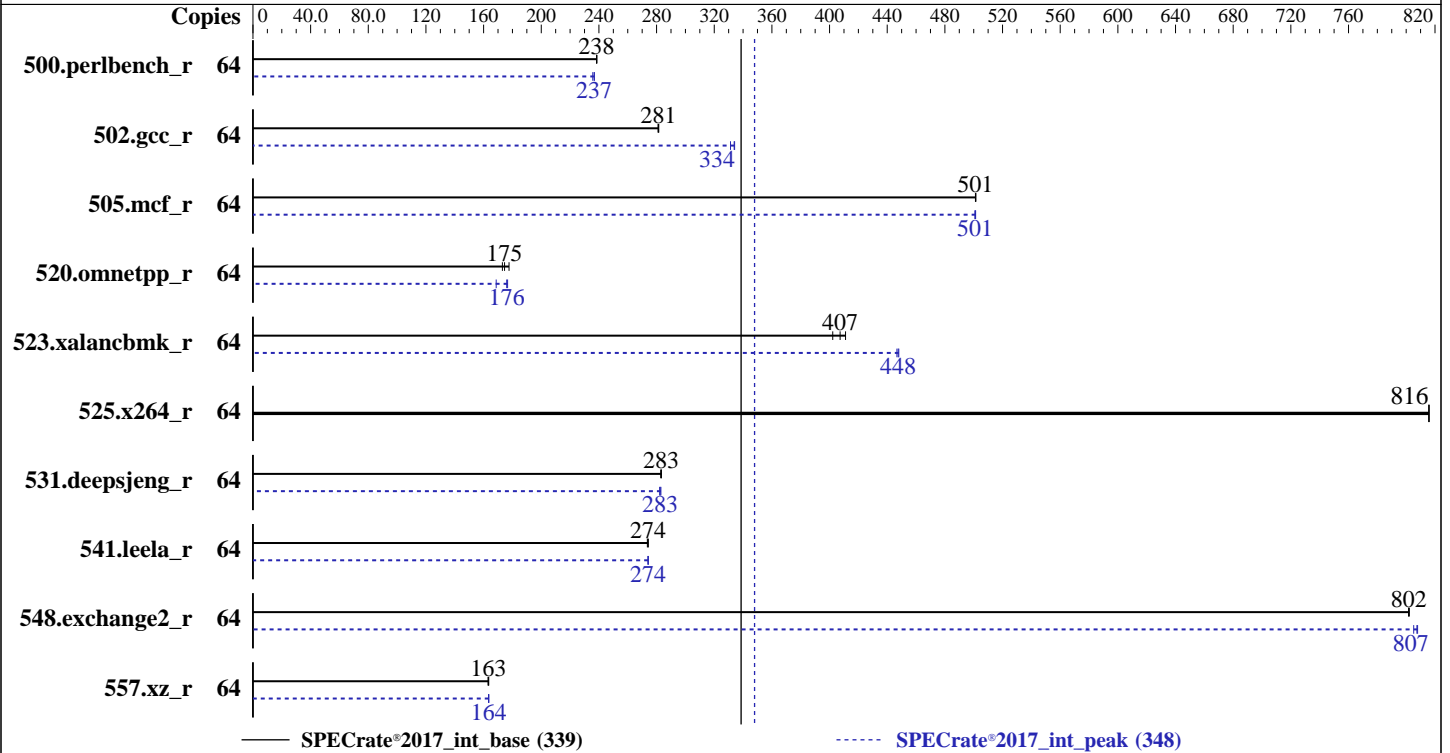

## Hardware

CPU Name: AMD EPYC 9124  
 Max MHz: 3700  
 Nominal: 3000  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1 TB NVMe  
 Other: None

## Software

OS: Ubuntu 20.04.4 LTS  
 kernel version 5.15.0-91-generic  
 C/C++/Fortran: Version 4.0.0 of AOCC  
 Compiler: No  
 Parallel: Version 1.6 released Nov-2023  
 Firmware: ext4  
 File System: Run level 3 (multi-user)  
 System State: 64-bit  
 Base Pointers: 32/64-bit  
 Peak Pointers: None  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	<b>427</b>	<b>238</b>	427	239	428	238	64	430	237	<b>430</b>	<b>237</b>	432	236
502.gcc_r	64	323	281	322	282	<b>322</b>	<b>281</b>	64	274	331	<b>271</b>	<b>334</b>	271	334
505.mcf_r	64	206	501	206	501	<b>206</b>	<b>501</b>	64	206	501	206	501	<b>206</b>	<b>501</b>
520.omnetpp_r	64	485	173	473	178	<b>481</b>	<b>175</b>	64	<b>477</b>	<b>176</b>	498	169	475	177
523.xalancbmk_r	64	168	402	<b>166</b>	<b>407</b>	164	411	64	<b>151</b>	<b>448</b>	151	448	151	447
525.x264_r	64	<b>137</b>	<b>816</b>	137	816	137	816	64	<b>137</b>	<b>816</b>	137	816	137	816
531.deepsjeng_r	64	<b>259</b>	<b>283</b>	259	283	259	283	64	259	283	260	282	<b>260</b>	<b>283</b>
541.leela_r	64	387	274	387	274	<b>387</b>	<b>274</b>	64	387	274	<b>387</b>	<b>274</b>	387	274
548.exchange2_r	64	<b>209</b>	<b>802</b>	209	802	209	802	64	208	808	<b>208</b>	<b>807</b>	208	805
557.xz_r	64	424	163	<b>423</b>	<b>163</b>	423	164	64	<b>423</b>	<b>164</b>	423	164	423	163

SPECrate®2017\_int\_base = **339**

SPECrate®2017\_int\_peak = **348**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"  
MALLOCONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOCONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd2-Super-Server Tue Jan 23 16:49:01 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

-----  
1. uname -a

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Platform Notes (Continued)

Linux amd2-Super-Server 5.15.0-91-generic #101~20.04.1-Ubuntu SMP Thu Nov 16 14:22:28 UTC 2023 x86\_64  
x86\_64 x86\_64 GNU/Linux

-----  
2. w  
16:49:01 up 3 min, 1 user, load average: 0.19, 0.39, 0.19  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 16:45 5.00s 1.67s 0.26s /bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh

-----  
3. Username  
From environment variable \$USER: root

-----  
4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 4126174  
nofiles 1024  
vmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

-----  
5. sysinfo process ancestry  
/sbin/init splash  
/bin/login -p --  
-bash  
python3 ./run\_amd\_rate\_aocc400\_znver4\_A1.py  
/bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh  
runcpu --config amd\_rate\_aocc400\_znver4\_A1.cfg --tune all --reportable --iterations 3 intrate  
runcpu --configfile amd\_rate\_aocc400\_znver4\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

-----  
6. /proc/cpuinfo  
model name : AMD EPYC 9124 16-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 25  
model : 17  
stepping : 1  
microcode : 0xa10113e  
bugs : sysret\_ss\_attrs spectre\_v1 spectre\_v2 spec\_store\_bypass rsro  
TLB size : 3584 4K pages  
cpu cores : 16  
siblings : 32  
2 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0-3,8-11,16-19,24-27  
physical id 1: core ids 0-3,8-11,16-19,24-27  
physical id 0: apicids 0-7,16-23,32-39,48-55  
physical id 1: apicids 64-71,80-87,96-103,112-119

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.34:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         52 bits physical, 57 bits virtual
CPU(s):                64
On-line CPU(s) list:  0-63
Thread(s) per core:    2
Core(s) per socket:   16
Socket(s):             2
NUMA node(s):         2
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 17
Model name:            AMD EPYC 9124 16-Core Processor
Stepping:              1
Frequency boost:      enabled
CPU MHz:               1500.000
CPU max MHz:           3711.9141
CPU min MHz:           1500.0000
BogoMIPS:              6000.18
Virtualization:        AMD-V
L1d cache:             1 MiB
L1i cache:             1 MiB
L2 cache:              32 MiB
L3 cache:              128 MiB
NUMA node0 CPU(s):    0-15,32-47
NUMA node1 CPU(s):    16-31,48-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:          Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass:  Mitigation; speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                  filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:             Not affected
Vulnerability Tsx async abort:    Not affected
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                  clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                  lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                                  rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                                  movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                                  cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                  topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                                  cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                                  fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                  rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                                  avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                  cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerpr rdpru

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

**SPECrate®2017\_int\_base = 339**

**SPECrate®2017\_int\_peak = 348**

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Platform Notes (Continued)

wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock nrip\_save tsc\_scale  
vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic  
v\_vmssave\_vmload vgif v\_spec\_ctrl avx512vbmi umip pku ospke avx512\_vbmi2  
gfni vaes vpc1mulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57  
rdpid overflow\_recov succor smca fsrm flush\_lld

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1M	8	Data	1
L1i	32K	1M	8	Instruction	1
L2	1M	32M	8	Unified	2
L3	16M	128M	16	Unified	3

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 515621 MB
node 0 free: 514351 MB
node 1 cpus: 16-31,48-63
node 1 size: 515996 MB
node 1 free: 514994 MB
node distances:
node  0  1
 0:  10  32
 1:  32  10
```

9. /proc/meminfo

```
MemTotal: 1056377592 kB
```

10. who -r

```
run-level 3 Jan 23 16:45
```

11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron apparmor autovt@ avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup network-manager networkd-dispatcher ondemand openvpn pppd-dns rsync rsyslog secureboot-db setvtrgb snapd ssh sshd switcheroo-control syslog systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw unattended-upgrades whoopsie wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell ipmievd openvpn-client@ openvpn-server@ openvpn@ rtkit-daemon serial-getty@ speech-dispatcher speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	apport ipmidrv openipmi
indirect	display-manager lightdm saned@ spice-vdagent spice-vdagentd uidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

sudo x11-common

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.15.0-91-generic
root=UUID=1ae71a13-cac0-48f6-b6e6-e15e5e687f57
ro
quiet
splash
vt.handoff=7
```

-----  
14. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

-----  
15. /sys/kernel/mm/transparent\_hugepage

```
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

-----  
16. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

-----  
17. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 20.04.4 LTS
```

-----  
18. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 938G 20G 871G 3% /
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

**SPECrate®2017\_int\_base = 339**  
**SPECrate®2017\_int\_peak = 348**

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Platform Notes (Continued)

-----  
19. /sys/devices/virtual/dmi/id  
Vendor: Tyrone Systems  
Product: Tyrone Camarero SDA200A2N-18  
Product Family: SMC H13  
Serial: A509935X3C01325  
-----

20. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x NO DIMM NO DIMM  
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800  
-----

21. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.6  
BIOS Date: 11/16/2023  
BIOS Revision: 5.27  
-----

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

**SPECrate®2017\_int\_base = 339**  
**SPECrate®2017\_int\_peak = 348**

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Compiler Version Notes (Continued)

| 557.xz\_r(base, peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C++ | 523.xalancbmk\_r(peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C++ | 523.xalancbmk\_r(peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-faggressive-loop-transform -fvector-transform
-fscalar-transform -lamdlibm -lflang -lamdalloc
```

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(3.00 GHz, AMD EPYC 9124)

SPECrate®2017\_int\_base = 339

SPECrate®2017\_int\_peak = 348

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -lamdalloc

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd\_rate\_aocc400\_znver4\_A\_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd\_rate\_aocc400\_znver4\_A\_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-23 06:19:00-0500.

Report generated on 2024-03-12 10:27:19 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-11.