



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL20 Gen11

(2.90 GHz, Intel Xeon E-2436)

SPECrate®2017\_fp\_base = 94.2

SPECrate®2017\_fp\_peak = 98.5

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

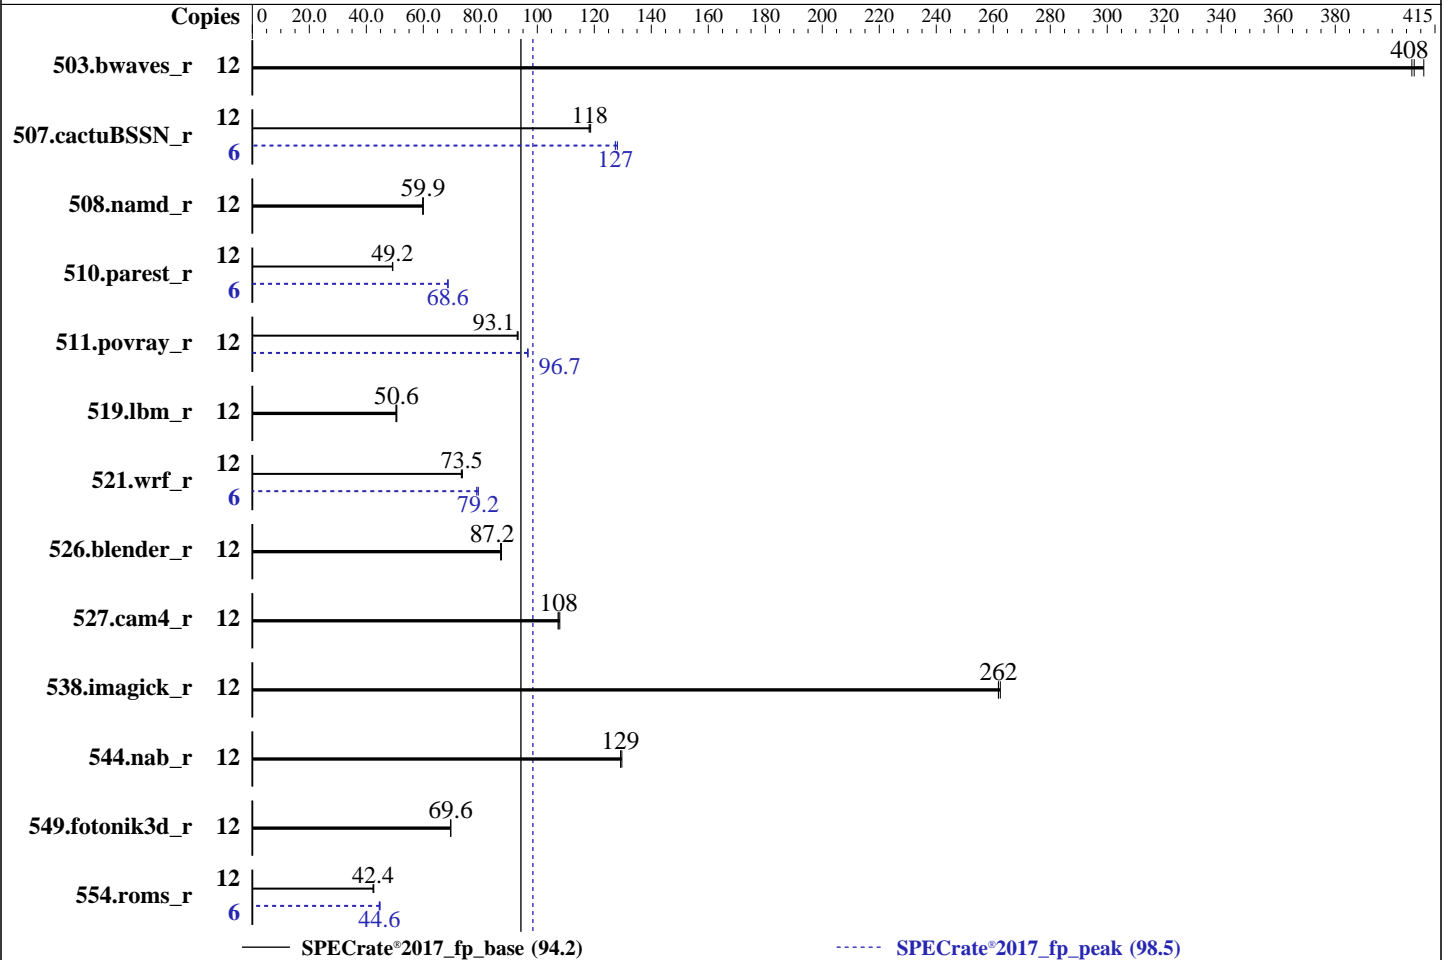

### Hardware

CPU Name: Intel Xeon E-2436  
 Max MHz: 5000  
 Nominal: 2900  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 Chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 18 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400), orderable using HPE part# P64339-B21  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v1.44 01/04/2024 released Jan-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL20 Gen11

(2.90 GHz, Intel Xeon E-2436)

SPECrate®2017\_fp\_base = 94.2

SPECrate®2017\_fp\_peak = 98.5

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	12	293	411	<b><u>295</u></b>	<b><u>408</u></b>	296	407	12	293	411	<b><u>295</u></b>	<b><u>408</u></b>	296	407
507.cactuBSSN_r	12	129	118	<b><u>128</u></b>	<b><u>118</u></b>	128	119	6	59.6	127	59.3	128	<b><u>59.6</u></b>	<b><u>127</u></b>
508.namd_r	12	<b><u>190</u></b>	<b><u>59.9</u></b>	191	59.8	190	60.0	12	<b><u>190</u></b>	<b><u>59.9</u></b>	191	59.8	190	60.0
510.parest_r	12	637	49.3	639	49.2	<b><u>638</u></b>	<b><u>49.2</u></b>	6	229	68.7	<b><u>229</u></b>	<b><u>68.6</u></b>	229	68.6
511.povray_r	12	<b><u>301</u></b>	<b><u>93.1</u></b>	301	93.0	301	93.2	12	290	96.7	290	96.6	<b><u>290</u></b>	<b><u>96.7</u></b>
519.lbm_r	12	249	50.7	251	50.4	<b><u>250</u></b>	<b><u>50.6</u></b>	12	249	50.7	251	50.4	<b><u>250</u></b>	<b><u>50.6</u></b>
521.wrf_r	12	365	73.7	<b><u>366</u></b>	<b><u>73.5</u></b>	367	73.3	6	171	78.7	170	79.3	<b><u>170</u></b>	<b><u>79.2</u></b>
526.blender_r	12	<b><u>210</u></b>	<b><u>87.2</u></b>	210	87.2	209	87.4	12	<b><u>210</u></b>	<b><u>87.2</u></b>	210	87.2	209	87.4
527.cam4_r	12	<b><u>195</u></b>	<b><u>108</u></b>	196	107	195	108	12	<b><u>195</u></b>	<b><u>108</u></b>	196	107	195	108
538.imagick_r	12	114	262	114	262	<b><u>114</u></b>	<b><u>262</u></b>	12	114	262	114	262	<b><u>114</u></b>	<b><u>262</u></b>
544.nab_r	12	<b><u>156</u></b>	<b><u>129</u></b>	156	130	156	129	12	<b><u>156</u></b>	<b><u>129</u></b>	156	130	156	129
549.fotonik3d_r	12	<b><u>672</u></b>	<b><u>69.6</u></b>	672	69.6	672	69.6	12	<b><u>672</u></b>	<b><u>69.6</u></b>	672	69.6	672	69.6
554.roms_r	12	447	42.6	<b><u>449</u></b>	<b><u>42.4</u></b>	450	42.4	6	213	44.8	214	44.5	<b><u>214</u></b>	<b><u>44.6</u></b>

SPECrate®2017\_fp\_base = **94.2**

SPECrate®2017\_fp\_peak = **98.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
tuned service was stopped using "systemctl stop tuned"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017\_new/lib/intel64:/home/cpu2017\_new/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL20 Gen11**

(2.90 GHz, Intel Xeon E-2436)

**SPECrate®2017\_fp\_base = 94.2**

**SPECrate®2017\_fp\_peak = 98.5**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x121 for the Intel Xeon E-2436 processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute  
Thermal Configuration set to Maximum Cooling  
Enhanced Processor Performance Profile set to Enabled

Sysinfo program /home/cpu2017\_new/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Feb 5 03:08:20 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----

1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
03:08:20 up 2:32, 1 user, load average: 0.07, 0.02, 0.00

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	pts/0	172.16.0.100	03:07	12.00s	0.67s	0.00s	-bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL20 Gen11**

(2.90 GHz, Intel Xeon E-2436)

**SPECrate®2017\_fp\_base = 94.2**

**SPECrate®2017\_fp\_peak = 98.5**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 256724
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 256724
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 -c
ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define smt-on --define cores=6 --define physicalfirst
--define no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 --configfile
ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define smt-on --define cores=6 --define physicalfirst
--define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.005/templots/preenv.fprate.005.0.log --lognum 005.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_new
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) E E-2436
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping      : 1
microcode     : 0x121
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 6
siblings      : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-11
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(2.90 GHz, Intel Xeon E-2436)

SPECrate®2017\_fp\_base = 94.2

SPECrate®2017\_fp\_peak = 98.5

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 48 bits virtual
Byte Order:             Little Endian
CPU(s):                 12
On-line CPU(s) list:   0-11
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) E E-2436
CPU family:             6
Model:                  183
Thread(s) per core:    2
Core(s) per socket:    6
Socket(s):              1
Stepping:               1
BogoMIPS:               5836.80
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                        clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves avx_vnni dtherm ida
                        arat pln pts umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid movdiri
                        movdir64b fsrm md_clear serialize pconfig arch_lbr flush_l1d
                        arch_capabilities

Virtualization:        VT-x
L1d cache:             288 KiB (6 instances)
L1i cache:             192 KiB (6 instances)
L2 cache:              12 MiB (6 instances)
L3 cache:              18 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):    0-11
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 1 nodes (0)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL20 Gen11**

(2.90 GHz, Intel Xeon E-2436)

**SPECrate®2017\_fp\_base = 94.2**

**SPECrate®2017\_fp\_peak = 98.5**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```
node 0 cpus: 0-11
node 0 size: 64203 MB
node 0 free: 63459 MB
node distances:
node 0
0: 10
```

```
-----
9. /proc/meminfo
MemTotal: 65744624 kB
```

```
-----
10. who -r
run-level 3 Feb 5 00:36
```

```
-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings lvm2-monitor
postfix purge-kernels rollback sshd wicked wickedd-auto4 wicked-dhcp4 wicked-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
grub2-once haveged-switch-root hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
systemd-sysexit systemd-time-wait-sync systemd-timesyncd tuned
indirect pcsd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=0568eef9-b0ff-4cd5-adb9-1f8e14da628c
splash=silent
resume=/dev/disk/by-uuid/ffb9593d-577b-484e-83b9-b995375d44ca
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(2.90 GHz, Intel Xeon E-2436)

SPECrate®2017\_fp\_base = 94.2

SPECrate®2017\_fp\_peak = 98.5

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

vm.compaction_proactiveness      20
vm.dirty_background_bytes        0
vm.dirty_background_ratio        10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017_new
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda3   xfs   344G  94G  251G  28% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     ProLiant DL20 Gen11
Product Family: ProLiant
Serial:      DA2G93DK88

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL20 Gen11**

(2.90 GHz, Intel Xeon E-2436)

**SPECrate®2017\_fp\_base = 94.2**

**SPECrate®2017\_fp\_peak = 98.5**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

2x Hynix HMC88AGBEA084N 32 GB 2 rank 5600, configured at 4400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.44  
BIOS Date: 01/04/2024  
BIOS Revision: 1.44  
Firmware Revision: 1.45

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
=====

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(2.90 GHz, Intel Xeon E-2436)

SPECrate®2017\_fp\_base = 94.2

SPECrate®2017\_fp\_peak = 98.5

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL20 Gen11**

(2.90 GHz, Intel Xeon E-2436)

**SPECrate®2017\_fp\_base = 94.2**

**SPECrate®2017\_fp\_peak = 98.5**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(2.90 GHz, Intel Xeon E-2436)

SPECrate®2017\_fp\_base = 94.2

SPECrate®2017\_fp\_peak = 98.5

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL20 Gen11**

(2.90 GHz, Intel Xeon E-2436)

**SPECrate®2017\_fp\_base = 94.2**

**SPECrate®2017\_fp\_peak = 98.5**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

554.roms\_r (continued):

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-RPL-rev2.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-RPL-rev2.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(2.90 GHz, Intel Xeon E-2436)

SPECrate®2017\_fp\_base = 94.2

SPECrate®2017\_fp\_peak = 98.5

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-04 16:38:19-0500.

Report generated on 2024-03-04 12:58:13 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.